

MS 90

1 609 92A B7M (2024.12) DOC / 1



1 609 92A B7M


Robert Bosch Power Tools GmbH

70538 Stuttgart
GERMANY

www.bosch-pt.com



BOSCH

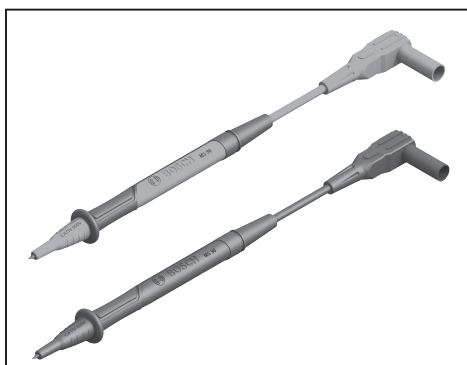

- ▶ Do not use the probe beyond the range.
- ▶ When using the test leads for measurement, make sure the test leads are set to the appropriate CAT level to ensure safety compliance.
- ▶ Do not use the test leads when test lead wire wear indicator is visible.
- ▶ If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired

Test Leads (Dual-end connecting)	MS 90
Dimension	900 mm
Measurement category	
– with cap	CAT IV 600 V CAT III 1000 V, 10 A
– without cap	CAT II 1000 V, 10 A
Operating altitude	up to 2000 m
Pollution grade	2
Operating humidity	0 to 80 % RH
Operating temperature	-10 to +50 °C
Storage humidity	0 to 80 % RH
Storage temperature	-15 to +60 °C

Features

Designed with double-insulated silicon cable and removable protective sheath; capable to measure current of 10A; applicable to all branded multimeters and clamp meters.

Symbols and their meaning



Warning! Consult the instructions.



Device with double or reinforced insulation

CAT II It is applicable to test and measuring circuits connected directly to utilization points (socket outlets and similar points) of the low-voltage MAINS installation.

CAT III It is applicable to test and measuring circuits connected to the distribution part of the buildings low-voltage MAINS installation.

CAT IV It is applicable to test and measuring circuits connected at the source of the buildings low-voltage MAINS installation.



Conforms to European Union directives

CSA

Conforms to CSA directives



Recycle bin

Only for EU countries:

Measuring tools that are no longer suitable for use and defective or used rechargeable batteries/batteries must be disposed of separately. Use the designated collection systems. If disposed incorrectly, waste electrical and electronic equipment may have harmful effects on the environment and human health, due to the potential presence of hazardous substances.

Only for United Kingdom:

According to The Waste Electrical and Electronic Equipment Regulations 2013 (SI 2013/3113) (as amended) and the Waste Batteries and Accumulators Regulations 2009 (SI 2009/890) (as amended), products that are no longer usable must be collected separately and disposed of in an environmentally friendly manner.