




Product data sheet

Power tools for trade & industry

Line Laser

GLL 20-22 G

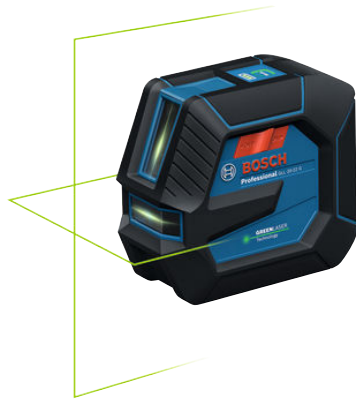

Easier alignment with our robust line laser

The most important data

| | |
|----------------------|------------|
| Working range, value | 20 m |
| Accuracy | ± 0.3 mm/m |
| Self-levelling range | ± 4° |

Part Number 0 601 065 600

Technical data

Technical data

| | |
|----------------------------|---|
| Battery voltage | 3.7 V |
| Laser diode | 500 – 540 nm, < 10 mW |
| Operating temperature | -10 – 50 °C |
| Storage temperature | -20 – 70 °C |
| Laser class | 2 |
| Working range, value | 20 m |
| Accuracy | ± 0.3 mm/m |
| Self-levelling range | ± 4° |
| Levelling time | 4 s |
| Dust and splash protection | IP 65 |
| Power supply | 3.7 V Li-Ion battery (3000 mAh), 4 x 1.5 V LR6 (AA) |
| Operating time (max.) | 8 h (Li-Ion) and 6 h (4 x AA) in cross line mode |
| Weight, approx. | 0.56 kg |
| Colour of laser line | green |
| Projection | 2 lines |

**BOSCH**

Invented for life

Product data sheet

Power tools for trade & industry

Advantages:

- IP65 rating and rubber-enforced housing for dust and water resistance
- U-shaped laser window for a wider fan-angle of the horizontal line
- Dual power source lets you switch between BA 3.7V 3.0Ah XL Li-Ion battery and AA alkaline batteries to help eliminate downtime

**PROTECTED TOOLS**
Impact | Water | Dust