

PRODUCT RANGE CATALOGUE 2020/2021

Professional Power Tools for Trade & Industry

It's in your hands. Bosch Professional.











IT'S IN YOUR HANDS. Bosch Professional.

We know exactly what tradesmen need in order to master every challenge. Therefore, Bosch Professional develops tools with maximum power and intelligence. For exceptional results and uncompromising working efficiency.

Ultimate performance meets maximum freedom. For all core and key applications, PROs can rely on the best cordless system in the market. Thanks to our most powerful batteries and our fastest charging technologies yet.

Bosch Professional ensures PROs can work safely. Tools with integrated PROtection features reduce the risk of injury or long-term health problems, thanks to sensor-based technologies that identify hazards. We respect the tough job PROs do, and so provide higher protection than is standard across the range.

Whatever tasks PROs face – it's part of our DNA to empower them to challenge the limits time and time again.

SUMMARY OF CONTENTS

3	PREFACE
6	SERVICES
8	REPAIR SERVICES
10	BOSCH PROTECTION
12	ACCESSORIES
14	PRODUCT INNOVATIONS



20	PROFESSIONAL 12V SYSTEM Batteries, Chargers, Tools	1
34	PROFESSIONAL 18V SYSTEM BITURBO, Click&Go, Batteries, Chargers, Tools	2
76	DRILL DRIVERS AND IMPACT DRIVERS/WRENCHES Drill drivers, Impact drivers/wrenches, Drywall screwdrivers, Combi drills	3
94	IMPACT DRILLS AND DRILLS	
	Impact drills, Drills and angle drills, Stirrers	4
102	ROTARY HAMMERS, DEMOLITION HAMMERS AND BREAKERS Rotary hammers with SDS plus / SDS max, Demolition hammers with SDS plus / SDS max, Breakers	5
120	DIAMOND TECHNOLOGY Concrete grinders, wall chasers and diamond tile cutters	6
124	WOODWORKING Belt sanders, random orbit sanders and orbital sanders, Routers, palm routers and biscuit jointers, Multi-cutters and multi rotary tools, Planers	7
142	SAWS Jigsaws, Reciprocating saws and band saws, Hand-held circular saws and plunge saws, Guide rail systems	8
160	BENCHTOP TOOLS Sliding mitre saws, Combination saws, Mitre saws, Table saws, Table saw stands, Saw stands for mitre and combination saws, Cold circular saws	9
170	ANGLE GRINDERS AND METALWORKING Large angle grinders, Small angle grinders, Straight grinders and polishers, Shears, nibblers and cutting grinders	10
194	DUST EXTRACTORS, GLUE GUNS AND HEAT GUNS Wet/dry dust extractors, Heat guns, Cordless blowers	11
200	LIGHTS, SOUNDS AND HEATED WORK WEAR Cordless worklights, Cordless radios, Heated work wear	12
206	DIGITAL MEASURING TOOLS Measuring tasks, Detection tasks, Levelling tasks, Accessories	13
237	OTHER OVERVIEWS Tool index	



PRO360 – YOUR DIGITAL CONTROL CENTRE.

3-year guarantee. Guaranteed free of charge.

1.1

Extend the guarantee of your Bosch Professional tools to 3 years. Completely free of charge and quickly on the service portal PRO360.

PR())360

It's in your hands. Bosch Professional.

05R 18V-60 C

A LOV S.O.A.

NCA GRA LOV S.BAN


A GRISTAN TORCAN

A GWS 189 10 C

Register & extend your guarantee



More info available under: www.boschpro360.uk



BOSCH AMERICAN AMERIC

A LAND DO LA COMPANY



PRO360 – YOUR DIGITAL CONTROL CENTRE.

Register. Extend the guarantee free of charge. Benefit in the long term.

YOUR ADVANTAGES

- You have everything at a glance: The digital tool list provides you with a perfect overview of your tools and their guarantees – irrespective of whether you're on the road or at the PC.
- You simply have it easier: You can scan identification plates really easily with your smartphone camera to take over your tools without detours directly in your digital inventory list.
- You also benefit in the future: PRO360 will provide you in the future with even more service offers.

OUR GUARANTEE PROMISE

Bosch power tools meet the strictest quality standards. For this reason, we are making you a special offer: Extend the guarantee now of your Bosch Professional tools to 3 years. Completely free of charge with a few clicks in PRO360 within 4 weeks after the purchase. The offer applies to all professional power and measuring tools.*

*This does not include high-frequency tools, industrial cordless screwdrivers, pneumatic tools and supplied accessories

NEW: We give you a 3-year guarantee on batteries and chargers.





You can obtain further information on the 3-year guarantee conditions in the service area of the Professional web page or directly under: https://www.bosch-professional.com/gb/en/guarantee/conditions Google Play and the Google Play logo are trademarks of Google LLC.

Apple and the Apple logo are trademarks of Apple Inc.



► ONLINE REPAIR SERVICE

With our online repair enquiry, you can commission us directly to carry out repair work on your tool – quickly and easily, either online or via the Toolbox app. We pick up and return your tool at no cost – and, of course, you receive the packaging label from us at no cost. We keep you updated on the repair status via e-mail.

Online repair is simple and easy:



- Products returned back from repair within
 5 working days *
- · Hassle-free instant repair quote
- Free collection, even if the warranty has expired (We may still charge delivery in cases where no Fixed Price Quotations are available)
- Comprehensive safety testing of all mechanical and electrical functions
- · Use of Bosch original spare parts
- · Repair status via e-mail
- · Repairs completed by qualified experts
- Three (3) month guarantee for all chargeable repairs *

* Subject to spare part availability

Service hotline T: 0344 7360109 E: boschservicecentre@bosch.com

► ONLINE SPARE PARTS SERVICE

Precise, safe and reliable:

Bosch offers the spare parts for your tools (such as angle grinders or drills): From the armature and carbon brushes, through to batteries and chargers.

Order your original spare part from our online shop by 3.30 p.m. and your part will usually be delivered* on the next working day.

* Please note that spare parts must only be fitted by qualified personnel.

The benefits for you:

- $\cdot\,$ Spare parts are easy to select via an exploded drawing
- Fast delivery thanks to the high availability of spare parts
- Spare parts are usually available for 8–10 years after a series is discontinued







► CALIBRATION SERVICE

We take on the job of calibrating your measuring tools so that you can work reliably and all of your tools comply with the legal requirements and standards. Our own test laboratory with special test benches complies with requirements in accordance with ISO 9000ff. The Bosch calibration service is fast, precise and reliable.

Our calibration services:

- \cdot Cleaning the tool
- \cdot Checking the measuring accuracy
- · If required: Adjusting of the tool
- Documenting all measured values, including calibration certificate

We also offer the following services:

- · Maintenance service
- · Recycling

All of these services can be easily ordered using the online repair form at www.bosch-professional.uk/onlinerepair – please enter the keyword "calibration" or "maintenance" in the comment field.



YOU DO THE JOB. WE MAKE IT SAFER.

Intelligent PROtection makes powerful work safer.





We at Bosch Professional develop and manufacture power tools with integrated, active PROtection features – innovative tools that reduce the risk of injury or long-term diseases independently, while providing you best performance even under the toughest conditions.

► ACTIVE:

Safer work – thanks to integrated, active PROtection solutions that work independently.

► INTELLIGENT:

Reduction of risks – thanks to sensorbased technologies that identify dangers and intervene as a precautionary measure.

► COMPREHENSIVE:

Higher protection than standard across the range – thanks to a broad selection of PROtection features based on proven Bosch technology in more than 200 Bosch Professional power tools.



THE BEST YOUR TOOL CAN GET.

Revolutionise your work with the correct accessories for your professional tools.



Bosch Professional develops accessories for your needs as a tradesperson and continually optimises them for today's changing job site. Our accessories offer you the incredible versatility that you require, and we believe in the right tool for the right job – and the right accessories for every tool!

PRODUCT INNOVATIONS



Battery 1 x GBA 12V 2.0Ah + 1 x GBA 12V 4.0Ah + GAL 12V-40 (see page 25)



Charger GAA 12V-21 (see page 25)





Drill driver GSR 12V-35 (see page 26)

BRUSHLESS MOTOR



Drill driver GSR 12V-35 FC (see page 27)



Impact driver/wrench **Bosch GO** (see page 27)



Combi drill GSB 12V-35 (see page 29)



Battery ProCORE18V 5.5Ah (see page 45)



Battery 1 x ProCORE18V 4.0Ah + GAL 18V-40 (see page 46)

Battery 2 x ProCORE18V 4.0Ah + GAL 18V-40 (see page 46)







Battery 2 x ProCORE18V 8.0Ah + GAL 18V-160 C + GCY 42 (see page 46)



Battery 2 x ProCORE18V 12.0Ah + GAL 18V-160 C + GCY 42 (see page 47)





Charger GAL 18V-160 C & GCY 42 (see page 47)



Charger GAL 18V6-80 (see page 47)



Drill driver GSR 18V-55 (see page 49)

MOTOR



Drill driver GSR 18V-60 C (see page 50)

MOTOR

MOTOR



Drill driver GSR 18V-110 C (see page 50)

MOTOR





Impact driver/wrench GDS 18V-200 C (see page 51)



Impact driver/wrench GDS 18V-300 (see page 51)



Combi drill GSB 18V-21 (see page 53)



Combi drill **GSB 18V-28** (see page 53)



Combi drill GSB 18V-55 (see page 54)

MOTOR



Combi drill GSB 18V-60 C (see page 54)





Combi drill GSB 18V-110 C (see page 55)



PRODUCT INNOVATIONS



Rotary hammer GBH 18V-26 D (see page 58)



Rotary hammer GBH 18V-45 C (see page 58)



Reciprocating saw and band saw GCB 18V-63 (see page 61)



Hand-held circular saw GKS 18V-68 C (see page 62)



Hand-held circular saw GKS 18V-68 GC (see page 63)



Plunge saw GKT 18V-52 GC (see page 64)



Sliding mitre saw GCM 18V-216 (see page 64)



Angle grinder GWS 18V-10 (see page 65)



Angle grinder GWS 18V-15 C (see page 67)



Angle grinder GWS 18V-15 SC (see page 67)



Angle grinder GWX 18V-8 (see page 68)



Angle grinder GWX 18V-10 (see page 68)





Angle grinder GWX 18V-10 C (see page 68)



Angle grinder GWX 18V-10 PC (see page 68)



Angle grinder GWX 18V-10 SC (see page 69)



Angle grinder GWX 18V-10 PSC (see page 69)



Angle grinder GWX 18V-15 SC (see page 69)



Straight grinder GGS 18V-10 SLC (see page 69)



Straight grinder GGS 18V-23 LC (see page 70)




Straight grinder GGS 18V-23 PLC (see page 70)



Dust extractor GAS 18V-10 L (see page 71)



Dust extractor GDE 18V-26 D (see page 72)



Worklight GLI 18V-4000 C (see page 73)



Worklight GLI 18V-10000 C (see page 74)

PRODUCT INNOVATIONS



Random orbit sander GET 55-125 (see page 127)



Random orbit sander GET 75-150 (see page 127)



Random orbit sander GEX 34-150 (see page 128)



Random orbit sander GEX 40-150 (see page 128)



Sliding mitre saw GCM 18V-305 GDC (see page 162)



Table saw GTS 635-216 (see page 166)



Table saw stand GTA 560 (see page 168)



Small angle grinder GWS 18V-10 (see page 178)



Small angle grinder GWX 750-115 (see page 185)



Small angle grinder GWX 9-115 S (see page 185)



Thermo detector GTC 400 C (see page 215)



Metal detector D-tect 120 wallscanner (see page 217)





Combi laser GCL 2-50 G (see page 222)



Line laser GLL 2-15 G (see page 222)



Line laser GLL 3-80 G (see page 223)



Line laser GLL 3-80 C (see page 223)



Line laser GLL 3-80 CG (see page 223)



Rotation laser GRL 600 CHV (see page 226)





The perfect choice for PROs who don't want to miss out on flexibility, performance and compactness.

Summary of contents

25	Batteries
25	Chargers
27	Drill drivers
27	Screwdriver
28	Impact drivers/wrenches
28	Drywall screwdrivers
29	Combi drills
29	Palm router
30	Multi-cutters and multi rotary tools
30	Planer
31	Jigsaw
31	Hand-held circular saw
31	Angle grinder
32	Shears
32	Dust extractor
33	Worklights
33	Inspection camera



COMPACT PERFORMANCE. MAXIMUM FREEDOM.

The compact choice for full performance. Ideal for PROs who need uncompromising versatility, compatibility and power.





The Professional 12V System offers you all the performance you need in a handy format and is the ideal choice for PROs looking for added versatility without compromising on power. The high-capacity batteries can be used with a wide variety of professional system tools. COMPACT PERFORMANCE:
 Compact performance tools that are light, versatile and offer maximum power.

► ONE BATTERY FITS ALL:

Compatible since 2005 – all of our batteries are compatible with new and existing Bosch Professional tools in the 12V and 10.8V class.

► MAXIMUM FREEDOM:

Choose between solo tools, batteries, chargers or kits to expand your system the way you want and get the best battery for your job.

BATTERIES

BATTERY GBA 12V 2.0Ah Professional



BATTERY GBA 12V 3.0Ah Professional



Part number	1 600 A00
Battery voltage	12 V
Weight	180 g
Comes complete with	X79
1 x battery GBA 12V 3.0Ah (1 600 A00 X79)	х
Cardboard box	x

BATTERY

12 🕎 🕎



BATTERY

GBA 12V 2.5Ah W Wireless Charging Professional



BATTERY 2 x GBA 12V 2.0Ah + GAL 12V-40 Professional



Part number	1 600 A01
Battery voltage	12 V
Weight (battery)	175 g
Weight (charger)	450 g
Comes complete with	9R9
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	х
Cardboard box	х
Quick charger GAL 12V-40 Professional (1 600 A01 9R4)	х

BATTERY 2 x GBA 12V 3.0Ah + GAL 12V-40 Professional



Technical data	
Part number	1 600 A01
Battery voltage	12 V
Weight (battery)	175 g
Weight (charger)	450 g
Comes complete with	9RE
2 x battery GBA 12V 3.0Ah (1 600 A00 X79)	х
Cardboard box	x
Quick charger GAL 12V-40 Professional (1 600 A01 9R4)	X

BATTERIES, CHARGERS

BATTERY

2 x GBA 12V 6.0Ah + GAL 12V-40 Professional



LI-ION	12 v	ro Set Marson	122V 4 2000V 300% controlling

Technical data	
Part number	1 600 A01
Battery voltage	12 V
Weight (battery)	365 g
Weight (charger)	450 g
Comes complete with	B21
2 x battery GBA 12V 6.0Ah (1 600 A00 X7H)	x
Cardboard box	x
Quick charger GAL 12V-40 Professional (1 600 A01 9R4)	X

CHARGER NEW! Technical data 0 618 800 80 g Weight .. 079 nes complete board bo

BATTERY

NEW! 1 x GBA 12V 2.0Ah + 1 x GBA 12V 4.0Ah + **GAL 12V-40 Professional**



Technical data	
Part number	1 600 A01
Battery voltage	12 V
Weight (battery)	175 g
Weight (charger)	450 g
Comes complete with	ND0
1 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	x
1 x battery GBA 12V 4.0Ah (1 600 A00 1BX)	x
Cardboard box	x
Quick charger GAL 12V-40 Professional	x



CHARGER GAL 12V-40 Professional

12V



Technical data	
Part number	1 600 A01
Battery charging voltage	10,8 - 12 V
Weight	450 g
Comes complete with	9R4
Cardboard box	х
Quick charger GAL 12V-40 Professional (1 600 A01 9R4)	X

CHARGER GAX 18V-30 Professional

USB Technical dat



Part number	1 600 A01
Battery charging voltage	12 V - 18V
Weight	800 g
Comes complete with	1AA
Charger GAX 18V-30 (1 600 A01 1AA)	х
Cardboard box	x

DRILL DRIVERS

DRILL DRIVER GSR 12V-15 Professional





Technical data		
Part number	0 601 868	
Battery voltage	12 V	
Torque (soft/hard/max.)	15/30/- Nm	
No-load speed (1st gear / 2nd gear)	0 – 400 / 0 – 1.300 rpm	
Max. screw diameter	7 mm	
Max. drilling diameter in wood	19 mm	
Max. drilling diameter in steel	10 mm	
Comes complete with	101	
1/2 L-BOXX inlay for tool (1 600 A00 2V8)	х	
Cardboard box	х	

DRILL DRIVER GSR 12V-15 FC Professional





Technical data			
Part number	0 601 9F6		
Battery voltage	12 V		
Torque (soft/hard/max.)	15/30/- Nm		
No-load speed (1st gear / 2nd gear)	0 - 400 / 0 - 1.3	300 rpm	
Max. screw diameter	7 mm		
Max. drilling diameter in wood	19 mm		
Max. drilling diameter in steel	10 mm		
Comes complete with	002	070	071
1/2 L-BOXX inlay 12 V adapters (1 600 A01 1UW)	х	х	х
1/2 LBOXX inlay for tool and charger (1 600 A00 2UV)	x	x	x
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	x	x
Angle adapter GFA 12-W Professional (1 600 A00 F5K)	-	x	-
Bit holder adapter GFA 12-X (1 600 A00 F5J)	-	x	-
Drill chuck adapter GFA 12-B (1 600 A00 F5H)	х	х	х
L-BOXX 102 (1 600 A01 2FZ)	x	x	x
Offset angle adapter GFA 12-E (1 600 A00 F5L)	-	х	-
Quick charger GAL 1230 CV (1 600 A01 16B)	-	x	x



DRILL DRIVER GSR 12V-35 Professiona	I	NEW!
Technical data		
Part number	0 601 9H8	
Battery voltage	12 V	
Torque (soft/hard/max.)	20/35/- Nm	
No-load speed (1st gear / 2nd gear)	0 – 460 / 0 – 1.750 rpm	
Max. screw diameter	8 mm	
Max. drilling diameter in wood	32 mm	
Max. drilling diameter in steel	10 mm	
Comes complete with	070	
2 x battery GBA 12V 3.0Ah (1 600 A00 X79)	х	
L-BOXX 102 (1 600 A01 2FZ)	x	
Quick charger GAL 12V-40 Professional (1 600 A01 9R4)	x	_

DRILL DRIVER, SCREWDRIVER, IMPACT DRIVERS/WRENCHES

DRILL DRIVER GSR 12V-35 FC Professional

Constant Lange 1750 Nm 35/20



Technical data			
Part number	0 601 9H3		
Battery voltage	12 V		
Torque (soft/hard/max.)	20/35/- Nm		
No-load speed (1st gear / 2nd gear)	0 - 460 / 0 - 1	.750 rpm	
Max. screw diameter	8 mm		
Max. drilling diameter in wood	32 mm		
Max. drilling diameter in steel	10 mm		
Comes complete with	002	003	004
Angle adapter GFA 12-W Professional (1 600 A00 F5K)	-	x	-
Bit holder adapter GFA 12-X (1 600 A00 F5J)	-	x	-
Cardboard box	-	-	x
Drill chuck adapter GFA 12-B (1 600 A00 F5H)	х	x	-
L-BOXX 102 (1 600 A01 2FZ)	x	x	-
Offset angle adapter GFA 12-E (1 600 A00 F5L)	-	x	-

		≡0)
		MOT	¢R.
Technical data			
Part number	0 601 9D4		
Comes complete with	102	170	
1 x belt clip, 1 x bit holder, 4 x colour clip	x	x	
1/2 L-BOXX inlay for accessories (1 600 A00 2WY)	-	x	
1/2 L-BOXX inlay for tool (1 600 A00 2WX)	х	х	
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	х	
Cardboard box	х	-	
L-BOXX 102 (1 600 A01 2FZ)	-	х	
Quick charger GAL 1230 CV (1 600 A00 R44)	-	x	

SCREWDRIVER Bosch GO 3.6V Professional



NEW!

	5/2.5 Nm	

Technical data



Part number	0 601 9H2
Battery voltage	3.6 V
Comes complete with	170
1 x screwdriver bit PH2 (2 608 521 M11)	x
25-piece screwdriver bit set	x
L-BOXX Mini (1 605 438 1GK)	x
Micro USB cable (1 607 000 CG9)	x
USB adapter (2 609 120 718)	x

IMPACT DRIVER GDR 12V-105 Professional

SCREWDRIVER

GSR 12V-20 HX Professional



1/2 L-BOXX inlay for accessories (1 600 A00 2WY)	-	x
1/2 L-BOXX inlay for tool (1 600 A00 2V8)	х	-
1/2 L-BOXX inlay for tool and charger (1 600 A00 2V2)	-	x
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	х
Cardboard box	х	-
L-BOXX 102 (1 600 A01 2FZ)	-	х
Quick charger GAL 1230 CV (1 600 A01 16B)	-	х
Quick charger GAL 12V-40 Professional (1 600 A01 9R4)	-	x

IMPACT DRIVERS/WRENCHES, DRYWALL SCREWDRIVER

IMPACT DRIVER GDR 12V-110 Professional

)	5
110 Nm 2600 3100 bpm	
Technical data	

Part number	0 601 9E0
Battery voltage	12 V
Torque, max.	110 Nm
Screw diameter	M 4 – M 12
No-load speed (1st level)	0-1.200 rpm
Impact rate	0-3.100 bpm
Tool holder	1/4" internal hexagon
Comes complete with	002
Cardboard box	х
L-BOXX inlay for tool	х

IMPACT WRENCH

30° seccol secol		
Nm min typen bpm		MOTOR
Technical data	0.001.050	
Part number	0 601 9E0	
Battery voltage	12 V	
Torque, max.	115 Nm	
Screw diameter	M 4 – M 12	
No-load speed	0-2.600 rpm	
No-load speed (1st level)	0-1.200 rpm	
Impact rate	0-3.100 bpm	
Tool holder	3/8" external square	
Comes complete with	101	
Cardboard box	x	
L-BOXX inlay for tool	х	

DRYWALL SCREWDRIVER MA55 Professional



DRYWALL SCREWDRIVER GTB 12V-11 Professional

Technical data			
Part number	0 601 9E4		
Battery voltage	12 V		
Torque, max. (hard/soft)	11 / 3 Nm		
No-load speed	0 – 3.000 rpm		
Max. screw diameter	4 mm		
Comes complete with	002	003	070
1 x screwdriver bit PH 2	x	х	x
1/2 L-BOXX inlay for charger and battery	-	х	x
1/2 L-BOXX inlay for tool (1 600 A00 3RB)	х	х	x
2 x battery GBA 12V 2.5Ah (1 600 A00 4ZL)	-	-	x
Cardboard box	х	-	-
L-BOXX 102 (1 600 A01 2FZ)	-	x	x
Quick charger GAL 1230 CV (1 600 A01 16B)	-	-	x

COMBI DRILLS, PALM ROUTER

COMBI DRILL GSB 12V-15 Profession	nal	COMBI DRILL GSB 12V-35 Professiona 1750 Example Company Compan		NEW!
Image: Constraint of the second se	J	Technical data		
Part number	0 601 9B6	Part number	0 601 9J9	
Battery voltage	12 V	Battery voltage	12 V	
Torque (soft/hard/max.)	15/30/- Nm	Torque (soft/hard/max.)	20/35/- Nm	
No-load speed (1st gear / 2nd gear)	0 - 380 / 0 - 1.300 rpm	No-load speed (1st gear / 2nd gear)	0 – 460 / 0 – 1.750 rpm	
Max. screw diameter	7 mm	Max. screw diameter	8 mm	
Max. drilling diameter in wood	19 mm	Max. drilling diameter in wood	32 mm	
Max. drilling diameter in masonry	10 mm	Max. drilling diameter in masonry	10 mm	
Max. drilling diameter in steel	10 mm	Max. drilling diameter in steel	10 mm	
Comes complete with	901	Comes complete with	002	070
1/2 L-BOXX inlay for tool and charger (1 600 A00 2UV)	x	1/2 L-BOXX inlay for tool and charger (1 600 A00 2V2)	х	x
Cardboard box	x	Cardboard box	x	-
		2 x battery GBA 12V 3.0Ah (1 600 A00 X79)	-	х
		Quick charger GAL 12V-40 Professional (1 600 A01 9R4)	-	x
		L-BOXX 102 (1 600 A01 2FZ)	-	x
		1/2 L-BOXX inlay for accessories (1 600 A00 2WY)	-	x

PALM ROUTER GKF 12V-8 Professional

Technical data			
Part number	0 601 6B0		
Battery voltage	12 V		
No-load speed	13.000 rpn		
Compatible collet diameters Weight excl. battery	6 mm / 8 n 1.1 kg	nm / 1/4"	
Comes complete with	070	071	072
2 x battery GBA 12V 3.0Ah (1 600 A00 X79)	070 X		072
Collet with nut 1/4" (1 600 A00 H85)	x	x	x
L-BOXX 136 (1 600 A01 2G0)	x	-	-
Open-ended spanner 17 mm (spare part number 2 609 110 438)	x	x	x
Quick charger GAL 1230 CV (1 600 A01 16B)	x	-	-
· · · ·			

MULTI-CUTTERS AND MULTI ROTARY TOOLS, PLANER

1

MULTI-CUTTER GOP 12V-28 Professional

	E-1		
Technical data			
Part number	0 601 8B5		
Battery voltage	12 V		
No-load rotation	5.000 - 20.000	opm	
Oscillation angle on left and right	1.4 °		
Comes complete with	001	002	070
1 x Starlock BIM plunge cut saw blade All 65 APB,	-	-	х

x
x
x
x
x
x
x
x
x
-
-
x
x

ROTARY TOOL GRO 12V-35 Professional



Part number	0 601 9C5	
Battery voltage	12 V	
No-load speed	5.000 - 35.000 rpm	
Comes complete with	000	070
1 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	х
1/2 LBOXX inlay for battery and charger (1 600 A00 2WV)	-	x
1/2 L-BOXX inlay for tool (1 600 A00 2WY)	х	x
Accessory box	х	x
Arbour (2 610 927 731)	х	x
Cardboard box	х	-
Collet (1 619 P11 363)	х	х
Cutting disc (2 615 110 426)	х	x
Housing adapter (1 619 P11 344)	х	х
Key (2 610 930 692)	х	х
L-BOXX 102 (1 600 A01 2FZ)	-	x
Quick charger GAL 12V-40 Professional (1 600 A01 9R4)	-	x

PLANER GHO 12V-20 Professional

Image: Second state				
Part number	0 601 5A7			
No-load speed	14,500 rpm			
Planing width, max.	56 mm			
Rebating depth	0 – 17 mm			
Planing depth	0 – 2 mm			
Comes complete with	070	07	/1	072
2 x battery GBA 12V 3.0Ah (1 600 A00 X79)	-	X		
2 x planer blade, 56 x 5.5 x 1.1 mm (2 608 000 672)	x	x	x	
Cardboard box	-	-	-	
L-BOXX 136 (1 600 A01 2G0)	-	х	х	
Quick charger GAL 1230 CV (1 600 A00 R44)	-	x	-	

JIGSAW, HAND-HELD CIRCULAR SAW, ANGLE GRINDER, SHEAR

JIGSAW GST 12V-70 Professional



Technical data		
Part number	0 601 5A1	
Battery voltage	12 V	
Stroke rate at no load	1.500 - 2.800 spm	
Cutting depth in wood	70 mm	
Mitre cuts	0-45 °	
Comes complete with	001	070
1 x jigsaw blade T 144 D, Speed for Wood (available separately as set of 3: 2 608 630 560)	х	x
1 x jigsaw blade T 308 B, Extra-clean for Wood (available separately as set of 3: 2 608 663 750)	x	x
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	x
Anti-splinter guard	x	х
Cardboard box	x	-
Dust extraction set	x	х
Glide shoe	x	x
L-BOXX 102 (1 600 A01 2FZ)	-	х
0.000/11/	x	x
L-BOXX inlay		

HAND-HELD CIRCULAR SAW GKS 12V-26 Professional





Technical data			
Part number	0 601 6A1		
Battery voltage	12 V		
No-load speed	1.400 rpm		
Max. cutting capacity in wood (90°)	26.5 mm		
Max. cutting capacity in wood (45°)	17 mm		
Saw blade diameter	85 mm		
Saw blade bore diameter	15 mm		
Comes complete with	001	002	070
1 x circular saw blade, Standard for Wood, 85 x 15 x 1.1 mm, 20 (2 608 643 071)	x	x	x
1/2 L-BOXX inlay for charger (1 600 A00 2WY)	-	x	x
1/2 L-BOXX inlay for tool (1 600 A00 2WU)	x	x	x
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	-	x
Cardboard box	x	-	-
Dust extraction adapter	х	x	x
Hex key	x	х	х
L-BOXX 136 (1 600 A01 2G0)	-	x	х
L-BOXX 136 (1 600 A01 2G0) Parallel guide/guide rail adapter (1 619 P10 829)	- x	x x	x x

ANGLE GRINDER GWS 12V-76 Professional



Technical data		
Part number	0 601 9F2	
Battery voltage	12 V	
No-load speed	19.500 rpm	
Grinding/cutting disc, diameter	76 mm	
Bore size, diameter	10.0 mm	
Grinding spindle thread	M 5	
Comes complete with	000	003
1 x carbide cutting disc, Carbide Multiwheel, 76 x 10 mm (2 608 623 011)	x	х
1/2 L-BOXX inlay for charger and battery	-	х
1/2 L-BOXX inlay for GWS 12V-76 (1 600 A00 F0F)	x	x
2 x inox cutting disc, Expert for Inox, 76 x 10 mm (available separately as set of 5: 2 608 601 520)	x	x
Cardboard box	x	-
L-BOXX 102 (1 600 A01 2FZ)	-	х
Protective guard (2 608 000 632)	x	х

SHEAR GUS 12V-300 Professional



Part number	0 601 9B2
Battery voltage	12 V
No-load stroke rate	700 spm
Comes complete with	972
1/2 L-BOXX inlay for charger (1 600 A00 2VN)	x
1/2 L-BOXX inlay for tool (1 600 A00 2W3)	x
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	x
L-BOXX 102 (1 600 A01 2FZ)	x
Quick charger GAL 1230 CV (1 600 A01 16B)	x

SHEAR, DUST EXTRACTOR, WORKLIGHTS

SHEAR GUS 12V-300 Professional



Battery voltage	12 V
No-load stroke rate	700 spm
Comes complete with	901
1/2 L-BOXX inlay for tool (1 600 A00 2W3)	х
Cardboard box	x

LI-ION 🎓 🖌 👘 12 V 10.8 Technical data 0 601 9E3 Battery voltage 12 V Container volume 0.351 Filter surface area 408 cm² Max. vacuum pressure (turbine) 45 mbar Max. airflow rate (turbine) 15.0 l/s Comes complete with 1 x flat-pleated filter (2 607 432 046) ... 000 х Crevice nozzle (spare part number 1 600 A00 2PP) x

WORKLIGHT GLI 12V-80 Professional



WORKLIGHT GLI 12V-300 Professional

DUST EXTRACTOR

GAS 12V Professional



WORKLIGHT, INSPECTION CAMERA

WORKLIGHT GLI 12V-330 Professio	onal
Technical data Part number Battery voltage	0 601 4A0 12 V
Max. operating time 12 V Weight excl. battery Comes complete with	180 mins/Ah 0.3 kg 000
Cardboard box	x

INSPECTION CAMERA GIC 120 C Professional





Technical data	
Part number	0 601 241
Battery voltage	12 V
Display size	3.5 "
Display resolution	320 x 240 px
Diameter of camera head	8.5 mm
Length of camera cable	120 cm
Comes complete with	200
4 x 1.5 V LR6 battery (AA)	x
4GB MicroSD card	x
AA1 alkaline battery adapter (1 608 M00 C1B)	x
Camera cable for GIC 120 C, 8.5 mm diameter, 120 cm long (1 600 A00 9B9)	x
Hook, magnet, mirror	x
L-BOXX inlay	x
Micro USB cable	x





The Professional 18V System combines ultimate performance with compact dimensions and minimum weight to make your toughest job easier – with professional tools, our most powerful batteries ever and the fastest charging solutions.

	Summary of contents
38	BITURBO
42	Click&Go
47	Batteries
48	Chargers
50	Drill drivers
52	Impact drivers/wrenches
52	Drywall screwdrivers
55	Combi drills
59	Rotary hammers
59	Orbital sander
60	Multi-cutters and multi rotary tools
60	Jigsaws
62	Reciprocating saws and band saws
64	Hand-held circular saws
64	Plunge saw
64	Sliding mitre saw
69	Angle grinders
70	Straight grinders
70	Shear
72	Dust extractors
72	Caulk gun
74	Worklights



ULTIMATE PERFORMANCE. MAXIMUM FREEDOM.

Professional tools combined with our most powerful batteries and fastest charging technology.





Benefit from our system with ultimate performance, uncompromising compatibility and maximum freedom on your job site. Our batteries with superior heat management, extended runtime and longer lifetime support your working efficiency.

► ULTIMATE PERFORMANCE:

Cordless freedom with corded performance – thanks to professional tools, our most powerful batteries ever and the fastest charging technologies combined with compact dimensions and minimum weight.

► ONE BATTERY FITS ALL:

Compatible since 2008 – all of our batteries are compatible with new and existing Bosch Professional tools in the same voltage class.

► MAXIMUM FREEDOM:

Choose between solo tools, batteries, chargers or kits to expand your system the way you want.



REVOLUTIONARY PERFORMANCE. FEEL THE EXTREME.

BITURBO tools set new standards in performance with less weight and maximum oomph.

BITURBO BRUSHLESS







BITURBO Brushless: Up to 1,800 watts of corded power.

- MAXIMUM POWER: Maximum output in combination with ProCORE18V batteries. Up to 1,800 watts of corded power.
- PERFECT HANDLING: BITURBO tools are lightweight, compact and impress with perfect ergonomics. With just one ProCORE18V battery, they perform as well as competitor tools with two batteries.
- ULTIMATE CONTROL: Multiple clever technologies make your work safer, faster and more efficient.
- FULLY COMPATIBLE: Compatible with all new and existing batteries and chargers from the Professional 18V System. For maximum power, use ProCORE18V 8.0 or 12.0 Ah batteries.

BITURBO. A NEW STANDARD IN PERFORMANCE.



¹ Corded GWS 13-125 CIE vs. cordless GWX 18-15 SC incl. ProCORE18V 8.0Ah. ² As of 02/2020. Weight of GBH 18V-45 C incl. ProCORE18V 12.0 Ah according to EPTA Procedure 01:2014 = 9.3 kg. ³ Comparable performance to corded GBH 8-45 DV. ⁴ As of 02/2020. Resulting out of 150mm holes with 25mm Drill Bit in Concrete C30/37 using ProCORE18V 12.0Ah. Tested by DEKRA Testing and Certification GmbH (Test Report 3414140.04) on behalf of Bosch Power Tools GmbH ⁵ As of 02/2020. 58 Joule Impact Energy according to EPTA Procedure 05:2016. ⁶ As of 02/2020. At 25mm drilling in concrete C30/37 using ProCORE18V 8.0Ah. Tested by DEKRA Testing and Certification GmbH (Test Report 3414140.05) on behalf of Bosch Power Tools GmbH.⁷ 65 GCE vs. cordless GKS 18V-68 GC incl. ProCORE18V 8.0Ah. ^a As of 02/2020. Tested by DEKRA Testing and Certification GmbH (Test Report 341653200) on behalf of Bosch Power Tools GmbH.





YOUR FLEXIBLE CHOICE. YOUR MAXIMUM FREEDOM.



42 | Professional Power Tools for Trade & Industry



Professional Power Tools for Trade & Industry | 43

BATTERIES

DATTON

GBA 18V	CoolPack	Professional
		TTOTOSSIONAL



BATTERY **GBA 18V 3.0Ah Coolpack Professional**



Part number	1 600 Z00
Battery voltage	18 V
Weight	600 g
Comes complete with	037
Cardboard box	х

BATTERY

Weight

GBA 18V 3.0Ah Compact Coolpack Professional



GBA 18V 4.0Ah CoolPack Professional





BATTERY **GBA 18V 5.0Ah Coolpack Professional**



BATTERY GBA 18V 6.0Ah Professional



BATTERIES







BATTERY 2 x GBA 18V 4.0Ah + GAL 18V-40 Professional





4	Ē	
6		

Technical data	
Part number	1 600 A01
Battery voltage	18 V
Weight (battery)	619 g
Weight (charger)	550 g
Comes complete with	9S1
complete with	
2 x battery GBA 18V 4.0Ah (1 600 Z00 038)	x
-	





T

Part number	1 600 A00
Battery voltage	18 V
Weight (battery)	600 g
Weight (charger)	700 g
Comes complete with	B8K
Comes complete with 2 x 5.0 Ah Li-Ion batteries (0600 A00 2U5)	B8K x
-	
2 x 5.0 Ah Li-Ion batteries (0600 A00 2U5)	x

BATTERIES

LI-ION

18V

BATTERY 1 x ProCORE18V 4.0Ah + GAL 18V-40 Professional



NEW!

21700

18 v

BATTERY 2 x ProCORE18V 4.0Ah + GAL 18V-40 Professional




Technical data	
Part number	1 600 A01
Battery voltage	18 V
Weight (battery)	515 g
Weight (charger)	550 g
Comes complete with	U7V
1 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)	x
Cardboard box	x
Quick charger GAL 18V-40 Professional (1 600 A01 9RK)	x

Technical data	
Part number	1 600 A01
Battery voltage	18 V
Weight (battery)	515 g
Weight (charger)	550 g
Comes complete with	BA4
2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)	x
Cardboard box	x
Quick charger GAL 18V-40 Professional (1 600 A01 9RK)	X

BATTERY 1 x ProCORE18V 4.0Ah + 1 x ProCORE18V 8.0Ah + GAL 1880 CV Professional





BATTERY 2 x ProCORE18V 5.5Ah + GAL 1880 CV Professional





BATTERY

2 x ProCORE18V 8.0Ah + GAL 18V-160 C + GCY 42 Professional



NEW!

16.0 A ₩ 26 8.0 15 18V 21700 Ah Tec ical data 1 600 A01

Battery voltage	18 V
Weight (battery)	955 g
Weight (charger)	950 g
Comes complete with	6GR
1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 6NH)	x
2 x battery ProCORE18V 8.0Ah (1 600 A01 6GK)	x
Cardboard box	х
Quick charger GAL 18V-160 C Professional (1 600 A01 9S7)	x

NEW!

e

BATTERIES, CHARGERS

36

BATTERY 2 x ProCORE18V 12.0Ah + GAL 18V-160 C + GCY 42 Professional



Technical data Part numbe

Weight

Battery charging voltage

Quick charger GAL 18V-40 Professional (1 600 A01 9RK)

Comes complete with

Cardboard box



1 600 A01

14,4 - 18 V

550 g

x

.. 9RK

1 600 A01
18 V
1,350 g
950 g
6GZ
x
х
x
x









CHARGERS

CHARGER

GAA 18V-24 Professiona	I
Technical data	
Part number	1 600 A00
Battery charging voltage	18 V
Weight	125 g
Comes complete with	J61
Battery adapter GAA 18V-24 (1 600 A00 J61)	х
Cardboard box	x

CHARGER GAL 1830 W Wireless Charging Professional



Part number	1 600 A00
Battery charging voltage	18 V
Weight	600 g
Comes complete with	4ZW
Cardboard box	х
Mounting frame for charger	x
Wireless charging charger GAL 1830 W (1 600 A00 4ZV)	Х

CHARGER

GAL 1830 W-DC Wireless Charging car charger Professional



CHARGER


Wireless Charging Ready-to-Go L-BOXX Bay Professional



CHARGER Wireless Charging 230V L-BOXX Bay Professional



CHARGER GAX 18V-30 Professional



DRILL DRIVERS

DRILL DRIVER			DRILL DRIVER		
GSR 18V-28 Profession	nal		GSR 18V-28 Professiona	d.	
			63/28		
			NM 1.5-13mm waterman		
Technical data Part number Battery voltage Torque (soft/hard/max.) No-load speed (1st gear / 2nd gear) Max. screw diameter Max. drilling diameter in wood Max. drilling diameter in steel Comes complete with Cardboard box	0 601 9H4 18 V 28/63/- Nm 0 - 500 / 0 - 1.900 rpm 8 mm 38 mm 13 mm 100 x		Technical data Part number Battery voltage Torque (soft/hard/max.) No-load speed (1st gear / 2nd gear) Max. screw diameter Max. drilling diameter in wood Max. drilling diameter in steel Comes complete with 2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) L-BOXX 136 (1 600 A01 2G0) L-BOXX i134 yfor tool and charger Quick charger AL 1860 CV (2 607 225 323)	0 601 9H4 18 V 28/63/- Nm 0 - 500 / 0 - 1.900 rpm 8 mm 38 mm 13 mm 171 x x x x x	
DRILL DRIVER GSR 18V-55 Profession	nal	NEW!	DRILL DRIVER GSR 18V-55 Professiona	1	NEW!
55/28 0'1750 0'1750 Image: Constraint of the second se	0 601 9H5 28/55/- Nm 0 - 460 / 0 - 1.800 rpm 10 mm 35 mm 13 mm	BRUSHLESS MOTOR	55/28 m Imm Part number Forque (soft/hard/max.) No-load speed (1st gear / 2nd gear) Max. screw diameter Max. drilling diameter in wood Max. drilling diameter in steel	0 601 9H5 28/55/- Nm 0 - 460 / 0 - 1.800 rpm 10 mm 35 mm 13 mm	RUSHLESS MOTOR
Comes complete with Cardboard box L-BOXX	202 203 X - - X	3	Comes complete with 2 x battery GBA 18V 2.0Ah (1 600 Z00 036) L-BOXX 136 (1 600 A01 2G0) Quick charger GAL 18V-40 Professional (1 600 A01 9RJ)	271 x x x x	

DRILL DRIVERS

DRILL DRIVER GSR 18V-60 C Profession	nal		DRILL DRIVER GSR 18V-60 C Professio	onal	NEW!
	Ţ	_		Ţ	
60/31 Nm					
Technical data			Technical data		
Part number	0 601 9G1		Part number	0 601 9G1	
Battery voltage	18 V		Battery voltage	18 V	
Torque (soft/hard/max.)	31/60/- Nm		Torque (soft/hard/max.)	31/60/- Nm	
No-load speed (1st gear / 2nd gear)	0 - 600 / 0 - 1.900 rp	m	No-load speed (1st gear / 2nd gear)	0 – 600 / 0 – 1.900 rpm	
Max. screw diameter	10 mm		Max. screw diameter	10 mm	
Max. drilling diameter in wood	38 mm		Max. drilling diameter in wood	38 mm	
Max. drilling diameter in steel	13 mm		Max. drilling diameter in steel	13 mm	
Comes complete with	102	103	Comes complete with	173	
1 x Bluetooth Low Energy module GCY 30-4 (1 600 A00 R26)	-	-	2 x battery ProCORE18V 4.0Ah (1 600 A01 6 L-BOXX 136 (1 600 A01 2G0)	GB) x x	
1/2 L-BOXX inlay for tool (1 600 A00 2WA)	х	-	Quick charger GAL 18V-40 Professional	x	
1/2 L-BOXX inlay for tool and charger (1 600 A00 2WA, 1 600 A00 2WC)	-	x	(1 600 A01 9RJ)		
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-			
Cardboard box	x	-			
L-BOXX 136 (1 600 A01 2G0)	-	x			
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-			

DRILL DRIVER
GSR 18V-60 FC Professional

dynamicseries	A		
		2	
			BRUSHLESS
Technical data			
Part number	0 601 9G7		
Battery voltage	18 V		
Torque (soft/hard/max.)	31/60/- Nm		
No-load speed (1st gear / 2nd gear)	0 - 600 / 0 -	1.900 rpm	
Max. screw diameter	10 mm		
Max. drilling diameter in wood	38 mm		
Max. drilling diameter in steel	13 mm		
Comes complete with	102	103	170
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	x
Angle adapter GFA 18-W Professional (1 600 A01 3P7)	-	x	x
Hammer adapter incl. auxiliary handle GFA 18-H Professional (1 600 A00 3NF)	-	x	x
L-BOXX 136 (1 600 A01 2G0)	x	x	x
L-BOXX inlay for tool	х	x	-
L-BOXX inlay for tool and charger	-	-	x
Metal chuck adapter GFA 18-M Professional (1 600 A01 3P6)	x	x	x
Off-set angle adapter GFA 18-E Professional (1 600 A00 1SJ)	-	x	x
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-	x

DRILL DRIVER GSR 18V-110 C Professi	onal		NEW!
Technical data	-		
Part number	0 601 9G0		
Battery voltage	18 V		
Torque (soft/hard/max.)	47/85/110 Nm		
No-load speed (1st gear / 2nd gear)	0 - 480 / 0 - 2.100 rp	om	
Max. screw diameter	12 mm		
Max. drilling diameter in wood	82 mm		
Max. drilling diameter in steel	13 mm		
Comes complete with	109	174	
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	х	
Auxiliary handle (1 602 025 07X)	х	х	
L-BOXX 136 (1 600 A01 2G0)	x	x	
Quick charger GAL 18V-40 Professional (1 600 A01 9RJ)	-	x	

IMPACT DRIVERS/WRENCHES

IMPACT DRIVER/WRENCH GDR 18V-160 Professional



Technical data		
Part number	0 601 9G5	
Torque, max.	160 Nm	
Screw diameter	M 6 – M 14	
No-load speed	0-2.800 rpm	
Impact rate	0-3.600 bpm	
Tool holder	1/4" internal hexag	on
Comes complete with	104	170
1/2 L-BOXX inlay for accessories (1 600 A00 2WC)	x	x
1/2 L-BOXX inlay for tool (1 600 A00 M7R)	х	Х
2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	-	х
Cardboard box	-	-
Charger AL 1820 CV (2 607 225 426)	-	x
L-BOXX 136 (1 600 A01 2G0)	х	x

IMPACT DRIVER GDR 18V-200 C Professional

2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB) -

Quick charger GAL 1880 CV (1 600 A00 B8H)

Cardboard box

L-BOXX 136 (1 600 A01 2G0)



х

х

х

x

х

х

IMPACT WRENCH GDS 18V-200 C Professio	nal		NEW!
Nm bpm min*/rpm 1/2* Technical data			MOTOR
Part number	0.601.9G4		
Torque, max.	200 Nm		
Screw diameter	M 6 - M 16		
No-load speed	0-3.400 rpm		
No-load speed (1st level)	0-1.100 rpm		
Impact rate	0-4.200 bpm		
Tool holder	1/2" external so	uare friction rin	g + through hole
Comes complete with	301	302	370
1 x Bluetooth Low Energy module GCY 30-4 (1 600 A00 R26)	-	-	x
1/2 L-BOXX inlay for tool and charger (1 600 A01 CU5)	x	x	x
2 x battery ProCORE18V 4.0Ah (1 600 A01 6GC)	-	-	x
Cardboard box	-	x	-
L-BOXX 136 (1 600 A01 2G0)	x	-	х
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-	х



IMPACT DRIVERS/WRENCHES, DRYWALL SCREWDRIVERS

IMPACT DRIVER/WF GDX 18V-180 Profes		IMPACT DRIVER/WRENC GDX 18V-200 C Professio			
0 0 0 0 0 0 0 0 0 0 0 0 0 0					
Technical data	-	Technical data	_		
Part number	0 601 9G5	Part number	0 601 9G4		
Battery voltage	18 V	Torque, max.	200 Nm		
Torque, max.	180 Nm	Screw diameter	M 6 - M 16	ŝ	
No-load speed	0-2,800 rpm	No-load speed	0-3.400 rp	m	
Impact rate	0-3,600 bpm	No-load speed (1st level)	0-1.100 rp	m	
Tool holder	1/4" internal hexagon and 1/2" external square	Impact rate	0-4.000 bp	um	
Comes complete with	202	Tool holder	1/4" intern	al hexagon ;	and 1/2" exte
L-BOXX 136 (1 600 A01 2G0)	х	Comes complete with	202	204	270
		1/2 L-BOXX inlay for accessories (1 600 A00 2WC)	х	-	х
		1/2 L-BOXX inlay for tool and charger (1 600 A01 CU5)	x	x	x
		2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	-
		2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)	-	-	х
		Cardboard box	-	х	-
		L-BOXX 136 (1 600 A01 2G0)	х	-	х
		Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-	x

DRYWALL SCREWDRIVER MA55 Professional



Part number	1 600 Z00
Comes complete with	00Y
1 x screwdriver bit PH 2	x
Cardboard box	x

DRYWALL SCREWDRIVER GSR 18V-EC TE Professional

		BRUSHLESS MOTOR
Technical data		
Part number	0 601 9C8	
Battery voltage	18 V	
Torque, max. (hard/soft)	25 / 5 Nm	
No-load speed	0 – 4.200 rpm	
Max. screw diameter	4.2 mm	
Comes complete with	004	
1 x screwdriver bit PH 2	x	
1/1 LBOXX inlay for tool (1 600 A00 2WR)	x	
Depth stop (2 600 460 058)	x	
L-BOXX 136 (1 600 A01 2G0)	x	
Magnetic universal holder (2 607 002 584)	x	

ernal square ...271

COMBI DRILLS



COMBI DRILL GSB 18V-28 Professional



63/28 Nm	4 1.5-13mm	9
-------------	----------------------	---

Technical data	
Part number	0 601 9H4
Battery voltage	18 V
Torque (soft/hard/max.)	28/63/- Nm
No-load speed (1st gear / 2nd gear)	0 – 500 / 0 – 1.900 rpm
Max. screw diameter	8 mm
Max. drilling diameter in wood	38 mm
Max. drilling diameter in masonry	13 mm
Max. drilling diameter in steel	13 mm
Comes complete with	071
complete with	0/1
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	x
-	
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) L-BOXX 136 (1 600 A01 2G0)	x x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) L-BOXX 136 (1 600 A01 2G0) L-BOXX inlay for tool and charger	x x x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) L-BOXX 136 (1 600 A01 2G0) L-BOXX inlay for tool and charger	x x x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) L-BOXX 136 (1 600 A01 2G0) L-BOXX inlay for tool and charger	x x x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) L-BOXX 136 (1 600 A01 2G0) L-BOXX inlay for tool and charger	x x x



COMBI DRILLS

COMBI DRILL GSB 18V-55 Professional				NEW!
55/28 Mm				
Technical data				
Part number	0 601 9H5			
Torque (soft/hard/max.)	28/55/- Nm			
No-load speed (1st gear / 2nd gear)		– 1.800 rpm		
Max. screw diameter	10 mm			
Max. drilling diameter in wood	35 mm			
Max. drilling diameter in masonry	13 mm			
Max. drilling diameter in steel	13 mm			
Comes complete with	302	303	370	372
2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	-	-	х	-
2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)	-	-	-	x
L-BOXX 136 (1 600 A01 2G0)	-	-	х	х
Quick charger GAL 18V-40 Professional (1 600 A01 9RJ)	-	-	x	x

COMBI DRILL GSB 18V-60 C Professional



COMBI DRILL GSB 18V-60 C Profession	al		NEW!
60/31 Nm Que Contractor			REUSHLISS MOTOR
Technical data			
Part number	0 601 9G2		
Battery voltage Torque (soft/hard/max.)	18 V 31/60/- Nm		
No-load speed (1st gear / 2nd gear)	0 - 600 / 0 - 1.900 rpm		
Max. screw diameter	10 mm		
Max. drilling diameter in wood	38 mm		
Max. drilling diameter in masonry	13 mm		
Max. drilling diameter in steel	13 mm		
Comes complete with	175	177	
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	х	-	
2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)	-	x	
L-BOXX 136 (1 600 A01 2G0)	х	х	
Quick charger GAL 18V-40 Professional (1 600 A01 9RJ)	х	x	

COMBI DRILL

COMBI DRILLS, ROTARY HAMMERS



Battery voltage	18 V			
Torque (soft/hard/max.)	47/85/110	Nm		
No-load speed (1st gear / 2nd gear)	0 - 480 / 0	– 2.100 rpm		
Max. screw diameter	12 mm			
Max. drilling diameter in wood	82 mm			
Max. drilling diameter in masonry	16 mm			
Max. drilling diameter in steel	13 mm			
Comes complete with	30A	309	375	376
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	х	-
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) 2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)	-	-	x -	- x
	- - X	- - X	x - x	- x x
2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)		- - x x	-	
2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB) Auxiliary handle (1 602 025 07X)	x		-	



ROTARY HAMMER GBH 18 V-LI Compact Professional



Technical data	
Part number	0 611 905
Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 12 mm
Max. drilling diameter in metal	8 mm
Max. drilling diameter in wood	16 mm
Max. impact energy	1 J
Rated speed	0 – 1.050 rpm
Impact rate at rated speed	0 – 4.950 bpm
Tool holder	SDS plus
Comes complete with	300
Cardboard box	x
Machine cloth	x

ROTARY HAMMER GBH 18 V-LI Compact Professional



Part number	0 611 905
Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 12 mm
Max. drilling diameter in metal	8 mm
Max. drilling diameter in wood	16 mm
Max. impact energy	1 J
Rated speed	0 – 1.050 rpm
Impact rate at rated speed	0 – 4.950 bpm
Tool holder	SDS plus
Comes complete with	304
1/1 L-BOXX inlay for tool (1 600 A00 2VL)	x
L-BOXX 136 (1 600 A01 2G0)	x

ROTARY HAMMERS

ROTARY HAMMER

GBH 18 V-LI Compact Professional



COOLPACK LINENAL	•
Technical data	
Part number	0 611 905
Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 12 mm
Max. drilling diameter in metal	8 mm
Max. drilling diameter in wood	16 mm
Max. impact energy	1 J
Rated speed	0 – 1.050 rpm
Impact rate at rated speed	0 – 4.950 bpm
Tool holder	SDS plus
Comes complete with	374
1/1 L-BOXX inlay for tool (1 600 A00 2VL)	x
2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	x
Charger AL 1820 CV (2 607 225 426)	x
L-BOXX 136 (1 600 A01 2G0)	x

ROTARY HAMMER

GBH 18 V-20 Professional



Technical data			
Part number	0 611 911		
Battery voltage	18 V		
Drilling dia. in concrete with hammer drill bits	4-20mm		
Max. drilling diameter in metal	13 mm		
Max. drilling diameter in wood	30 mm		
Max. impact energy	1.7 J		
Rated speed	0-1800 rpm		
Impact rate at rated speed	0-24550 bpm		
Tool holder	SDS plus		
Comes complete with	073	000	001
2 x 5.0 Ah Li-Ion batteries	х	-	-
AL1860 CV Charger	х	-	-
Depth stop	х	х	-
Machine cloth	х	х	-
L-BOXX	х	-	х
Cardboard box	-	х	-
Cardboard box	-	X	-

ROTARY HAMMER GBH 18V-21 Professional



Technical data				
Part number	0 611 911			
Battery voltage	18 V	18 V		
Max. impact energy	2 J	2 J		
Impact rate at rated speed	0 – 5.100 b	0 – 5.100 bpm		
Rated speed	0 – 1.800 r	0 – 1.800 rpm		
Weight excl. battery	2,3 (2,4) k	2,3 (2,4) kg		
Tool holder	SDS plus	SDS plus		
Drilling dia. in concrete with hammer drill bits	4 – 20 mm			
Opt. app. range in concrete with hammer drill bits	6 – 10 mm	6 – 10 mm		
Max. drilling diameter in metal	13 mm	13 mm		
Max. drilling diameter in wood	30 (13) mn	30 (13) mm		
Sound pressure level	90 dB(A)	90 dB(A)		
Sound power level 101 dB(A)	Uncertainty	Uncertainty K= 3 dB		
Comes complete with	100	101	172	
Depth stop (spare part number 1 613 001 009)	x	x	x	
Machine cloth (spare part number 1 619 200 413)	x	x	x	
Cardboard box	x	-	-	
L-BOXX 136 (1 600 A00 1RR)	-	x	-	
Auxiliary handle (1 602 025 08X)	-	-	x	

ROTARY HAMMER GBH 18 V-EC Professional

	T	
Technical data		
Part number	0 611 904	
Battery voltage	18 V	
Drilling dia. in concrete with hammer drill bits	4 - 18 mm 13 mm	
Max. drilling diameter in metal	13 mm 20 mm	
Max. drilling diameter in wood	20 mm 1.7 J	
Max. impact energy Rated speed	1.7 J 0 – 1.400 rpm	
Impact rate at rated speed	0 – 1.400 rpm 0 – 4.550 bpm	
Tool holder	SDS plus	
Comes complete with	000	
Auxiliary handle (2 602 025 141)	x	
Cardboard box	x	
Depth stop 210 mm (1 613 001 010)	x	
Machine cloth	x	

ROTARY HAMMERS

ROTARY HAMMER GBH 18 V-EC Professional



Part number	0 611 904	
Battery voltage	18 V	
Drilling dia. in concrete with hammer drill bits	4 – 18 mm	
Max. drilling diameter in metal	13 mm	
Max. drilling diameter in wood	20 mm	
Max. impact energy	1.7 J	
Rated speed	0 – 1.400 rpm	
Impact rate at rated speed	0 – 4.550 bpm	
Tool holder	SDS plus	
Comes complete with	077	078
1/1 L-BOXX inlay for tool and charger (1 600 A00 2WF)	x	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	x	-
Auxiliary handle (2 602 025 141)	x	х
Depth stop 210 mm (1 613 001 010)	х	х
L-BOXX 136 (1 600 A01 2G0)	x	x
Machine cloth	x	x
Machine cloth Quick charger GAL 1880 CV (1 600 A00 B8G)	x x	x x

ROTARY HAMMER GBH 18 V-EC Professional



Part number	0 611 904
Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 18 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	20 mm
Max. impact energy	1.7 J
Rated speed	0 – 1.400 rpm
Impact rate at rated speed	0 – 4.550 bpm
Tool holder	SDS plus
Comes complete with	003
Auxiliary handle (2 602 025 141)	х
Depth stop 210 mm (1 613 001 010)	х
L-BOXX 136 (1 600 A01 2G0)	х

ROTARY HAMMER GBH 18V-26 Professional

Image: Constraint of the second sec	Ţ	
Part number	0 611 909	
Battery voltage	18 V	
Drilling dia. in concrete with hammer drill bits	4 – 26 mm	
Max. drilling diameter in metal	13 mm	
Max. drilling diameter in wood	30 mm	
Max. impact energy	2.6 J	
Rated speed	0 – 980 rpm	
Impact rate at rated speed	0 – 4.350 bpm	
Tool holder	SDS plus	
Comes complete with	000	001
1/1 L-BOXX inlay for tool (1 600 A00 HP1)	-	х
Auxiliary handle (2 602 025 141)	х	х
Cardboard box	х	-
Depth stop 210 mm (1 613 001 010)	х	х
L-BOXX 136 (1 600 A01 2G0)	-	х
Machine cloth	x	X

MOTOR

ROTARY HAMMERS

ROTARY HAMMER

GBH 18V-26 F Professional



Technical data				
Part number	0 611 910 .			
Battery voltage	18 V			
Drilling dia. in concrete with hammer drill bits	4 – 26 mm			
Max. drilling diameter in metal	13 mm			
Max. drilling diameter in wood	30 mm			
Max. impact energy	2.6 J			
Rated speed	0 – 980 rpn	n		
Impact rate at rated speed	0 - 4.350 b	pm		
Tool holder	SDS plus			
Comes complete with	000	072	074	078
1 x battery ProCORE18V 8.0Ah (1 607 A35 0CG)	-	-	-	x
1/1 L-BOXX inlay for tool (1 600 A00 HP1)	-	х	-	x
1/1 L-BOXX inlay for tool and GDE 18V-16 (1 600 A00 HP2)	-	=	x	-
2 x battery GBA 18V 6.0Ah (1 600 A00 4ZN)	-	x	х	-
Auxiliary handle (2 602 025 141)	х	х	х	х
Cardboard box	х	-	-	-
Depth stop 210 mm (1 613 001 010)	х	х	х	x
Dust extraction system GDE 18V-16 Professional (1 600 A00 51M)	-	-	x	-
L-BOXX 136 (1 600 A01 2G0)	-	x	-	x
L-BOXX 238 (1 600 A01 2G2)	-	-	х	-
Machine cloth	х	x	х	-
Quick change chuck 13 mm (2 608 572 212)	х	х	х	x
Quick charger GAL 1880 CV (1 600 A00 B8G)	-	х	х	-
Quick charger GAL 18V-160 C Professional (1 600 A01 9S7)	-	-	-	x
SDS plus quick-change chuck (2 608 572 213)	x	x	x	х

ROTARY HAMMER GBH 18V-26 D Professio	nal	1	NEW
Technical data Part number	0.611.916		
Battery voltage	18 V		
Drilling dia. in concrete with hammer drill bits	4 – 26 mm		
Max. drilling diameter in metal	13 mm		
Max. drilling diameter in wood	30 mm		
Max. impact energy	2.5 J		
Rated speed	0 – 980 rpm		
Impact rate at rated speed	0 – 4.350 bpm		
Tool holder	SDS plus		
Comes complete with	000	001	
Auxiliary handle (2 602 025 141)	х	x	
Cardboard box	-	x	
		-	
Carrying case	x		
	x x	x	

ROTARY HAMMER GBH 18V-45 C Profession	al	NEW!
Image: Second system Image: Second system	F	KICKBACK
Technical data		
Part number	0 611 913	
Drilling dia. in concrete with hammer drill bits	12 - 45 mm	
Max. impact energy	12.5 J	
Rated speed	0 – 305 rpm	
Impact rate at rated speed	0 – 2.760 bpm	
Tool holder	SDS max	
Comes complete with	000	
1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 6NH)	x	
Auxiliary handle (1 607 031 2E7)	x	
Carrying case (spare part number 1 615 438 51A)	x	
Grease tube (spare part number 1 615 430 010)	х	
Machine cloth (spare part number 1 619 200 413)	x	

ROTARY HAMMER, ORBITAL SANDER, MULTI-CUTTER AND MULTI ROTARY TOOL

KICKBAC

ORBITAL SANDER

1 x sanding sheet C470, Best for Wood + Paint, -120 (available separately as set of 10: 2 608 608 Z96)

Base plate, 113 x 101 mm (2 608 601 446) with x sanding plate (2 608 601 443)

Base plate, 80 x 130 mm (2 608 601 447) with -sanding plate (2 608 601 444)

Delta base plate, 100 x 150 mm (2 608 601 448) -with sanding plate (2 608 601 445)

Quick charger AL 1860 CV (2 607 225 324)

2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)

Cardboard box

L-BOXX inlay

Screwdriver

Microfilter box

Sanding paper G120

Hole punch (2 608 190 059)

L-BOXX 136 (1 600 A01 2G0)



Technical data	
Part number	0 611 913
Drilling dia. in concrete with hammer drill bits	12 - 45 mm
Max. impact energy	12.5 J
Rated speed	0 – 305 rpm
Impact rate at rated speed	0 – 2.760 bpm
Tool holder	SDS max
Comes complete with	072
1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 6NH)	x
2 x battery ProCORE18V 12.0Ah (1 600 A01 6GU)	X
Auxiliary handle (1 607 031 2E7)	х
Carrying case (spare part number 1 615 438 51A)	X
Grease tube (spare part number 1 615 430 010)	х
Machine cloth (spare part number 1 619 200 413)	X
Quick charger GAL 18V-160 C Professional (1 600 A01 9S7)	x

Technical data			
Part number	0 601 9D0		
Battery voltage	18 V		
No-load orbital stroke rate	11.000 - 22.00	00 opm	
	1.6 mm		
Orbit diameter			
Sanding plate, width	113 mm		
Sanding plate, width Sanding plate, length	113 mm 101 mm		
Sanding plate, width Sanding plate, length Comes complete with	113 mm 101 mm 200	202	270
Sanding plate, width Sanding plate, length	113 mm 101 mm	 202 ×	270 x

х

х

x

x

х

х

х

х

_

x

х

_

х

х

х

х

х

x

х

х

x

х

х

x

MULTI-CUTTER GOP 18V-28 Professional



0 601 8B6	
18 V	
8.000 - 20.000 opm	
1.4 °	
001	002
x	x
-	х
x	-
	18 V 8.000 – 20.000 opm 1.4 ° 001 x

MULTI-CUTTERS AND MULTI ROTARY TOOLS, JIGSAWS

MULTI-CUTTER

GOP 18V-28 Professional



	ĥ	Ŵ
Teehn	ioni da	*~

Technical data	
Part number	0 601 8B6
Battery voltage	18 V
No-load rotation	8.000 – 20.000 opm
Oscillation angle on left and right	1.4 °
Comes complete with	071
1 x Starlock BIM plunge cut saw blade All 65 APB, Curved-Tec, Wood + Metal (2 608 661 781)	x
1 x Starlock BIM plunge cut saw blade All 65 BSPB, Curved-Tec, Hard Wood (2 608 662 017)	X
1 x Starlock BIM plunge cut saw blade AIZ 20 AB, Wood + Metal (2 608 661 640)	X
1 x Starlock BIM plunge cut saw blade AIZ 32 APB, Wood + Metal, Curved-Tec (2 608 661 644)	x
1 x Starlock BIM segment saw blade ACZ 85 EB, Wood + Metal (2 608 661 636)	x
1 x Starlock Carbide-RIFF sanding plate AVZ 78 RT2, Grout + Abrasive (2 608 661 648)	x
1 x Starlock Carbide-RIFF segment saw blade ACZ 85 RT3, Grout + Abrasive (2 608 661 642)	X
1 x Starlock delta sanding plate AVZ 93 G (2 608 000 493)	x
1 x StarlockPlus BIM plunge cut saw blade PAII 65 APB, Curved-Tec, Wood + Metal (2 608 662 564)	x
1 x StarlockPlus BIM plunge cut saw blade PAIZ 32 APB, Curved-Tec, Wood + Metal (2 608 662 558)	x
1 x StarlockPlus Carbide plunge cut saw blade PAIZ 32 AT, Metal (2 608 662 555)	x
2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	-
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	x
5 x sanding sheets, K 2x80, 2x120, 1x240 (2 608 621 104)	x
L-BOXX 136 (1 600 A01 2G0)	x
Quick charger AL 1860 CV (2 607 225 324)	x

JIGSAW GST 18 V-LI B Professional



Technical data		
Part number	0 601 5A6	
Battery voltage	18 V	
Stroke rate at no load	0 – 2.700 spm	
Cutting depth in wood	120 mm	
Mitre cuts	0-45 °	
Comes complete with	100	101
1 x jigsaw blade T 144 DP, Precision for Wood (available separately as set of 3: 2 608 633 A31)	х	х
1 x jigsaw blade T 244 D, Speed for Wood (available separately as set of 3: 2 608 630 879)	x	x
1 x jigsaw blade T 308 B, Extraclean for Hard Wood (Part number for 3-piece set 2 608 663 750)	-	-
1 x jigsaw blade T 308 B, Extra-clean for Wood (available separately as set of 3: 2 608 663 750)	x	x
1/1 L-BOXX inlay for tool and charger (1 600 A00 3NH)	x	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-
Cardboard box	x	-
Hood (2 601 016 096)	х	x
L-BOXX 136 (1 600 A01 2G0)	-	x
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-

JIGSAW GST 18 V-LI S Professional



Technical data		
Part number	0 601 5A5	
Battery voltage	18 V	
Stroke rate at no load	550 - 2.700 spm	
Cutting depth in wood	120 mm	
Comes complete with	100	101
1 x jigsaw blade T 144 DP, Precision for Wood (available separately as set of 3: 2 608 633 A31)	х	x
1 x jigsaw blade T 244 D, Speed for Wood (available separately as set of 3: 2 608 630 879)	x	x
1 x jigsaw blade T 308 B, Extraclean for Hard Wood (Part number for 3-piece set 2 608 663 750)	-	-
1 x jigsaw blade T 308 B, Extra-clean for Wood (available separately as set of 3: 2 608 663 750)	x	x
1/1 LBOXX inlay for tool and charger (1 600 A00 3NH)	x	х
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-
Cardboard box	х	-
Hood (2 601 016 096)	х	х
L-BOXX 136 (1 600 A01 2G0)	-	х
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-

RECIPROCATING SAWS AND BAND SAWS







Technical data	
Part number	0 601 64J
Battery voltage	18 V
Stroke lengths	28 mm
Comes complete with	077
1 x reciprocating saw blade S 123 XF, Progressor for Metal (available separately as set of 2: 2 608 654 416)	x
1 x reciprocating saw blade S 2345 X, Progressor for Wood (available separately as set of 2: 2 608 654 403)	x
1/1 L-BOXX inlay for tool and charger (1 600 A00 2UZ, 1 600 A00 2VF)	X
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	x
L-BOXX 238 (1 600 A01 2G2)	x
Quick charger GAL 1880 CV (1 600 A00 B8H)	x

RECIPROCATING SAW GSA 18 V-LI Professional



Technical data		
Part number	0.601.64J	
Battery voltage	18 V	
Stroke lengths	28 mm	
Comes complete with	007	077
1 x reciprocating saw blade S 123 XF, Progressor for Metal (available separately as set of 2: 2 608 654 416)	x	-
1 x reciprocating saw blade S 2345 X, Progressor for Wood (available separately as set of 2: 2 608 654 403)	x	-
1/1 L-BOXX inlay for tool and charger (1 600 A00 2UZ, 1 600 A00 2VF)	x	-
L-BOXX 238 (1 600 A01 2G2)	x	-
Cardboard box	-	x

RECIPROCATING SAW GSA 18 V-LI C Professional



Technical data	
Part number	0 601 6A5
Battery voltage	18 V
Stroke lengths	21 mm
Comes complete with	001
1 x reciprocating saw blade S 922 AF, Flexible for Metal (available separately as set of 2: 2 608 656 036)	x
1 x reciprocating saw blade S 922 EF, Flexible for Metal (available separately as set of 2: 2 608 656 038)	x
1 x reciprocating saw blade S 922 HF, Flexible for Wood + Metal (available separately as set of 2: 2 608 656 039)	x
Inlay for L-BOXX 136	x
L-BOXX 136 (1 600 A01 2G0)	x

MOTOR

RECIPROCATING SAW, HAND-HELD CIRCULAR SAWS

RECIPROCATING SAW GSA 18V-32 Professional

Technical data			
Part number	0 601 6A8		
Battery voltage	18 V		
Stroke lengths	32 mm		
Comes complete with	108	109	172
1 x reciprocating saw blade S 1110 VF, Heavy for Wood + Metal (available separately as set of 5: 2 608 657 610)	х	-	-
1 x reciprocating saw blade S 1130 CF, Endurance for Heavy Metal (available separately as set of 5: 2 608 657 528)	-	х	x
1 x reciprocating saw blade S 1156 XHM, Progressor for Wood + Metal (2 608 653 100)	-	-	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	х
Cardboard box	х	-	-
Carrying case	-	х	х
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-	х
Saw blade box	-	-	х

HAND-HELD CIRCULAR SAW GKS 18V-57 Professional






Technical data	
Part number	0 601 6A2
Battery voltage	18 V
No-load speed	3.400 rpm
Max. cutting capacity in wood (90°)	57 mm
Max. cutting capacity in wood (45°)	39 mm
Saw blade diameter	165 mm
Saw blade bore diameter	20 mm
Comes complete with	200
Cardboard box	x
Dust extraction adapter	x
Internal hexagon	x
Parallel guide	x
Saw blade	х

HAND-HELD CIRCULAR SAW GKS 18V-57 G Professional



HAND-HELD CIRCULAR SAW NEW! **GKS 18V-68 C Professional** 5000 9 BITURBO MOTOR BRUSHLESS Technical data 0 601 6B5 No-load speed 5.000 rpm Max. cutting capacity in wood (90°) 70 mm Max. cutting capacity in wood (45°) 49.5 mm Saw blade diameter 190 mm Saw blade bore diameter 30 mm Comes complete with .. 001 1 x circular saw blade, Standard for Woo 190 x 30 x 1.6 mm (2 608 837 708) 1/1 L-BOXX inlay for tool (1 600 A01 S9X) х L-BOXX 238 (1 600 A01 2G2) х Parallel guide (1 608 190 007) х

HAND-HELD CIRCULAR SAWS

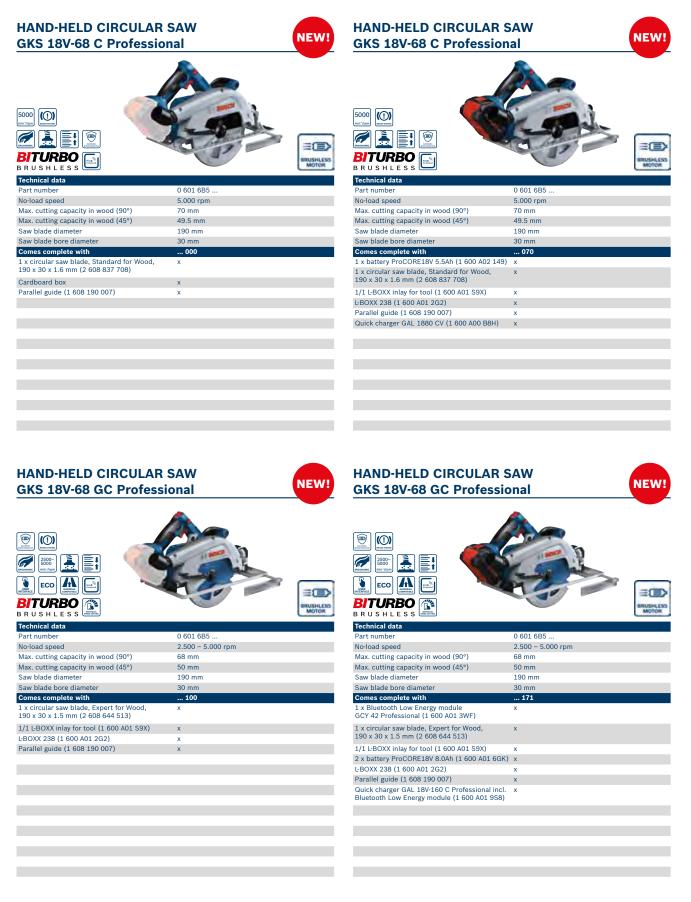

HAND-HELD CIRCULAR SAW, PLUNGE SAW, SLIDING MITRE SAW, **ANGLE GRINDER**

HAND-HELD CIRCULAR SAW **GKS 18V-68 GC Professional**



MOTOR

NEW!

Eco 🔬 🔜 BITURBO 👔 BRUSHLESS

Part number	0 601 6B5
No-load speed	2.500 - 5.000 rpm
Max. cutting capacity in wood (90°)	68 mm
Max. cutting capacity in wood (45°)	50 mm
Saw blade diameter	190 mm
Saw blade bore diameter	30 mm
Comes complete with	170
1 x circular saw blade, Expert for Wood, 190 x 30 x 1.5 mm (2 608 644 513)	x
1/1 L-BOXX inlay for tool (1 600 A01 S9X)	x
2 x battery ProCORE18V 5.5Ah (1 600 A02 149)	x
L-BOXX 238 (1 600 A01 2G2)	x
	x
Parallel guide (1 608 190 007)	
Parallel guide (1 608 190 007) Quick charger GAL 1880 CV (1 600 A00 B8H)	x

PLUNGE SAW GKT 18V-52 GC Professio	onal	NEW
Technical data		
Part number	See table below	
No-load speed, from	2,800 rpm	
Weight excl. battery	4.1 kg	
Saw blade bore diameter	20 mm	
Saw blade diameter	140 mm	
Baseplate	305 x 169 mm	
Tool dimensions (width x length x height)	209 x 374 x 234 mm	
Comes complete with	0 601 6B4 000	0 615 990 L54
1 x circular saw blade, Expert for Wood for cordless saws, 140 x 1.8/1.3 x 20 mm, 42 (2 608 644 500)	x	x
1 x guide rail FSN 1600 (1 600 Z00 00F)	-	x
2 x battery ProCORE18V 8.0Ah (1 600 A01 6GK)	-	x
Dust bag (2 608 000 696)	х	x
Hex key	x	x
L-BOXX 238 (1 600 A01 2G2)	х	x
Quick charger GAL 18V-160 C Professional	-	x

SLIDING MITRE SAW GCM 18V-216 Professional



ANGLE GRINDER **GWS 18-125 V-LI Professional**

Technical data Valuation of the spanner (1607 950 043) Part number 0 601 934 Battery voltage 18 V No-load speed 10.000 rpm Gomes complete with 307 308 377 Other colspanse - x x x Comes complete with 307 308 377 Other colspanse - x x x (1 600 A00 2WH) - - x x 2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x x Backing flange (spare part number - x x x 2 605 703 014) x x x x x Cardboard box x - - x x LeGOX 136 (1 600 A01 2G0) - x x x Cardboard box x x x x Locking nut (1 613 906 548) x x x				
Battery voltage 18 V No-load speed 10.000 rpm Grinding/cutting disc, diameter 125 mm Comes complete with 307 308 377 1/1 LBOXX inlay for tool and charger - x x 1/1 LBOXX inlay for tool and charger - x x 2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x Backing flange (spare part number - x x 2 605 703 014) x x - Cardboard box x - - LBOXX 136 (1 600 A01 2G0) - x x Lacking flange (spare part number - x - Cardboard box x - - - LBOXX 136 (1 600 A01 2G0) - x - - Protective guard (1 619 P06 548) x x x - Wo-hole spanner (1 607 950 043) - - x - Two-hole spanner (spare part number - x - -<	Technical data	0.001.024		
No-load speed 10.000 rpm Grinding/cutting disc, diameter 125 mm Comes complete with 307 308 377 J1 LBOXX inlay for tool and charger - x x J1 GOX 2002 WH) - - x J2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x J2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x J2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x J2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x J2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x J2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x J2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - - Z 605 703 014) x x x - Cardboard box x - - - LBOXX 136 (1 600 A01 2G0) - x - - Protective guard (1 619 P06 548) x x x -				
Grinding/cutting disc, diameter 125 mm Comes complete with 307 308 377 1/1 LBOXX inlay for tool and charger - x x 16 00 A00 2WH) - - x 2 battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x Auxiliary handle (1 602 025 024) x x x Backing flange (spare part number - x - 2 605 703 014) x x - Cardboard box x - - LbOXX 136 (1 600 A01 2G0) - x x Locking nut (1 603 340 040) - x - Protective guard (1 619 P06 548) x x x Quick charger GAL 1880 CV (1 600 A00 B8G) - - x Two-hole spanner (1 607 950 043) - x - Two-hole spanner (spare part number - x -				
Comes complete with 307 308 377 1/1 LBOXX inlay for tool and charger - x x 1/1 LBOXX inlay for tool and charger - x x 2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x 2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x Auxiliary handle (1 602 025 024) x x x Backing flange (spare part number - x - 2 605 703 014) x - - Cardboard box x - - LboXX 136 (1 600 A01 2G0) - x x Locking nut (1 603 340 040) - x - Protective guard (1 619 P06 548) x x x Quick charger GAL 1880 CV (1 600 A00 B8G) - - x Two-hole spanner (1 607 950 043) - x -				
1/1 LBOXX inlay for tool and charger - x x 1 (1 600 A00 2WH) - - x 2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) - - x Auxiliary handle (1 602 025 024) x x x Backing flange (spare part number - x - 2 605 703 014) x x - Cardboard box x - - LBOXX 136 (1 600 A01 2G0) - x x LBOXX 136 (1 600 A01 2G0) - x x Locking nut (1 603 340 040) - x - Protective guard (1 619 P06 548) x x x Quick charger GAL 1880 CV (1 600 A00 B8G) - - x Two-hole spanner (1 607 950 043) - x -			200	077
(1 600 A00 2WH) 2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) x Auxiliary handle (1 602 025 024) x x x x Auxiliary handle (1 602 025 024) x	-	307		
Auxiliary handle (1 602 025 024) x x x Backing flange (spare part number - x - 2 605 703 014) - x - Cardboard box x - - LBOXX 136 (1 600 A01 2G0) - x x Locking nut (1 603 340 040) - x - Protective guard (1 619 P06 548) x x x Quick charger GAL 1880 CV (1 600 A00 B8G) - - x Two-hole spanner (1 607 950 043) - x - Two-hole spanner (spare part number - x -		-	x	x
Backing flange (spare part number - x - 2 605 703 014) x - - Cardboard box x - - Leb0XX 136 (1 600 A01 260) - x x Locking nut (1 603 340 040) - x - Protective guard (1 619 P06 548) x x x Quick charger GAL 1880 CV (1 600 A00 B8G) - - x Two-hole spanner (1 607 950 043) - x - Two-hole spanner (spare part number - x -	2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	х
2 605 703 014) Cardboard box x LBOXX 136 (1 600 A01 2G0) - x x LBOXX 136 (1 600 A01 2G0) - x - Decking nut (1 603 340 040) - x - Protective guard (1 619 P06 548) x x x x Quick charger GAL 1880 CV (1 600 A00 B8G) x Two-hole spanner (1 607 950 043) - x - Two-hole spanner (spare part number - x -	Auxiliary handle (1 602 025 024)	x	x	x
L-BOXX 136 (1 600 A01 2G0) - x x Locking nut (1 603 340 040) - x - Protective guard (1 619 P06 548) x x x Quick charger GAL 1880 CV (1 600 A00 B8G) - - x Wro-hole spanner (1 607 950 043) - x - Two-hole spanner (spare part number - x -		-	x	-
Locking nut (1 603 340 040) – x – Protective guard (1 619 P06 548) x x x Quick charger GAL 1880 CV (1 600 A00 B8G) – – x Two-hole spanner (1 607 950 043) – x – Two-hole spanner (spare part number – x –	Cardboard box	x	-	-
Protective guard (1 619 P06 548) x x x Quick charger GAL 1880 CV (1 600 A00 B8G) - - x Two-hole spanner (1 607 950 043) - x - Two-hole spanner (spare part number - x -	-BOXX 136 (1 600 A01 2G0)	-	x	x
Quick charger GAL 1880 CV (1 600 A00 B8G) - - x Two-hole spanner (1 607 950 043) - x - Two-hole spanner (spare part number - x -	Locking nut (1 603 340 040)	-	x	-
Two-hole spanner (1 607 950 043) - x - Two-hole spanner (spare part number - x -	Protective guard (1 619 P06 548)	x	x	x
Two-hole spanner (spare part number - x -	Quick charger GAL 1880 CV (1 600 A00 B8G)	-	-	x
	Euro holo coopoor (1.607.0E0.042)	-	x	-
	(wo-noie spanner (± 007 550 045)			

90

ANGLE GRINDERS

ANGLE GRINDER	
GWS 18V-7 Professional	



Part number	0 601 9H9		
Battery voltage	18 V		
No-load speed	11,000 rpm		
Grinding/cutting disc, diameter	115 mm		
Bore size, diameter	22.2 mm		
Grinding spindle thread	M14		
Comes complete with	003	004	
Backing flange (1 605 703 099)	х	х	
Locking nut (1 603 340 040)	x	х	
Two-hole spanner (1 607 950 043)	x	х	
Protective guard (2 608 000 677)	x	х	
Auxiliary handle (1 602 025 024)	x	х	
Cardboard box	x	-	
L-BOXX 136 (1 600 A00 1RR)	-	х	
		x	



ANGLE GRINDER GWS 18V-10 Professional

 1000 Weinstein

 Image: Constraint of the state of t



NEW!

MOTOR

Part number	0 601 9J4.		
No-load speed	9.000 rpm		
Comes complete with	000	001	075
1/1 L-BOXX inlay for tool and charger (1 600 A01 166)	-	x	x
Backing flange (spare part number 2 605 703 014)	x	x	x
Cardboard box	x	-	х
L-BOXX 136 (1 600 A01 2G0)	-	x	х
Protective guard (1 605 510 364)	x	-	x
Quick-locking nut (2 608 000 684)	x	x	х
2x 4.0Ah, GAL 18 V-40	-	-	x

ANGLE GRINDER GWS 18V-10 C Professional

ANGLE GRINDER

	CONTROL OF STATE
Technical data Part number	0.001.000
	0 601 9G3 18 V
Battery voltage No-load speed	18 V 9.000 rpm
Grinding/cutting disc, diameter	115 mm
Bore size, diameter	22.2 mm
Grinding spindle thread	M 14
Comes complete with	20A
Backing flange (spare part number 2 605 703 014)	x
Cardboard box	Х
	x
Protective guard (1 605 510 364)	~
Protective guard (1 605 510 364) Quick-locking nut (2 608 000 684)	x
• • • • •	
Quick-locking nut (2 608 000 684) Vibration Control auxiliary handle	x
Quick-locking nut (2 608 000 684) Vibration Control auxiliary handle	x
Quick-locking nut (2 608 000 684) Vibration Control auxiliary handle	x
Quick-locking nut (2 608 000 684) Vibration Control auxiliary handle	x

ANGLE GRINDERS

ANGLE GRINDER

GWS 18V-10 C Professional



Part number	0 601 9G3	
Battery voltage	18 V	
No-load speed	9.000 rpm	
Grinding/cutting disc, diameter	125 mm	
Bore size, diameter	22.2 mm	
Grinding spindle thread	M 14	
Comes complete with	10A	10B
1/1 L-BOXX inlay for tool and charger (1 600 A01 166)	-	х
Backing flange (spare part number 2 605 703 014)	х	x
Cardboard box	x	-
L-BOXX 136 (1 600 A01 2G0)	-	x
Protective guard (1 605 510 365)	x	x
Quick-locking nut (2 608 000 684)	х	x
Vibration Control auxiliary handle (2 602 025 171)	х	x

ANGLE GRINDER GWS 18V-10 PC Professional



Part number	0 601 9G3		
Battery voltage	18 V		
No-load speed	9.000 rpm		
Grinding/cutting disc, diameter	125 mm		
Grinding spindle thread	M 14		
Comes complete with	E0A	E0B	
1/1 LBOXX inlay for tool and charger (1 600 A01 166)	-	x	
Backing flange (spare part number 2 605 703 014)	x	x	
Cardboard box	x	-	
L-BOXX 136 (1 600 A01 2G0)	-	х	
Protective guard (1 605 510 365)	x	х	
Quick-locking nut (2 608 000 684)	х	х	
Vibration Control auxiliary handle (2 602 025 171)	x	x	

ANGLE GRINDER GWS 18V-10 SC Professional



ANGLE GRINDER GWS 18V-10 SC Professional

Image: A state of the stat		
Technical data Part number	0.601.9G3	
	0 601 9G3 18 V	
Battery voltage No-load speed	4.000 – 7.500 rpm	
Grinding/cutting disc, diameter	150 mm	
Bore size, diameter	22.2 mm	
Grinding spindle thread	M 14	
Comes complete with		
1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 3WF)	x	
Backing flange (spare part number 2 605 703 014)	x	
L-BOXX 136 (1 600 A01 2G0)	x	
Protective guard (1 605 510 366)	x	
Quick-locking nut (2 608 000 684)	x	
Vibration Control auxiliary handle (2 602 025 171)	х	

ANGLE GRINDERS

ANGLE GRINDER GWS 18V-10 SC Professional





Technical data	
Part number	0 601 9G3
Battery voltage	18 V
No-load speed	4.500 – 9.000 rpm
Grinding/cutting disc, diameter	115 mm
Bore size, diameter	22.2 mm
Grinding spindle thread	M 14
Comes complete with	60B
1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 3WF)	x
1/1 L-BOXX inlay for tool and charger (1 600 A01 166)	х
Backing flange (spare part number 2 605 703 014)	х
L-BOXX 136 (1 600 A01 2G0)	x
Protective guard (1 605 510 364)	x
Quick-locking nut (2 608 000 684)	x
Vibration Control auxiliary handle (2 602 025 171)	х

ANGLE GRINDER **GWS 18V-10 PSC Professional**

L-BOXX 136 (1 600 A01 2G0)

Protective guard (1 605 510 365)

Quick-locking nut (2 608 000 684)

Vibration Control auxiliary handle (2 602 025 171)



х

х

х

х

х

ANGLE GRINDER

Image: Constraint of the second s	
Technical data	
Part number 0 601 9H6	
No-load speed 11.000 rpm	
Grinding/cutting disc, diameter 125 mm	
Bore size, diameter 22.2 mm	
Grinding spindle thread M 14	
Comes complete with 000	
Backing flange (spare part number x 2 605 703 014)	
LBOXX 136 (1 600 A01 2G0) x	
Protective guard (1 605 510 365) x	
Quick-locking nut (2 608 000 684) x	
Vibration Control auxiliary handle x (2 602 025 171)	

ANGLE GRINDER GWS 18V-15 SC Profes	sional	NEW!
Image: Constraint of the second se		
Technical data Part number No-load speed	0 601 9H6 3.400 - 11.000 rpm	
Grinding/cutting disc, diameter Bore size, diameter	125 mm 22.2 mm	
Grinding spindle thread	M 14	
Comes complete with	100	
1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 3WF)	x	
Backing flange (spare part number 2 605 703 014)	x	
L-BOXX 136 (1 600 A01 2G0)	x	
Protective guard (1 605 510 365)	x	
Quick-locking nut (2 608 000 684)	х	
Vibration Control auxiliary handle (2 602 025 171)	X	

ANGLE GRINDERS

ANGLE GRINDER GWX 18V-8 Professional NEW!

NEW!



Technical data		
Part number	0 601 9J7	
Battery voltage	18 V	
No-load speed	11.000 rpm	
Grinding/cutting disc, diameter	125 mm	
Comes complete with	000	001
1/1 L-BOXX inlay for tool and charger (1 600 A00 2WH)	x	-
Auxiliary handle (1 602 025 024)	х	х
Cardboard box	-	x
L-BOXX 136 (1 600 A01 2G0)	х	-
Protective guard (1 605 510 365)	x	x

GWX 18V-10 Professio			
Technical data			
Part number	0.601.780		
Part number No-load speed Grinding/cutting disc, diameter	0 601 7B0 9.000 rpm 125 mm		
No-load speed	9.000 rpm	101	
No-load speed Grinding/cutting disc, diameter	9.000 rpm 125 mm	101 x	
No-load speed Grinding/cutting disc, diameter Comes complete with 1/1 L-BOXX inlay for tool and charger	9.000 rpm 125 mm		
No-load speed Grinding/cutting disc, diameter Comes complete with 1/1 LEOXX inlay for tool and charger (1 600 A01 166)	9.000 rpm 125 mm 100 -	x	
No-load speed Grinding/cutting disc, diameter Comes complete with 1/1 L-BOXX inlay for tool and charger (1 600 A01 166) Auxiliary handle (1 602 025 024)	9.000 rpm 125 mm 100 - x	x	

ANGLE GRINDER **GWX 18V-10 C Professional**

Protective guard (1 605 510 365) Vibration Control auxiliary handle (2 602 025 171)



Technical data		
Part number	0 601 7B0	
Battery voltage	18 V	
No-load speed	9.000 rpm	
Grinding/cutting disc, diameter	125 mm	
Comes complete with	200	
1/1 L-BOXX inlay for tool and charger (1 600 A01 166)	х	
L-BOXX 136 (1 600 A01 2G0)	х	

x x

ANGLE GRINDER GWX 18V-10 PC Profe	ssional	NEW!
Image: Second state Image: Second state		
Technical data		
Part number	0 601 7B0	
Battery voltage	18 V	
No-load speed	9.000 rpm	
Grinding/cutting disc, diameter	125 mm	
Comes complete with	700	
1/1 L-BOXX inlay for tool and charger (1 600 A01 166)	x	
L-BOXX 136 (1 600 A01 2G0)	x	
Protective guard (1 605 510 365)	x	
Vibration Control auxiliary handle (2 602 025 171)	x	

ANGLE GRINDERS, STRAIGHT GRINDER



STRAIGHT GRINDERS, SHEAR, DUST EXTRACTOR

STRAIGHT GRINDER GGS 18V-23 LC Professional









Technical data	
Part number	0 601 229
No-load speed	23,000 rpm
Tool holder	Collet up to 8 mm diameter
Weight excl. battery	1.4 kg
Comes complete with	100
Collet with nut 6 mm (2 608 570 133)	х
L-BOXX 136 (1 600 A01 2G0)	х
Spanner 13 mm (spare part number 3 607 950 025)	x
Spanner 19 mm (spare part number 3 607 950 024)	x



NEW!

SHEAR **GSC 18V-16 Professional**



DUST EXTRACTOR **GAS 18V-1 Professional**

STRAIGHT GRINDER

And the second statement of the second secon

GGS 18V-23 PLC Professional



Part number	0 601 9C6
Battery voltage	18 V
Container volume	0.70 I
Filter surface area	55 cm ²
Max. vacuum pressure (turbine)	60 mbar
Max. airflow rate (turbine)	10.0 l/s
Comes complete with	200
2 x suction tubes	x
Crevice nozzle	х
Flexible extension tube	x
Floor nozzle	х

DUST EXTRACTORS



DUST EXTRACTOR GBL 18V-120 Professional



Technical data	
Part number	0 601 9F5
Battery voltage	18 V
No-load speed	17.000 rpm
Max. air speed	75 m/s
Max. airflow	120 m³/h
Runtime	Speed I : 9 min/Ah; Speed II : 5 min/Ah
Weight excl. battery	1.1 kg
Comes complete with	100
4 x Accessories (Nozzle, Extension tube, Deep hole Nozzle, Dust Collection Tube)	x

DUST EXTRACTOR GDE 18V-16 Professional



NEW!

DUST EXTRACTOR, CAULK GUN, WORKLIGHTS

DUST EXTRACTOR GDE 18V-26 D Professional

	· ·
Technical data	
Part number	1 600 A01
Comes complete with	TX0
Cardboard box	x
Dust eye fixed chuck, 16 mm diameter (1 600 A01 E28)	x
Dust eye fixed chuck, 26 mm diameter (1 600 A01 E29)	x
Dust eye quick change chuck, 16 mm diameter (1 600 A01 WOK)	x
Dust eye quick change chuck, 26 mm diameter (1 600 A01 WOJ)	x
Extension (1 600 A01 E27)	x
Metal adapter (1 600 A01 W0P)	x





Part number	0 601 9C4
Battery voltage	18 V
Push Force	3.5 kN
Capacity Cartridges	310; 400 ml
Capacity Sachets	400; 600 ml
Feed rate	9 mm/sec
Weight excl. battery	2.2 kg
Comes complete with	001
Cardboard box	x

WORKLIGHT GLI VariLED Professional



WORKLIGHT GLI 18V-300 Professional



PROFESSIONAL 18V SYSTEM

WORKLIGHTS

WORKLIGHT GLI 18V-1200 C Professional	WORKLIGHT GLI 18V-1900 Professional
$\begin{tabular}{ c c c c } \hline \begin{tabular}{ c c c c } \hline \hline \begin{tabular}{ c c c } \hline \hline \begin{tabular}{ c c c } \hline \hline \begin{tabular}{ c c } \hline \hline \ \begin{tabular}{ c c } \hline \hline \ \ \begin{tabular}{ c c } \hline \hline \ \ \ \ \end{tabular} \hline \hline \ \ \ \end{tabular} \hline \hline \ \ \end{tabular} \hline \hline \ \ \end{tabular} \hline \hline \ \end{tabular} \hline \hline \ \end{tabular} \hline \hline \ \end{tabular} \hline \ \end{tabular} \hline \hline \ \end{tabular} \hline \hline \ \end{tabular} \hline \hline \ \end{tabular} \hline \end{tabular} \hline \hline \end{tabular} \hline \ \end{tabular} \hline \hline \end{tabular} \hline \hline \end{tabular} \hline \end{tabular} \hline \hline \end{tabular} \hline \hline \end{tabular} \hline \end{tabular} \hline \end{tabular} \hline \hline \end{tabular}$	$\begin{tabular}{ c c c c } \hline \begin{tabular}{ c c c c } \hline \begin{tabular}{ c c } \hline \begi$
WORKLIGHT GLI 18V-2200 C Professional	WORKLIGHT GLI 18V-4000 C Professional
$\begin{tabular}{ c c c c } \hline \begin{tabular}{ c c c c c } \hline \begin{tabular}{ c c c c c c } \hline \begin{tabular}{ c c c c c c c c c c c c c c c c c c c$	Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system Image: Constraint of the system

PROFESSIONAL 18V SYSTEM

WORKLIGHT

WORKLIGHT GLI 18V-10000 C Profess	ional	NEW!
Technical data		
Part number	0 601 446	
Battery voltage	18 V	
Max. operating time 18 V	12.5 mins/Ah	
Weight excl. battery	3.9 kg	
Comes complete with	900	
Cardboard box	х	





															\top	\top				1		
															\top	\top						\neg
																				1		
																				1		
															\top							
															\top							\neg
															\neg							
																				1		
																				1		_
-		 			 												 		 			







From light to robust series – Bosch Professional drill drivers are truly versatile tools made to help you fit and loosen screws the right way.

Summary of contents81Cordless drill drivers82Cordless screwdriver83FlexiClick adapters86Cordless impact drivers/wrenches87Impact wrenches89Cordless drywall screwdrivers

93 Cordless combi drills



CORDLESS DRILL DRIVERS

Cordless drill/drivers from Bosch are not only powerful, they also set standards in size and weight. They impress with their optimum weight, robustness and long battery runtime.

CORDLESS DRILL DRIVER GSR 12V-15 Professional

Technical data	
Part number	0 601 868
Battery voltage	12 V
Torque (soft/hard/max.)	15/30/- Nm
No-load speed (1st gear / 2nd gear)	0 – 400 / 0 – 1.300 rpm
Max. screw diameter	7 mm
Max. drilling diameter in wood	19 mm
Comes complete with	101
1/2 L-BOXX inlay for tool (1 600 A00 2V8)	x
Cardboard box	x

CORDLESS DRILL DRIVER GSR 12V-15 FC Professional



CORDLESS DRILL DRIVERS

CORDLESS DRILL DRIVE GSR 12V-35 Professiona		NEW!	CORDLESS DRILL DRIVE GSR 12V-35 Professiona		NEW!
Image: Second	0 601 9H8 12 V 20/35/- Nm 0 - 460 / 0 - 1.750 rpm 8 mm 32 mm 32 mm 1000001 x - x	RIUSHLLOS MOTOR	$\hline \\ \hline \\$	0 601 9H8 12 V 20/35/- Nm 0 - 460 / 0 - 1.750 rpm 8 mm 32 mm 070 x x x x	BRUSHLESS MOTOR
CORDLESS DRILL DRIVE GSR 12V-35 FC Professio		NEW!	CORDLESS DRILL DRIVE GSR 18V-28 Professiona		
1750 35/20 M Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe Image: State of the sympe	x x	004 - - - -	63/28 Image:	0 601 9H4 18 V 28/63/- Nm 0 - 500 / 0 - 1.900 rpm 8 mm 38 mm 38 mm 31 m0	

CORDLESS DRILL DRIVERS

CORDLESS DRILL DRIVER CORDLESS DRILL DRIVER GSR 18V-28 Professional 0-450/ 1750 min^/rpm 63/28 Nm 55/28 Nm Technical data **Technical data** 0 601 9H4 art numbe Part nu Battery voltage 18 V Torque (soft/hard/max.) Torque (soft/hard/max.) 28/63/- Nm No-load speed (1st gear / 2nd gear) No-load speed (1st gear / 2nd gear) 0 - 500 / 0 - 1.900 rpm Max. screw diameter Max. screw diameter Max. drilling diameter in wood 8 m Comes complete with Max, drilling diameter in wood 38 mr Comes complete with 2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) Cardboard box ... 171 L-BOXX 136 (1600A012G0) L-BOXX 136 (1 600 A01 2G0) x L-BOXX inlay for tool and charger x Quick charger AL 1860 CV (2 607 225 323) х

NEW!

MOTOR



CORDLESS DRILL DRIVER GSR 18V-55 Professional	
55/28 Wm Em E	

Technical data	
Part number	0 601 9H5
Torque (soft/hard/max.)	28/55/- Nm
No-load speed (1st gear / 2nd gear)	0 – 460 / 0 – 1.800 rpm
Max. screw diameter	10 mm
Max. drilling diameter in wood	35 mm
Comes complete with	271
	x
2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	X
2 x battery GBA 18V 2.0Ah (1 600 200 036) L-BOXX 136 (1 600 A01 2G0)	X X
L-BOXX 136 (1 600 A01 2G0) Quick charger GAL 18V-40 Professional	x

CORDLESS DRILL DRIVER GSR 18V-60 C Professional



CORDLESS DRILL DRIVERS

CORDLESS DRILL DRIVER



CORDLESS DRILL DRIVER GSR 18V-60 FC Professional



COODWER COMPANY COMPANY AND CODER			
Technical data			
Part number	0 601 9G7		
Battery voltage	18 V		
Torque (soft/hard/max.)	31/60/- Nn	n	
No-load speed (1st gear / 2nd gear)	0 - 600 / 0) – 1.900 rpm	
Max. screw diameter	10 mm		
Max. drilling diameter in wood	38 mm		
Comes complete with	102	103	170
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	х
Angle adapter GFA 18-W Professional (1 600 A01 3P7)	-	x	x
Hammer adapter incl. auxiliary handle GFA 18-H Professional (1 600 A00 3NF)	-	x	х
L-BOXX 136 (1 600 A01 2G0)	x	x	x
L-BOXX inlay for tool	x	x	-
L-BOXX inlay for tool and charger	-	-	x
Metal chuck adapter GFA 18-M Professional (1 600 A01 3P6)	x	x	x
Off-set angle adapter GFA 18-E Professional (1 600 A00 1SJ)	-	x	x
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-	x

CORDLESS DRILL DRIVER GSR 36 VE-2-LI Professional



CORDLESS SCREWDRIVER

CORDLESS SCREWDRIVER GSR 12V-20 HX Professional







Technical data		
Part number	0 601 9D4	
Battery voltage	12 V	
Torque (soft/hard/max.)	18/20/- Nm	
No-load speed (1st gear / 2nd gear)	0 - 400 / 0 - 1.300 rpm	n
Max. screw diameter	7 mm	
Max. drilling diameter in wood	30 mm	
Comes complete with	102	170
1 x belt clip, 1 x bit holder, 4 x colour clip	х	х
1/2 L-BOXX inlay for accessories (1 600 A00 2WY)	-	x
1/2 L-BOXX inlay for tool (1 600 A00 2WX)	x	x
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	х
Cardboard box	x	-
L-BOXX 102 (1 600 A01 2FZ)	-	x
Quick charger GAL 1230 CV (1 600 A00 R44)	-	x

FLEXICLICK ADAPTERS

FLEXICLICK ADAPTER GFA 18-M Professional



FLEXICLICK ADAPTER GFA 18-W Professional



FLEXICLICK ADAPTER GFA FC2 Professional



FLEXICLICK ADAPTER GWA FC2 Professional



FLEXICLICK ADAPTER GEA FC2 Professional



FLEXICLICK ADAPTER GHA FC2 Professional





IMPACT DRIVERS/WRENCHES

The high impact forces of the Bosch impact wrenches enable powerful and rapid bolting, e.g. for fitting truck wheels, mechanical engineering with steel and constructing scaffolding and shelf systems.

CORDLESS IMPACT DRIVER
GDR 12V-105 Professional

Image: Second		
Technical data		
Part number	0 601 9A6	
Battery voltage	12 V	
Torque, max.	105 Nm	
Screw diameter	M 4 – M 12	
No-load speed	0-2.600 rpm	
Impact rate	0-3.100 bpm	
Tool holder	1/4" internal hexagon	
Comes complete with	901	976
1/2 L-BOXX inlay for accessories (1 600 A00 2WY)	-	x
1/2 L-BOXX inlay for tool (1 600 A00 2V8)	х	-
1/2 L-BOXX inlay for tool and charger (1 600 A00 2V2)	-	x
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	х
Cardboard box	x	-
L-BOXX 102 (1 600 A01 2FZ)	-	x
Quick charger GAL 1230 CV (1 600 A01 16B)	-	x
Quick charger GAL 12V-40 Professional (1 600 A01 9R4)	-	x

CORDLESS IMPACT DRIVER GDR 12V-110 Professional

Image: Constraint of the second sec		
Technical data		
Part number	0 601 9E0	
Battery voltage	12 V	
Torque, max. Screw diameter	110 Nm M 4 – M 12	
No-load speed (1st level)	0-1.200 rpm	
Impact rate	0-3.100 bpm	
Tool holder	1/4" internal hexagon	
Comes complete with	002	
Cardboard box	x	
L-BOXX inlay for tool	х	

CORDLESS IMPACT DRIVERS/WRENCHES

CORDLESS IMPACT DRIVER GDR 18V-160 Professional

160 0-3600 bom 2800 0:



Part number	0 601 9G5	
Torque, max.	160 Nm	
Screw diameter	M 6 – M 14	
No-load speed	0-2.800 rpm	
Impact rate	0-3.600 bpm	
Tool holder	1/4" internal he	exagon
Comes complete with	104	170
1/2 L-BOXX inlay for accessories (1 600 A00 2WC)	x	x
1/2 L-BOXX inlay for tool (1 600 A00 M7R)	x	x
1/2 LBOXX inlay for tool (1 600 A00 M7R) 2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	× _	x
2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	-	x

CORDLESS IMPACT DRIVER GDR 18V-200 C Professional



3

Nm mn yrpm upm 1/4"				
Technical data				
Part number	0 601 9G4			
Torque, max.	200 Nm			
Screw diameter	M 6 - M 16			
No-load speed	0-3.400 rpr	n		
No-load speed (1st level)	0-1.100 rpr	n		
Impact rate	0-4.000 bp	m		
Tool holder	1/4" intern	al hexagon		
Comes complete with	102	104	170	171
1/2 L-BOXX inlay for accessories (1 600 A00 2WC)	x	-	х	x
1/2 L-BOXX inlay for tool and charger (1 600 A01 CU5)	x	x	x	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	-	х
2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)	-	-	x	-
Cardboard box	-	х	-	-
L-BOXX 136 (1 600 A01 2G0)	х	-	х	x
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-	х	х

CORDLESS IMPACT WRENCH GDS 12V-115 Professional

Image: Constraint of the second sec		
Technical data		
Part number	0 601 9E0	
Battery voltage	12 V	
Torque, max.	115 Nm	
Screw diameter	M 4 – M 12	
No-load speed	0-2.600 rpm	
No-load speed (1st level)	0-1.200 rpm	
Impact rate	0-3.100 bpm	
Tool holder	3/8" external square	
Comes complete with	101	
Cardboard box	x	
L-BOXX inlay for tool	x	



CORDLESS IMPACT DRIVERS/WRENCHES, IMPACT WRENCH

CORDLESS IMPACT WRE GDS 18V-300 Professiona		P	NEW!	CORDLESS IMPACT DR GDX 18V-180 Professio	
Image: Second	Ó			900 bpm 2800 mr/pm 180 br 100 br + ser Image: State	
Part number	0 601 9D8			Part number	0 601 9G5
Battery voltage	18 V			Battery voltage	18 V
Torque, max.	300 Nm			Torque, max.	180 Nm
Screw diameter	M 10 – M 18			No-load speed	0-2800 rpm
No-load speed	0-2.400 rpm			Impact rate	0-3600 bpm
Impact rate	0-3.400 bpm			Tool holder	1/4" internal hexagon and 1/2" external square
Tool holder		quare friction ri	ng + through hole	Comes complete with	202
Comes complete with	200	201	270	L-BOXX 136 (1600A012G0)	x
2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)) –	-	х		
Cardboard box	х	-	-		
L-BOXX 136 (1 600 A01 2G0)	-	x	x		
Quick charger GAL 18V-40 Professional (1 600 A01 9RK)	-	-	x		

CORDLESS IMPACT DRIVER/WRENCH GDX 18V-200 C Professional

Image: Constraint of the second sec				
Technical data				
Part number	0 601 9G4			
Torque, max.	200 Nm			
Screw diameter	M 6 - M 16			
No-load speed	0-3.400 rpr	n		
No-load speed (1st level)	0-1.100 rpr	n		
Impact rate	0-4.000 bp	m		
Tool holder	1/4" intern	al hexagon a	nd 1/2" exter	nal square
Comes complete with	202	204	270	271
1/2 L-BOXX inlay for accessories (1 600 A00 2WC)	x	-	x	x
1/2 L-BOXX inlay for tool and charger (1 600 A01 CU5)	x	x	x	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	-	x
2 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)	-	-	х	-
Cardboard box	-	x	-	-
L-BOXX 136 (1 600 A01 2G0)	х	-	х	x
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-	x	x

IMPACT WRENCH GDS 18 E Professional



IMPACT WRENCH

IMPACT WRENCH GDS 30 Professional



Technical data	
Part number	0 601 435
Rated input power	920 W
Rated speed	860 rpm
Torque, max. (hard screwdriving applications)	1,000 Nm
Torque, max. (soft screwdriving applications)	500 Nm
Bit holder	1" external square
Weight	7.3 kg
Comes complete with	141
Auxiliary handle (2 602 025 075)	x
Carrying case (spare part number 1 605 438 1BZ)	x
Hanging loop (spare part number 3 601 310 013)	х
Voltage 110 V	x



DRYWALL SCREWDRIVERS

Precise and rapid screwdriving for drywall work – also in continuous use. Bosch depth stop screwdrivers provide exceptional comfort due to their handy shape.



GSR 18 V-EC TE Professional

(see page 89)

- Powerful and compact 18 V drive train capable of fixing 3,400 screws per (4.0 Ah) battery charge, even in narrow spaces
- Compact and lightweight design of 1.6 kg with 4.0 Ah for effortless work and comfortable handling
- Bosch's brushless motor technology with Electronic Motor Protection and motor brake for a long tool lifetime

CORDLESS DRYWALL SCREWDRIVERS, DRYWALL SCREWDRIVER

CORDLESS DRYWALL SCREWDRIVER MA55 Professional



CORDLESS DRYWALL SCREWDRIVER GSR 18V-EC TE Professional



Technical data	
Part number	1 600 Z00
Comes complete with	00Y
1 x screwdriver bit PH 2	х
Cardboard box	х

Torque, max. (hard/soft)	25 / 5 Nm
No-load speed	0 – 4.200 rpm
Max. screw diameter	4.2 mm
Comes complete with	004
1 x screwdriver bit PH 2	x
1/1 L-BOXX inlay for tool (1 600 A00 2WR)	x
Depth stop (2 600 460 058)	x
L-BOXX 136 (1 600 A01 2G0)	x
Magnetic universal holder (2 607 002 584)	x

CORDLESS DRYWALL SCREWDRIVER GTB 12V-11 Professional



DRYWALL SCREWDRIVER MA55 Professional





COMBI DRILLS

Cordless combis from Bosch in the 12 V to 36 V classes are power tools for the toughest screwdriving and drilling applications in wood and metal, and for impact drilling applications in masonry.



GSB 18V-55 Professional

(see page 92)

- ► Tough and powerful: performance of 55 Nm and 1,750 RPM for highest efficiency when working in wood, metal, and masonry
- ► Robust 13-mm Roehm metal chuck offers ideal power transfer for drilling and screwdriving
- Brushless motor ensures extensive tool lifetime and longer battery runtimes

CORDLESS COMBI DRILLS

CORDLESS COMBI DRILL GSB 12V-15 Professional





Technical data	
Part number	0 601 9B6
Battery voltage	12 V
Torque (soft/hard/max.)	15/30/- Nm
No-load speed (1st gear / 2nd gear)	0 – 380 / 0 – 1.300 rpm
Max. screw diameter	7 mm
Max. drilling diameter in masonry	10 mm
Comes complete with	901
1/2 L-BOXX inlay for tool and charger (1 600 A00 2UV)	х
Cardboard box	x

CORDLESS COMBI DRILL GSB 18V-21 Professional



3

Technical data	
Part number	0 601 9H1
Battery voltage	18 V
Torque (soft/hard/max.)	21/55/- Nm
No-load speed (1st gear / 2nd gear)	0 – 480 / 0 – 1.800 rpm
Max. screw diameter	10 mm
Max. drilling diameter in masonry	10 mm
Comes complete with	171
Comes complete with 2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	171 x
2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	x
2 x battery GBA 18V 2.0Ah (1 600 Z00 036) Charger GAX 18V-30 (1 600 A01 1AA)	x x
2 x battery GBA 18V 2.0Ah (1 600 Z00 036) Charger GAX 18V-30 (1 600 A01 1AA)	x x
2 x battery GBA 18V 2.0Ah (1 600 Z00 036) Charger GAX 18V-30 (1 600 A01 1AA)	x x

CORDLESS COMBI DRILL GSB 18V-21 Professional





Technical data			
Part number	0 601 9H1		
Battery voltage	18 V		
Torque (soft/hard/max.)	21/55/- Nm		
No-load speed (1st gear / 2nd gear)	0 - 480 / 0 - 1	800 rpm	
Max. screw diameter	10 mm		
Max. drilling diameter in masonry	10 mm		
Comes complete with	108	176	
L-BOXX 136 (1 600 A01 2G0)	х	-	
Cardboard box	-	х	

CORDLESS COMBI DRILL GSB 18V-28 Professional



Part number	0 601 9H4
Battery voltage	18 V
Torque (soft/hard/max.)	28/63/- Nm
No-load speed (1st gear / 2nd gear)	0 – 500 / 0 – 1.900 rpm
Max. screw diameter	8 mm
Max. drilling diameter in masonry	13 mm
Comes complete with	071
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	x
L-BOXX 136 (1 600 A01 2G0)	x
L-BOXX inlay for tool and charger	x
Quick charger AL 1860 CV (2 607 225 323)	x

CORDLESS COMBI DRILLS

CORDLESS COMBI DRIL GSB 18V-28 Professiona		NEW!	GSB 18V-28 Professional	
s3/28) Mm Essan Technical data Part number Battery voltage Torque (soft/hard/max.) No-load speed (1st gear / 2nd gear) Max. screw diameter Max. drilling diameter in masonry Comes complete with LEOXX 136 (1 600 A01 2G0)	0 601 9H4 18 V 28/63/- Nm 0 - 500 / 0 - 1.900 rpm 8 mm 13 mm 008 x		63/28 Image: State S	0 601 9H4 18 V 28/63/- Nm 0 - 500 / 0 - 1.900 rpm 8 mm 13 mm 000 x
		NEW!	CORDLESS COMBI DRIL GSB 18V-60 C Profession	
Y28 Y	0 601 9H5 28/55/ Nm 0 – 460 / 0 – 1.800 rpm 13 mm	NEW!		

CORDLESS COMBI DRILLS



1

KICKBACK





Technical data	
Part number	0 601 9D9
Battery voltage	18 V
Torque (soft/hard/max.)	42/85/- Nm
No-load speed (1st gear / 2nd gear)	0 – 440 / 0 – 1.850 rpm
Max. screw diameter	10 mm
Max. drilling diameter in masonry	16 mm
Comes complete with	302
1/1 L-BOXX inlay for tool and charger (1 600 A00 2WW)	х
2 x battery GBA 18V 4.0Ah (1 600 Z00 038)	-
Auxiliary handle (2 609 199 662)	x
L-BOXX 136 (1 600 A01 2G0)	x
Quick charger AL 1860 CV (2 607 225 324)	-







Offering a professionally tested balance of power and durability, our professional impact drills and screwdrivers are designed to meet your standards and move your work forward.

	Summary of contents
97	Impact drills
97	System accessory
99	Drill
100	Stirrer



IMPACT DRILLS

The Bosch Professional impact drills meet the highest requirements with regard to power, versatility and precision. Bosch impact drills are developed for professional users with high requirements with regard to performance and lifetime.

IMPACT DRILL **GSB 13 RE Professional**

P

Technical dat



Rated input power	600 W								
No-load speed, 1st gear	0 – 2.800 rpm								
Drilling diameter in wood	25 mm								
Drilling diameter in steel	10 mm								
Drilling diameter in concrete	13 mm								
Comes complete with	160	170							
Comes complete with Depth stop 210 mm (2 603 001 019)	160 ×	170 ×							
-									
Depth stop 210 mm (2 603 001 019)	x	x							
Depth stop 210 mm (2 603 001 019) Keyless chuck 13 mm (2 608 572 149)	x x	x x							

IMPACT DRILL GSB 16 RE Professional

Technical data		
Part number	0 601 14E	
Rated input power	750 W	
No-load speed, 1st gear	0 – 2.800 rpm	
Drilling diameter in wood	30 mm 13 mm	
Drilling diameter in steel	13 mm 16 mm	
Drilling diameter in concrete Comes complete with	16 mm 560	570
Auxiliary handle (2 605 025 190)	560 X	570 X
Carrying case (2 605 438 524)	x	x
Depth stop 210 mm (1 613 001 010)	x	x
Keyless chuck 13 mm (2 608 572 149)	x	x
Voltage 110 V	x	-
Voltage 240 V	-	x

IMPACT DRILLS, SYSTEM ACCESSORY

IMPACT DRILL GSB 1600 RE Professional



		-
Technical data		
Part number	0 601 218	
Rated input power	701 W	
No-load speed, 1st gear	0-3000 rpm	
Drilling diameter in concrete	16 mm	
Drilling diameter in wood	30 mm	
Drilling diameter in steel	12 mm	
Drilling diameter in masonry	18 mm	
Comes complete with	162	172
Carrying case (2 605 438 607)	x	х
Keyless chuck 13 mm (2 608 572 105)	х	х
Voltage 110 V	х	-
Depth stop 210 mm (2 603 001 019)	х	х
Auxiliary handle (0612 025 024)	х	х
Keyless chuck	х	х
Voltage 240 V	-	х

IMPACT DRILL GSB 21-2 RE Professional



Part number	0 601 19C	
Rated input power	1,100 W	
No-load speed, 1st gear	0 – 900 rpm	
Rated speed	580 / 1.900 rpm	
Drilling diameter in wood	40 / 25 mm	
Drilling diameter in steel	16 / 8 mm	
Drilling diameter in concrete	22 / 13 mm	
Comes complete with	560	570
Auxiliary handle (2 602 025 193)	х	x
Carrying case (2 605 438 524)	х	х
Depth stop 210 mm (1 613 001 010)	х	х
Keyless chuck 13 mm (2 608 572 150)	х	x
Voltage 110 V	x	-
Voltage 240 V	-	x

IMPACT DRILL GSB 162-2 RE Professional





where the stand states		
Technical data		
Part number	0 601 18B	
Rated input power	1,500 W	
No-load speed, 1st gear	0 – 750 rpm	
Rated speed	555 / 1.300 rpm	
Drilling diameter in wood	50 / 32 mm	
Drilling diameter in steel	20 / 14 mm	
Drilling diameter in concrete	82 / 82 mm	
Comes complete with	060	070
Auxiliary handle (2 608 025 205)	х	х
Carrying case	х	х
Depth stop (spare part number 2 600 460 045)	х	х
Keyed chuck 16 mm (1 608 571 057)	х	х
Voltage 110 V	х	-
Voltage 240 V	-	x

SYSTEM ACCESSORY GDE 16 Cyl Professional





DRILLS AND ANGLE DRILLS

The powerful Bosch drills with durable drill chuck offer high torque, a compact design and easy handling.



GBM 13-2 RE Professional

(see page 99)

- ▶ Powerful 750 W motor and high torque for fast work progress, drilling holes in steel of up to 13 mm in diameter
- Compact and ergonomic design providing good tool handling for precise results
- 2-speed gearbox with speed preselection setting wheel for accurate performance in versatile applications

DRILL

DRILL GBM 13-2 RE Professional



0 601 1B2									
750 W									
0 – 1.000 rpm									
20 / 12 mm									
32 / 20 mm									
13 / 8 mm									
060	070								
х	х								
x	x								
х	x								
x	x								
x	-								
-	x								
	750 W 0 - 1.000 rpm 20 / 12 mm 32 / 20 mm 13 / 8 mm 060 x x x x x x x								



STIRRERS

Materials with different viscosity, such as paints, lacquers, concrete and mortar, can be thoroughly mixed with the powerful stirrers from Bosch.

STIRRER GRW 12 E Profession	al	
	R	
Technical data		
Part number	0 601 1A7	
Rated input power	1,200 W	
No-load speed	1.000 rpm	
Max. torque	12,0 Nm	
Comes complete with	060	070
Stirrer basket 140 mm diameter (2 607 990 023)	x	x
Voltage 110 V	Х	-
Voltage 240 V	-	x





_		 			 		 	 					 	 					 				
			_									-										+	-
		 				 	 		 		 								 			—	
							 												 			—	
			_									_										+	
							 					_											_
																						—	
																						+	
		 	_			 	 	 	 		 	_	 				-		 _				
							 															—	
																						-	_
			_																			-	
							 					_							_				_
		 				 	 	 	 		 								 			—	
																					\square	\perp	
																						-	
																						+	-
																					-+	+	
							 												 		-+		
																					\square	\downarrow	
]]]]]]	Ī		Ī					
																						+	
																							_







Concrete, stone and armour – the hardest materials on the job site set the standards for tools by Bosch Professional with high performance and robustness.

	Summary of contents
109	Cordless rotary hammers
111	Rotary hammers with SDS plus
111	Dust extraction with SDS plus
113	Rotary hammers with SDS max
113	Dust extractions with SDS max
116	Demolition hammers with SDS plus / SDS max
116	Dust extraction system demolition hammer
118	Breakers
118	Dust extraction system breaker



ROTARY HAMMERS WITH SDS PLUS / SDS MAX

Developed for various drilling applications in concrete, stone, metal and steel, Bosch rotary hammers set standards with regard to performance and sturdiness.



GBH 18V-45 C Professional

(see page 108)

- Cordless freedom with corded performance thanks to BITURBO Brushless technology.
- ► Lighter than comparable corded products thanks to a highly optimized drive train, even with attached ProCORE18V 12.0Ah battery
- KickBack Control for reduced hazard of sudden tool reactions and Soft Start EPC & ASC for a comfortable and precise work process.

CORDLESS ROTARY HAMMERS

CORDLESS ROTARY HAMMER GBH 18 V-LI Compact Professional





Technical data	
Part number	0 611 905
Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 12 mm
Max. drilling diameter in metal	8 mm
Max. drilling diameter in wood	16 mm
Max. impact energy	1 J
Rated speed	0 – 1.050 rpm
Impact rate at rated speed	0 – 4.950 bpm
Tool holder	SDS plus
Comes complete with	300
Cardboard box	х
Machine cloth	x



CORDLESS ROTARY HAMMER



Technical data	
Part number	0 611 905
Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 12 mm
Max. drilling diameter in metal	8 mm
Max. drilling diameter in wood	16 mm
Max. impact energy	1 J
Rated speed	0 – 1.050 rpm
Impact rate at rated speed	0 – 4.950 bpm
Tool holder	SDS plus
Comes complete with	304
1/1 L-BOXX inlay for tool (1 600 A00 2VL)	x
L-BOXX 136 (1 600 A01 2G0)	x

CORDLESS ROTARY HAMMER GBH 18 V-LI Compact Professional



Technical data	
Part number	0 611 905
Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 12 mm
Max. drilling diameter in metal	8 mm
Max. drilling diameter in wood	16 mm
Max. impact energy	1 J
Rated speed	0 – 1.050 rpm
Impact rate at rated speed	0 – 4.950 bpm
Tool holder	SDS plus
Comes complete with	374
1/1 L-BOXX inlay for tool (1 600 A00 2VL)	х
2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	x
Charger AL 1820 CV (2 607 225 426)	x
L-BOXX 136 (1 600 A01 2G0)	х

CORDLESS ROTARY HAMMER GBH 18 V-20 Professional

numbe



Max. impact energy	1.7 J		
Rated speed	0-1800 rpm		
Impact rate at rated speed	0-4550 bpm		
Tool holder	SDS plus		
Comes complete with	073	000	001
2 x 5.0 Ah 18 V batteries	х	-	-
AL 1860 CV charger	х	-	-
Depth stop	х	х	-
Machine cloth	х	х	-
L-BOXX	х	-	х
Cardboard box	-	х	-

CORDLESS ROTARY HAMMERS

CORDLESS ROTARY HAMMER GBH 18V-21 Professional





Technical data			
Part number	0 611 911		
Battery voltage	18 V		
Max. impact energy	2 J		
Impact rate at rated speed	0 – 5.100 b	pm	
Rated speed	0 – 1.800 r	pm	
Weight excl. battery	2,3 (2,4) k	3	
Tool holder	SDS plus		
Drilling dia. in concrete with hammer drill bits	4 – 20 mm		
Opt. app. range in concrete with hammer drill bits	6 – 10 mm		
Max. drilling diameter in metal	13 mm		
Max. drilling diameter in wood	30 (13) mn	n	
Sound pressure level	90 dB(A)		
Sound power level 101 dB(A)	Uncertainty	/ K= 3 dB	
Comes complete with	100	101	172
Depth stop (spare part number 1 613 001 009)	x	x	х
Machine cloth (spare part number 1 619 200 413)	x	x	x
Cardboard box	x	-	-
L-BOXX 136 (1 600 A00 1RR)	-	x	-
Auxiliary handle (1 602 025 08X)	-	-	x

CORDLESS ROTARY HAMMER GBH 18 V-EC Professional



Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 18 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	20 mm
Max. impact energy	1.7 J
Rated speed	0 – 1.400 rpm
Impact rate at rated speed	0 – 4.550 bpm
Tool holder	SDS plus
Comes complete with	000
Auxiliary handle (2 602 025 141)	x
Cardboard box	x
Depth stop 210 mm (1 613 001 010)	x
Machine cloth	x

CORDLESS ROTARY HAMMER GBH 18 V-EC Professional



Technical uata	
Part number	0 611 904
Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 18 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	20 mm
Max. impact energy	1.7 J
Rated speed	0 – 1.400 rpm
Impact rate at rated speed	0 – 4.550 bpm
Tool holder	SDS plus
Comes complete with	077
1/1 L-BOXX inlay for tool and charger (1 600 A00 2WF)	х
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	x
Auxiliary handle (2 602 025 141)	x
Depth stop 210 mm (1 613 001 010)	x
Depth stop 210 mm (1 613 001 010) L-BOXX 136 (1 600 A01 2G0)	x x
L-BOXX 136 (1 600 A01 2G0)	x
L-BOXX 136 (1 600 A01 2G0) Machine cloth	x x

CORDLESS ROTARY HAMMER GBH 18 V-EC Professional

Technical data Part number	0 611 904
Battery voltage	18 V
Drilling dia. in concrete with hammer drill bits	4 – 18 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	20 mm
Max. impact energy	1.7 J
Rated speed	0 – 1.400 rpm
Impact rate at rated speed	0 – 4.550 bpm
Tool holder	SDS plus
Comes complete with	003
Auxiliary handle (2 602 025 141)	x
Depth stop 210 mm (1 613 001 010)	x
L-BOXX 136 (1 600 A01 2G0)	x

CORDLESS ROTARY HAMMERS

CORDLESS ROTARY HAMMER GBH 18V-26 F Professional





Technical data				
Part number	0 611 910 .			
Battery voltage	18 V			
Drilling dia. in concrete with hammer drill bits	4 – 26 mm			
Max. drilling diameter in metal	13 mm			
Max. drilling diameter in wood	30 mm			
Max. impact energy	2.6 J			
Rated speed	0 – 980 rpn	n		
Impact rate at rated speed	0 – 4.350 b	pm		
Tool holder	SDS plus			
Comes complete with	000	072	074	078
1 x battery ProCORE18V 8.0Ah (1 607 A35 0CG)	-	-	-	х
1/1 L-BOXX inlay for tool (1 600 A00 HP1)	-	х	-	х
1/1 L-BOXX inlay for tool and GDE 18V-16 (1 600 A00 HP2)	-	-	x	-
2 x battery GBA 18V 6.0Ah (1 600 A00 4ZN)	-	x	х	-
Auxiliary handle (2 602 025 141)	x	х	x	х
Cardboard box	x	-	-	-
Depth stop 210 mm (1 613 001 010)	x	x	x	х
Dust extraction system GDE 18V-16 Professional (1 600 A00 51M)	-	-	x	-
L-BOXX 136 (1 600 A01 2G0)	-	x	-	x
L-BOXX 238 (1 600 A01 2G2)	-	-	x	-
Machine cloth	x	х	x	-
Quick change chuck 13 mm (2 608 572 212)	x	x	х	x
Quick charger GAL 1880 CV (1 600 A00 B8G)	-	х	x	-
Quick charger GAL 18V-160 C Professional (1 600 A01 9S7)	-	-	-	x
SDS plus quick-change chuck (2 608 572 213)	x	x	x	x

CORDLESS ROTARY HAMMER GBH 18V-26 Professional



Technical data			
Part number	0 611 909		
Battery voltage	18 V		
Drilling dia. in concrete with hammer drill bits	4 – 26 mm		
Max. drilling diameter in metal	13 mm		
Max. drilling diameter in wood	30 mm		
Max. impact energy	2.6 J		
Rated speed	0 – 980 rpm		
Impact rate at rated speed	0 – 4.350 bpm		
Tool holder	SDS plus		
Comes complete with	000	001	
1/1 L-BOXX inlay for tool (1 600 A00 HP1)	-	х	
Auxiliary handle (2 602 025 141)	x	x	
Cardboard box	х	-	
Depth stop 210 mm (1 613 001 010)	x	x	
L-BOXX 136 (1 600 A01 2G0)	-	x	
Machine cloth	х	x	



CORDLESS ROTARY HAMMERS



CORDLESS ROTARY HAMMER GBH 36 V-EC Compact (2.0 Ah) Professional



Technical data	
Part number	0 611 903
Battery voltage	36 V
Drilling dia. in concrete with hammer drill bits	4 – 18 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	30 mm
Max. impact energy	1.8 J
Rated speed	0 – 1.500 rpm
Impact rate at rated speed	0 – 4.850 bpm
Tool holder	SDS plus
Comes complete with	R7F
1/1 LBOXX inlay for tool and charger (1 600 A00 3RD)	х
2 x battery GBA 36V 2.0Ah (1 600 Z00 03B)	x
Auxiliary handle (spare part number 1 612 025 078)	x
Charger AL 3640 CV (2 607 225 102)	x
Depth stop 210 mm (2 603 001 019)	x
L-BOXX 238 (1 600 A01 2G2)	x

CORDLESS ROTARY HAMMER GBH 36 V-LI Plus Professional



CORDLESS ROTARY HAMMERS, ROTARY HAMMER WITH SDS PLUS

CORDLESS ROTARY HAMMER GBH 36 V-LI Plus Professional





Technical data	
Part number	0 611 906
Battery voltage	36 V
Drilling dia. in concrete with hammer drill bits	4 – 28 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	30 mm
Max. impact energy	3.2 J
Rated speed	0 – 940 rpm
Impact rate at rated speed	0 – 4.200 bpm
Tool holder	SDS plus
Comes complete with	075
1/1 LBOXX inlay for tool and charger (1 600 A00 4L0)	-
2 x battery GBA 36V 6.0Ah (1 600 A00 L1M)	x
Auxiliary handle (2 602 025 191)	x
Carrying case (1 600 A00 4E5)	x
Depth stop (1 613 001 003)	x
L-BOXX 238 (1 600 A01 2G2)	-
Quick charger	x



CORDLESS ROTARY HAMMER GBH 36 VF-LI Plus Professional

| **f**] 🗲 🕕 💽 📰 171 1 KICKBACI Technical data 0 611 907 Battery voltage 36 V Drilling dia, in concrete with hammer drill bits 4 – 28 mm Max. drilling diameter in metal 13 mm Max. drilling diameter in wood 30 mm

Max. impact energy	3.2 J
Rated speed	0 – 940 rpm
Impact rate at rated speed	0 – 4.200 bpm
Tool holder	SDS plus
Comes complete with	000
Depth stop (spare part number 1 613 001 009)	x
Grease tube (spare part number 1 615 430 010)	x
L-BOXX	x
Machine cloth (spare part number 1 619 200 413)	X

ROTARY HAMMER WITH SDS PLUS GBH 2-20 D Professional

CORDLESS ROTARY HAMMER GBH 36 V-LI Plus Professional



ROTARY HAMMERS WITH SDS PLUS

ROTARY HAMMER WITH SDS PLUS

GBH 2-26 Professional



Technical data Part number

Part number	0 611 2A3	
Rated input power	830 W	
Impact energy	2,7 J	
Rated speed	0 – 900 rpm	
Impact rate at rated speed	0 – 4.000 bpm	
Drilling dia. concrete, hammer drill bits	4 – 26 mm	
Max. drilling diameter masonry, core cutters	68 mm	
Max. drilling diameter in metal	13 mm	
Max. drilling diameter in wood	30 mm	
Vibration level (drilling/chiselling)	17,5/14,0 m/s ²	
Tool holder	SDS plus	
Weight	2.7 kg	
Comes complete with	060	070
Auxiliary handle (2 602 025 141)	х	х
Carrying case	х	x
Depth stop 210 mm (1 613 001 010)	х	x
Machine cloth	х	х
Voltage 110 V	х	-
Voltage 240 V	-	x

ROTARY HAMMER WITH SDS PLUS GBH 2-26 F Professional



Technical data		
Part number	0 611 2A4	
Rated input power	830 W	
Impact energy	2,7 J	
Rated speed	0 – 900 rpm	
Impact rate at rated speed	0 – 4.000 bpm	
Drilling dia. concrete, hammer drill bits	4 – 26 mm	
Max. drilling diameter masonry, core cutters	68 mm	
Max. drilling diameter in metal	13 mm	
Max. drilling diameter in wood	30 mm	
Vibration level (drilling/chiselling)	16,5/14,0 m/s ²	
Tool holder	SDS plus	
Weight	2.9 kg	
Comes complete with	060	070
Auxiliary handle (2 602 025 141)	х	х
Carrying case	х	х
Depth stop 210 mm (1 613 001 010)	х	х
Machine cloth	х	х
Quick change chuck 13 mm (2 608 572 212)	х	х
SDS plus quick-change chuck (2 608 572 213)	х	х
Voltage 110 V	х	-
Voltage 240 V	-	x

ROTARY HAMMER WITH SDS PLUS GBH 2-28 Professional



ROTARY HAMMER WITH SDS PLUS GBH 2-28 F Professional



ROTARY HAMMERS WITH SDS PLUS, DUST EXTRACTION WITH SDS PLUS, ROTARY HAMMER WITH SDS MAX

ROTARY HAMMER WITH SDS PLUS GBH 3-28 DFR Professional





ROTARY HAMMER WITH SDS PLUS GBH 4-32 DFR Professional



Part number	0 611 332	
Rated input power	900 W	
Impact energy	4,2 J	
Rated speed	0 – 800 rpm	
Impact rate at rated speed	0 – 3.600 bpm	
Drilling dia. concrete, hammer drill bits	6 – 32 mm	
Max. drilling diameter masonry, core cutters	90 mm	
Max. drilling diameter in metal	13 mm	
Max. drilling diameter in wood	32 mm	
Vibration level (drilling/chiselling)	12,0/9,0 m/s ²	
Tool holder	SDS plus	
Weight	4.7 kg	
Comes complete with	161	171
Auxiliary handle (2 602 025 176)	х	х
Carrying case (2 605 438 651)	х	х
Depth stop 310 mm (1 613 001 003)	х	х
Quick change chuck 13 mm (2 608 572 212)	х	х
SDS plus quick-change chuck (2 608 572 213)	х	х
Voltage 110 V	х	-
Voltage 240 V	-	х

DUST EXTRACTION WITH SDS PLUS **GDE 16 Plus Professional**





Technical data	
Part number	1 600 A00
Compatible with	all 2 and 3 kg Bosch SDS plus hammers with 50 mm collar
Drilling diameter	max. 16 mm; with core cutter max. 82 mm
Maximum drilling depth	120 mm
Weight	520 g
Comes complete with	15Z
Cardboard box	x

ROTARY HAMMER WITH SDS MAX GBH 5-40 D Professional



ROTARY HAMMERS WITH SDS MAX

ROTARY HAMMER WITH SDS MAX GBH 5-40 DCE Professional



Technical data		
Part number	0 611 264	
Rated input power	1,150 W	
Impact energy	8,8 J	
Rated speed	170 – 340 rpm	
Impact rate at rated speed	1.500 - 3.050 bpm	
Drilling dia. concrete, hammer drill bits	12 – 40 mm	
Vibration level (drilling/chiselling)	10,5/7,5 m/s ²	
Tool holder	SDS max	
Weight	6.8 kg	
Comes complete with	060	070
		070
Auxiliary handle (2 602 025 117)	x	x
Auxiliary handle (2 602 025 117) Carrying case (spare part number 1 615 438 460)		
Carrying case (spare part number	x x	x
Carrying case (spare part number 1 615 438 460)	x x	x x
Carrying case (spare part number 1 615 438 460) Grease tube (spare part number 1 615 430 010)	x x x	x x x
Carrying case (spare part number 1 615 438 460) Grease tube (spare part number 1 615 430 010) Machine cloth	x x x x	x x x x

ROTARY HAMMER WITH SDS MAX GBH 8-45 D Professional



recifical uata		
Part number	0 611 265	
Rated input power	1,500 W	
Impact energy	12,5 J	
Rated speed	0 – 305 rpm	
Impact rate at rated speed	1.380 - 2.720 bpm	
Drilling dia. concrete, hammer drill bits	12 – 45 mm	
Max. drilling diameter masonry, core cutters	45 mm	
Max. drilling diameter in metal	125 mm	
Max. drilling diameter in wood	80 mm	
Vibration level (drilling/chiselling)	18,5/14,0 m/s ²	
Tool holder	SDS max	
Weight	8.2 kg	
Comes complete with	160	170
Auxiliary handle (spare part number 1 612 025 004)	x	x
Carrying case (spare part number 1 615 438 51A)	x	x
Grease tube (spare part number 1 615 430 010)	x	x
Machine cloth	х	х
Voltage 110 V	х	-
Voltage 240 V	-	х

ROTARY HAMMER WITH SDS MAX GBH 8-45 DV Professional



Technical data		
Part number	0 611 265	
Rated input power	1,500 W	
Impact energy	12,5 J	
Rated speed	0 – 305 rpm	
Impact rate at rated speed	1.380 - 2.760 bpm	
Drilling dia. concrete, hammer drill bits	12 – 45 mm	
Vibration level (drilling/chiselling)	8,0/7,0 m/s ²	
Tool holder	SDS max	
Weight	8.9 kg	
Comes complete with	060	070
Auxiliary handle (spare part number 1 612 025 004)	х	x
Carrying case (spare part number 1 615 438 51A)	x	x
Grease tube (spare part number 1 615 430 010)	x	x
Machine cloth	х	х
Voltage 110 V	x	-
Voltage 240 V	-	x

ROTARY HAMMER WITH SDS MAX GBH 12-52 D Professional



ROTARY HAMMER WITH SDS MAX, DUST EXTRACTIONS WITH SDS MAX

ROTARY HAMMER WITH SDS MAX GBH 12-52 DV Professional





0 611 266	
1,700 W	
19 J	
0 – 220 rpm	
1.750 - 2.150 bpm	
12 – 52 mm	
10,0/8,0 m/s ²	
SDS max	
11.9 kg	
060	070
x	х
x	x
x x	x x
x	x
	1,700 W 19 J 0 - 220 rpm 1.750 - 2.150 bpm 12 - 52 mm 10.0/8.0 m/s ² SDS max 11.9 kg 060

DUST EXTRACTION WITH SDS	MAX
GDE 68 Professional	



Part number	1 600 A00
Compatible with	all drilling tools
Drilling diameter	max. 68 mm
Weight	325 g
Comes complete with	1G7
Cardboard box	x

DUST EXTRACTION WITH SDS MAX GDE 162 Professional

Technical data Part number	1 600 A00
Compatible with Drilling diameter	all drilling tools max. 162 mm
Weight	500 g
Comes complete with	1G8
Cardboard box	x



DEMOLITION HAMMERS WITH SDS PLUS / SDS MAX

Developed for the toughest chiselling applications in concrete and stone, Bosch demolition hammers set standards with regard to performance and sturdiness. For more comfort during continuous use – Bosch Vibration Control.



GSH 7 VC Professional

(see page 115)

- Perfect power-to-weight ratio for performing a variety of SDS max demolition tasks
- ► Durable due to robust metal components
- Powerful motor enables the delivery of 13 J of impact energy for fast chiselling and high removal rate

DEMOLITION HAMMERS WITH SDS PLUS / SDS MAX

DEMOLITION HAMMER WITH SDS MAX GSH 5 Professional



Part number	0 611 338	
Rated input power	1100 W	
Impact energy	7.8 J	
Impact rate at rated speed	2900 bpm	
Comes complete with	770	
Carrying case	х	
1 x pointed chisel, SDS max, 280 mm (1 618 600 023)	x	
Auxiliary handle (2 602 025 142)	x	
Voltage: 240 V	х	

DEMOLITION HAMMER WITH SDS MAX GSH 5 CE Professional



0 611 321	
1,150 W	
2 - 8,3 J	
1.300 - 2.900 bpm	
11,0 m/s²	
SDS max	
6.2 kg	
060	070
х	х
x	x
x	x
х	х
х	x
х	-
-	х
	1,150 W 2 - 8,3 J 1.300 - 2.900 bpm 11,0 m/s ² SDS max 6.2 kg 060 x x x x x x x x

DEMOLITION HAMMER WITH SDS MAX GSH 7 VC Professional



Technical data							
Part number	0 611 322						
Rated input power	1,500 W						
Impact energy	13 J						
Impact rate at rated speed	2.720 bpm						
Vibration level (drilling/chiselling)	9,5 m/s ²						
Tool holder	SDS max						
Weight	8.5 kg						
Comes complete with	060	070					
1 x pointed chisel, SDS max, RTec Speed, 400 mm (2 608 690 167)	х	х					
Auxiliary handle	x	x					
Carrying case (spare part number 1 615 438 51A)	x	x					
Grease tube (spare part number 1 615 430 010)	x	х					
Machine cloth	x	x					
Voltage 110 V	x	-					
Voltage 240 V	- x						

DEMOLITION HAMMER WITH SDS MAX GSH 11 E Professional



Technical data		
Part number	0 611 316	
Rated input power	1,500 W	
Impact energy	16,8 J	
Impact rate at rated speed	900 - 1.890 bpm	
Vibration level (drilling/chiselling)	18,5 m/s²	
Tool holder	SDS max	
Weight	10.1 kg	
Comes complete with	741	742
1 x flat chisel, SDS max, RTec Sharp, 400 mm (2 608 690 124)	х	х
Auxiliary handle (2 602 025 076)	x	х
Carrying case (2 605 438 297)	x	x
Grease tube (spare part number 1 615 430 010)	х	х
Machine cloth	х	х
Voltage 110 V	х	-
Voltage 240 V	-	х

DEMOLITION HAMMER WITH SDS PLUS / SDS MAX, DUST EXTRACTION SYSTEM DEMOLITION HAMMER

DEMOLITION HAMMER WITH SDS MAX GSH 11 VC Professional DUST EXTRACTION SYSTEM DEMOLITION HAMMER GDE max Professional



Technical data		
Part number	0 611 336	
Rated input power	1,700 W	
Impact energy	23 J	
Impact rate at rated speed	900 – 1.700 bpm	
Vibration level (drilling/chiselling)	8,0 m/s ²	
Tool holder	SDS max	
Weight	11.4 kg	
Comes complete with	060	070
1 x pointed chisel, SDS max, RTec Speed, 400 mm (2 608 690 167)	x	x
Carrying case (spare part number 1 615 438 492)	x	x
Grease tube (spare part number 1 615 430 010)	х	х
Machine cloth	х	х
Voltage 110 V	х	-
Voltage 240 V	-	x

	0
Technical data	
Part number	1 600 A00
Compatible with	all current Bosch SDS max rotary and demolition hammers
Weight	750 g
Comes complete with	1G9
Cardboard box	x



BREAKERS

Breakers from Bosch impress with their high material removal rate. Vibration Control allows for a longer operating time and greater comfort.



GSH 27 VC Professional

(see page 118)


- ► 62 J of impact energy for the highest demolition power possible within the Bosch range
- ► Highly durable due to extremely robust metal components
- Vibration Control for comfortable handling and reduced user fatigue in time-intensive applications

BREAKERS, DUST EXTRACTION SYSTEM BREAKER

BREAKER GSH 16-28 Professional			BREAKER GSH 27 VC Professional								
	4	?									
Technical data	,		Technical data	,							
Part number	0 611 335		Part number	0 611 30A							
Rated input power	1.750 W		Rated input power	2.000 W							
Impact energy	41 J		Impact energy	62 J							
mpact rate at rated speed	1.300 bpm		Impact rate at rated speed	1.000 bpm							
/ibration level (drilling/chiselling)	13,0 m/s ²		Vibration level (drilling/chiselling)	8,5 m/s ²							
Fool holder	28 mm internal he	exagon	Tool holder	28 mm internal h	exagon						
Weight	17.9 kg	-	Weight	29.5 kg							
Comes complete with	060	070	Comes complete with	060	070						
	х	х	Voltage 110 V	x	-						
2 608 690 106)			Voltage 240 V	-	х						
Carrying case (1 615 438 432)	x	x									
Carrying handle	x	x									
Grease tube (spare part number 1 615 430 010)	x	х									
Achine cloth	x	x									
/oltage 110 V	x	-									
/oltage 240 V	-	x									

DUST EXTRACTION SYSTEM BREAKER GDE hex Professional



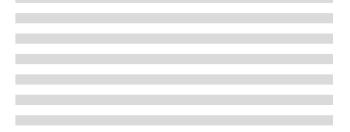






Т

					1															\neg	
																				-	
				+																	
					1															-	
																				-	
	+				+															\neg	
		-			1															\neg	_
	+			-	1															\neg	
				-	1															-	
		+			1															\neg	
	+				+															\neg	
		-			1															\neg	
	+			-	1															\neg	
	\neg			-	1															\neg	
	-				1															-	
				1																	
				-	1																_
				+													 				_
																				\neg	
																				-	
				1																	
				1																-	
																				_	
																				\neg	
																				\neg	
																				_	
					1															\neg	
					1															\neg	
																				\neg	
	\top				1															\neg	
																				-	
																				_	
																				-	
				+													 			\neg	
			1		1																\rightarrow





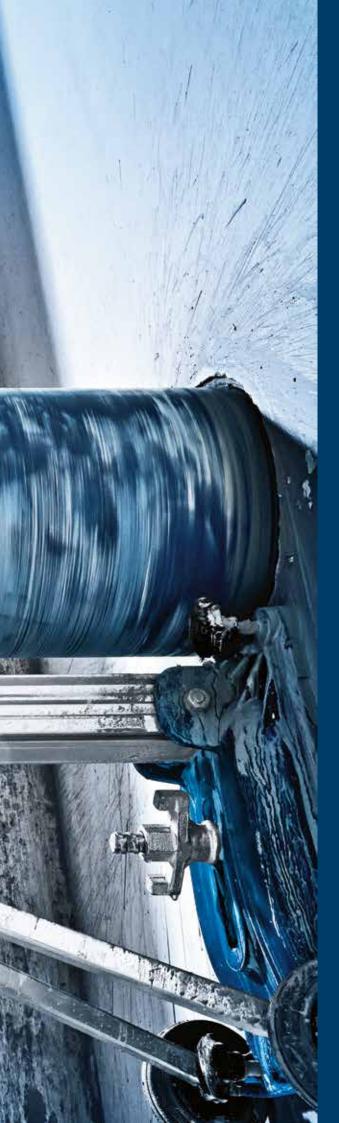

DIAMOND TECHNOLOGY

Bosch power tools with diamond technology offer everything you need to get through thick and thin. Whether wet or dry drilling, concrete grinding, or cutting grooves or slots in concrete, masonry and stone.

Summary of contents123Concrete grinder

DIAMOND TECHNOLOGY



CONCRETE GRINDERS, WALL CHASERS AND DIAMOND TILE CUTTERS

Clean grinding with the concrete grinder from Bosch: The patented dustproof system ensures an unrivalled lifetime.



GBR 15 CAG Professional

(see page 123)

- ► High-powered 1,500 W motor enables a fast work progress even under load
- ► Ergonomically shaped grip and a low tool weight for comfortable handling
- Movable protective guard section for grinding close to edges

DIAMOND TECHNOLOGIES

CONCRETE GRINDER

CONCRETE GRINDER GBR 15 CAG Professional







Tradesmen know that working with wood requires both power and precision – and woodworking tools by Bosch Professional are designed to give you both.

	Summary of contents
128	Random orbit sanders
130	Orbital sanders
132	Routers
133	Multifunction router
133	Cordless palm router
133	Palm routers
134	Plunge unit
137	Cordless multi-cutters
138	Multi-cutters
139	Cordless planer
140	Planers



BELT SANDERS, RANDOM ORBIT SANDERS AND ORBITAL SANDERS

With a Bosch random orbit sander, you will achieve the best results on different surfaces such as wood, metal or plastic. These handy tools are suitable both for sanding and polishing – even on curved surfaces.



GEX 34-150 Professional

(see page 128)

- Constant speed and high removal rate for efficient results even on demanding surfaces
- Aluminium bearing flange ensures a long tool lifetime and makes it ideal for use on tough applications
- Speed preselection option enables use in multimaterial applications

7

RANDOM ORBIT SANDERS



RANDOM ORBIT SANDER GEX 125-1 AE Professional





Technical data	
Part number	0 601 387
Rated input power	250 W
No-load speed	7.500 – 12.000 rpm
Sanding pad diameter	125 mm
Orbit diameter	2.5 mm
Orbital stroke rate	15.000 - 24.000 opm
Sanding sheet / disc attachment	Hook-and-loop fastening
Eccentricity	1.25 mm
Weight	1.3 kg
Comes complete with	571
Carrying case	x
Microfilter box (spare part number 2 609 199 133)	x
Sanding paper K80 (2 609 170 090)	x
Voltage 240 V	x

RANDOM ORBIT SANDER GEX 125-150 AVE Professional



RANDOM ORBIT SANDERS



ß

RANDOM ORBIT SANDER GEX 150 AC Professional



Part number	0 601 372	
Rated input power	340 W	
No-load speed	4.500 - 12.000	rpm
Sanding pad diameter	150 mm	
Orbit diameter	4.0 mm	
Orbital stroke rate	9.000 - 24.000	opm
Sanding sheet / disc attachment	Hook-and-loop f	astening
Eccentricity	2.00 mm	
Weight	2.1 kg	
Comes complete with	770	771
Adapter (2 600 306 007)	х	х
Sanding paper K120 (2 608 607 424)	х	x
Voltage 240 V	-	x

RANDOM ORBIT SANDER GEX 150 Turbo Professional



CORDLESS ORBITAL SANDER, ORBITAL SANDERS

CORDLESS ORBITAL SANDER GSS 18V-10 Professional





Technical data			
Part number	0 601 9D0		
Battery voltage	18 V		
No-load orbital stroke rate	11.000 - 22.000) opm	
Orbit diameter	1.6 mm		
Sanding plate, width	113 mm		
Sanding plate, length	101 mm		
Comes complete with	200	202	270
1 x sanding sheet C470, Best for Wood + Paint, 120 (available separately as set of 10: 2 608 607 232)	-	x	x
1 x sanding sheet C470, Best for Wood + Paint, 120 (available separately as set of 10: 2 608 607 458)	x	x	x
1 x sanding sheet C470, Best for Wood + Paint, 120 (available separately as set of 10: 2 608 608 Z96)	-	x	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	x
Base plate, 113 x 101 mm (2 608 601 446) with sanding plate (2 608 601 443)	x	x	x
Base plate, 80 x 130 mm (2 608 601 447) with sanding plate (2 608 601 444)	-	x	x
Cardboard box	x	-	-
Delta base plate, 100 x 150 mm (2 608 601 448) with sanding plate (2 608 601 445)	-	x	x
Hole punch (2 608 190 059)	x	x	x
L-BOXX 136 (1 600 A01 2G0)	-	x	х
L-BOXX inlay	-	x	х
Microfilter box	x	x	х
Quick charger AL 1860 CV (2 607 225 324)	-	-	х
Sanding paper G120	x	-	-
Screwdriver	-	x	x

ORBITAL SANDER GSS 140-1 A Professional





recillical uata		
Part number	0 601 2A2	
Rated input power	180 W	
No-load speed	12.000 rpm	
No-load orbital stroke rate	24.000 opm	
Orbit diameter	1.6 mm	
Sanding plate, width	113 mm	
Sanding plate, length	101 mm	
Weight	1.2 kg	
Comes complete with	160	170
1 x sanding sheet C470, Best for Wood + Paint, 120 (available separately as set of 10: 2 608 607 458)	x	x
Base plate, 113 x 101 mm (2 608 601 446) with sanding plate (2 608 601 443)	x	x
Cardboard box	x	x
Dust box (2 605 411 240) incl. Microfilter (2 605 411 241)	x	x
Hole punch (2 608 190 059)	x	x
Sanding paper 120 K	x	х
Voltage 110 V	x	-
Voltage 240 V	-	х

ORBITAL SANDER GSS 160-1 A Professional

Technical data		
Part number	0 601 2A2	
Rated input power	180 W	
No-load speed	12.000 rpm	
No-load orbital stroke rate	24.000 opm	
Orbit diameter	1.6 mm	
Sanding plate, width	80 mm	
Sanding plate, length	130 mm	
Weight	1.2 kg	
Comes complete with	260	270
1 x sanding sheet C470, Best for Wood + Paint, 120 (available separately as set of 10: 2 608 607 232)	x	x
Base plate, 80 x 130 mm (2 608 601 447) with sanding plate (2 608 601 444)	x	х
Dust box (2 605 411 240) incl. Microfilter (2 605 411 241)	x	х
Voltage 110 V	x	-
Voltage 240 V	-	х

ORBITAL SANDERS

ORBITAL SANDER

GSS 160 Multi Professional



Technical data	
Part number	0 601 2A2
Rated input power	180 W
No-load speed	12.000 rpm
No-load orbital stroke rate	24.000 opm
Orbit diameter	1.6 mm
Sanding plate, width	100 mm
Sanding plate, length	150 mm
Weight	1.2 kg
Comes complete with	370
1 x sanding sheet C470, Best for Wood + Paint, 120 (available separately as set of 10: 2 608 607 232)	x
1 x sanding sheet C470, Best for Wood + Paint, 120 (available separately as set of 10: 2 608 607 458)	x
1 x sanding sheet C470, Best for Wood + Paint, 120 (available separately as set of 10: 2 608 608 Z96)	x
Base plate, 113 x 101 mm (2 608 601 446) with sanding plate (2 608 601 443)	X
Base plate, 80 x 130 mm (2 608 601 447) with sanding plate (2 608 601 444)	X
Delta base plate, 100 x 150 mm (2 608 601 448) with sanding plate (2 608 601 445)	x
Dust box (2 605 411 240) incl. Microfilter (2 605 411 241)	X
Hole punch (2 608 190 059)	x
L-BOXX 136 (1 600 A01 2G0)	x
L-BOXX inlay	x
Screwdriver	x
Voltage 240 V	x

ORBITAL SANDER GSS 23 AE Professional



rechnical data	
Part number	0 601 070
Rated input power	190 W
No-load speed	7.000 – 12.000 rpm
No-load orbital stroke rate	14.000 - 24.000 opm
Orbit diameter	2.0 mm
Sanding plate, width	92 mm
Sanding plate, length	182 mm
Weight	1.7 kg
Comes complete with	770
2 sheets of sanding paper	х
Hole punch (2 608 190 016)	x
Microfilter box	х
Voltage 240 V	х

ORBITAL SANDER GSS 280 AVE Professional

Technical data Part number 0 601 292 Rated input power 350 W No-load speed 8.000 - 11.000 rpm No-load orbital stroke rate 16.000 - 22.000 opm Orbit diameter 2.4 mm Sanding plate, width 114 mm Sanding plate, length 226 mm Weight 2.7 kg Comes complete with 970 1 x sanding sheet C470, Best for Wood + Paint, x 2 608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 2 608 605 269)		
Rated input power 350 W No-load speed 8.000 - 11.000 rpm No-load orbital stroke rate 16.000 - 22.000 opm Orbit diameter 2.4 mm Sanding plate, width 114 mm Sanding plate, length 226 mm Weight 2.7 kg Comes complete with 970 1 x sanding sheet C470, Best for Wood + Paint, x 2608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x x 180 (available separately as set of 10: 2 608 605 269) x 1 x sanding sheet C470, Best for Wood + Paint, x x 180 (available separately as set of 10: 2 608 605 269) x	Technical data	
No-load speed 8.000 - 11.000 rpm No-load orbital stroke rate 16.000 - 22.000 opm Orbit diameter 2.4 mm Sanding plate, width 114 mm Sanding plate, wight 226 mm Weight 2.7 kg Comes complete with970 1 x sanding sheet C470, Best for Wood + Paint, x 120 (available separately as set of 10: 2 608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10: 2 608 605 269)		
No-load orbital stroke rate 16.000 - 22.000 opm Orbit diameter 2.4 mm Sanding plate, width 114 mm Sanding plate, length 226 mm Weight 2.7 kg Comes complete with 970 1 x sanding sheet C470, Best for Wood + Paint, x 2608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x x 260 8 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 180 (available separately as set of 10: 2 608 605 269) x 1 x sanding sheet C470, Best for Wood + Paint, x x 260 8 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10: 2 608 605 269) x	and the second	
Orbit diameter 2.4 mm Sanding plate, width 114 mm Sanding plate, length 226 mm Weight 2.7 kg Comes complete with		
Sanding plate, width 114 mm Sanding plate, length 226 mm Weight 2.7 kg Comes complete with 970 1 x sanding sheet C470, Best for Wood + Paint, x 20 (available separately as set of 10: 2 608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x 180 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x x 80 (available separately as set of 10: 2 608 605 269) x		
Sanding plate, length 226 mm Weight 2.7 kg Comes complete with 970 1 x sanding sheet C470, Best for Wood + Paint, x 120 (available separately as set of 10: 2 608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x 180 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10: 2 608 605 269)		
Weight 2.7 kg Comes complete with 970 1 x sanding sheet C470, Best for Wood + Paint, x 120 (available separately as set of 10: 2 608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x 180 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10: 2 608 605 269)		
Comes complete with 970 1 x sanding sheet C470, Best for Wood + Paint, x 120 (available separately as set of 10: 2 608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x 180 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 180 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10: 2 608 605 269)		
1 x sanding sheet C470, Best for Wood + Paint, x 120 (available separately as set of 10: 2 608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x 180 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10: 50 (available separately as set of 10:		
120 (available separately as set of 10: 2 608 605 268) 1 x sanding sheet C470, Best for Wood + Paint, x 180 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10:		
180 (available separately as set of 10: 2 608 605 269) 1 x sanding sheet C470, Best for Wood + Paint, x 80 (available separately as set of 10:	120 (available separately as set of 10:	x
80 (available separately as set of 10:	180 (available separately as set of 10:	x
	80 (available separately as set of 10:	x
Auxiliary handle (2 602 026 175) x	Auxiliary handle (2 602 026 175)	х
L-BOXX 238 (1 600 A01 2G2) x	L-BOXX 238 (1 600 A01 2G2)	x
Voltage 240 V x	Voltage 240 V	x



ROUTERS, PALM ROUTERS AND BISCUIT JOINTER

Bosch routers set standards in precision and are truly multi-talented tools: Their applications range from exact groove, edge and copy routing through to benchtop work. All different kinds of materials can easily be processed with an extremely high level of convenience and precision.



GOF 1250 LCE Professional

(see page 132)

 Ergonomic handle designed for various comfortable grip positions and excellent tool control 7

- Patented 1/10-mm fine adjustment steps and digital display ensure depth regulation with optimal precision
- Unique Spindle Lock system enables fast accessory changes

Professional Power Tools for Trade & Industry | 131

ROUTERS



х

-

х

ROUTER GOF 1250 LCE Professional





Technical data	
Part number	0 601 626
Rated input power	1,250 W
No-load speed	10.000 – 24.000 rpm
Bit holder	6 – 8,0 mm
Maximum router cage stroke	60 mm
Template guide diameter	17.0 mm
Collet diameter	8.0 mm
Weight	3.6 kg
Comes complete with	171
Collet with nut 8 mm (2 608 570 102)	х
L-BOXX 238 (1 600 A01 2G2)	х
Open-ended spanner 19 mm (spare part number 1 907 950 511)	X
Parallel guide with fine adjustment (2 607 001 387)	x
Template guide adapter (spare part number 2 610 991 370)	х
Voltage 240 V	x

ROUTER GOF 1600 CE Professional



Technical data	
Part number	0 601 624
Rated input power	1,600 W
No-load speed	10.000 – 25.000 rpm
Bit holder	8 – 12,7 mm
Maximum router cage stroke	76 mm
Weight	5.8 kg
Comes complete with	070
2 x collet with nut 1/4" (2 608 570 104) + 1/2" (2 608 570 108)	x
2 x template guide 17mm (2 609 200 139) + 30 mm (2 609 200 142)	x
Centring pin combined 1/4" / 1/2"	х
Dust extraction adapter for plunge-cutting router	x
Open-ended spanner	х
Parallel guide with fine adjustment	x
Template guide adapter	х
Voltage 110 V	-
Voltage 240 V	х

ROUTER OFZ Professional

•	
Technical data	
Part number	1 600 A00
Weight	0.1 kg
Comes complete with	11C
Cardboard box	х

Voltage 110 V

Voltage 240 V

MULTIFUNCTION ROUTER, CORDLESS PALM ROUTER, PALM ROUTERS

MULTIFUNCTION ROUTER GMF 1600 CE Professional





Technical data	
Part number	0 601 624
Rated input power	1,600 W
No-load speed	10.000 – 25.000 rpm
Bit holder	8 – 12,0 mm
Maximum router cage stroke	76 mm
Comes complete with	072
2 x collet with nut 1/4" (2 608 570 104) + 1/2" (2 608 570 108)	х
2 x template guide 17mm (2 609 200 139) + 30 mm (2 609 200 142)	х
Centring pin 8 mm/12 mm	x
Open-ended spanner	x
Parallel guide with fine adjustment	x
Template guide adapter	x
Voltage 240 V	x



CORDLESS PALM ROUTER




Technical data				
Part number	0 601 6B0			
Battery voltage	12 V			
No-load speed	13.000 rpm	13.000 rpm		
Compatible collet diameters	6 mm / 8 mm	/ 1/4"		
Weight excl. battery	1.1 kg			
Comes complete with	070	071	072	
2 x battery GBA 12V 3.0Ah (1 600 A00 X79)	х	-	-	
Collet with nut 1/4" (1 600 A00 H85)	x	х	x	
L-BOXX 136 (1 600 A01 2G0)	x	-	-	
Open-ended spanner 17 mm (spare part number 2 609 110 438)	x	x	x	
Quick charger GAL 1230 CV (1 600 A01 16B)	х	-	-	

PALM ROUTER GKF 600 Professional



PALM ROUTER GKF 1600 Professional



lechnical data		
Part number	0 601 60A	
Rated input power	600 W	
No-load speed	33.000 rpm	
Compatible collet diameters	6.35 mm	
Weight	1.5 kg	
Comes complete with	161	171
Carrying case (2 609 100 302)	-	-
Collet with nut 1/4" (2 608 570 135)	-	х
Open-ended spanner 17 mm (spare part number 2 609 110 438)	-	-
Parallel guide (2 608 000 331)	-	-
Pilot (2 608 000 332)	-	-
Voltage 110 V	x	-
Voltage 240 V	-	x

PLUNGE UNIT

PLUNGE UNIT TE 600 Professional

Technical data



Part number	0 601 60A
Positioning	TE 600, the compact plunge unit for the GKF 600 Professional
User benefit incl. Reason to believe	The TE 600 transforms the GKF 600 into a small, compact plunge-cutting router
Comes complete with	800
Cardboard box	X



MULTI-CUTTERS AND MULTI ROTARY TOOLS

Bosch multi-cutters enable perfect trimming, adjustment and repairs. The comprehensive range of accessories offers you an endless range of applications.



GOP 55-36 Professional

7

(see page 138)

- ► 550 W motor and superior Starlock interface with optimised 3-dimensional tight fit for best power transfer
- ► Highly durable due to robust metal components
- Snap-in function enables fast and easy tool accessory changes

CORDLESS MULTI-CUTTERS

CORDLESS MULTI-CUTTER GRO 12V-35 Professional





5.000 - 35.000 rpm	
	070
х	
x	
x	
х	
х	
-	
x	
х	
x	
х	
х	
x	
	x

CORDLESS MULTI-CUTTER GOP 12V-28 Professional



Technical data			
Part number	0 601 8B5		
Battery voltage	12 V		
No-load rotation	5.000 - 20.000	opm	
Oscillation angle on left and right	1.4 °		
Comes complete with	001	002	070
1 x Starlock BIM plunge cut saw blade All 65 APB, Curved-Tec, Wood + Metal (2 608 661 781)	-	-	x
1 x Starlock BIM plunge cut saw blade All 65 BSPB, Curved-Tec, Hard Wood (2 608 662 017)	-	-	x
1 x Starlock BIM plunge cut saw blade AIZ 20 AB, Wood + Metal (2 608 661 640)	-	-	x
1 x Starlock BIM plunge cut saw blade AIZ 32 APB, Wood + Metal, Curved-Tec (2 608 661 644)	x	x	x
1 x Starlock BIM segment saw blade ACZ 85 EB, Wood + Metal (2 608 661 636)	-	-	x
1 x Starlock delta sanding plate AVZ 93 G (2 608 000 493)	-	-	x
1 x Starlock HCS plunge cut saw blade AIZ 32 EPC, Curved-Tec, Wood (2 608 661 637)	-	-	x
2 x battery GBA 12V 2.5Ah (1 600 A00 4ZL)	-	-	x
5 x sanding sheets, K 2x80, 2x120, 1x240 (2 608 621 104)	-	-	x
Cardboard box	x	-	-
L-BOXX 102 (1 600 A01 2FZ)	-	х	-
L-BOXX 136 (1 600 A01 2G0)	-	-	x
Quick charger GAL 1230 CV (1 600 A01 16B)	-	-	х

CORDLESS MULTI-CUTTER GOP 18V-28 Professional



Technical data		
Part number	0 601 8B6	
Battery voltage	18 V	
No-load rotation	8.000 - 20.000 opm	l i i i i i i i i i i i i i i i i i i i
Oscillation angle on left and right	1.4 °	
Comes complete with	001	002
1 x StarlockPlus BIM plunge cut saw blade PAIZ 32 APB, Curved-Tec, Wood + Metal (2 608 662 558)	x	x
Cardboard box	-	х
L-BOXX 136 (1 600 A01 2G0)	х	-

CORDLESS MULTI-CUTTERS, MULTI-CUTTER

CORDLESS MULTI-CUTTER GOP 18V-28 Professional



Part number	0 601 8B6
Battery voltage	18 V
No-load rotation	8.000 – 20.000 opm
Oscillation angle on left and right	1.4 °
Comes complete with	071
1 x Starlock BIM plunge cut saw blade All 65 APB, Curved-Tec, Wood + Metal (2 608 661 781)	x
1 x Starlock BIM plunge cut saw blade All 65 BSPB, Curved-Tec, Hard Wood (2 608 662 017)	x
1 x Starlock BIM plunge cut saw blade AIZ 20 AB, Wood + Metal (2 608 661 640)	x
1 x Starlock BIM plunge cut saw blade AIZ 32 APB, Wood + Metal, Curved-Tec (2 608 661 644)	x
1 x Starlock BIM segment saw blade ACZ 85 EB, Wood + Metal (2 608 661 636)	x
1 x Starlock Carbide-RIFF sanding plate AVZ 78 RT2, Grout + Abrasive (2 608 661 648)	x
1 x Starlock Carbide-RIFF segment saw blade ACZ 85 RT3, Grout + Abrasive (2 608 661 642)	X
1 x Starlock delta sanding plate AVZ 93 G (2 608 000 493)	X
1 x StarlockPlus BIM plunge cut saw blade PAII 65 APB, Curved-Tec, Wood + Metal (2 608 662 564)	x
1 x StarlockPlus BIM plunge cut saw blade PAIZ 32 APB, Curved-Tec, Wood + Metal (2 608 662 558)	x
1 x StarlockPlus Carbide plunge cut saw blade PAIZ 32 AT, Metal (2 608 662 555)	x
2 x battery GBA 18V 2.0Ah (1 600 Z00 036)	-
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	x
5 x sanding sheets, K 2x80, 2x120, 1x240 (2 608 621 104)	x
L-BOXX 136 (1 600 A01 2G0)	x
Quick charger AL 1860 CV (2 607 225 324)	x

MULTI-CUTTER GOP 30-28 Professional

B





Technical data				
Part number	0 601 237 .			
Rated input power	300 W			
No-load oscillation	8.000 - 20.	000 opm		
Oscillation angle on left and right	1.4 °			
Weight	1.5 kg			
Comes complete with	060	061	070	071
1 x Starlock BIM plunge cut saw blade All 65 APB, Curved-Tec, Wood + Metal (2 608 661 781)	x	-	x	-
1 x Starlock BIM plunge cut saw blade All 65 BSPB, Curved-Tec, Hard Wood (2 608 662 017)	x	-	x	-
1 x Starlock BIM plunge cut saw blade AIZ 20 AB, Wood + Metal (2 608 661 640)	x	-	x	-
1 x Starlock BIM plunge cut saw blade AIZ 32 APB, Wood + Metal, Curved-Tec (2 608 661 644)	x	-	x	-
1 x Starlock BIM segment saw blade ACZ 85 EB, Wood + Metal (2 608 661 636)	x	-	x	-
1 x Starlock Carbide-RIFF sanding plate AVZ 78 RT2, Grout + Abrasive (2 608 661 648)	x	-	x	-
1 x Starlock Carbide-RIFF segment saw blade ACZ 85 RT3, Grout + Abrasive (2 608 661 642)	x	-	x	-
1 x Starlock delta sanding plate AVZ 93 G (2 608 000 493)	x	-	x	-
1 x StarlockPlus BIM plunge cut saw blade PAII 65 APB, Curved-Tec, Wood + Metal (2 608 662 564)	x	-	x	-
1 x StarlockPlus BIM plunge cut saw blade PAIZ 32 APB, Curved-Tec, Wood + Metal (2 608 662 558)	x	x	x	x
1 x StarlockPlus Carbide plunge cut saw blade PAIZ 32 AT, Metal (2 608 662 555)	x	-	x	-
5 x sanding sheets, K 2x80, 2x120, 1x240 (2 608 621 104)	x	-	x	-
Cardboard box	-	х	-	х
L-BOXX 136 (1 600 A01 2G0)	х	-	х	-
Voltage 110 V	x	х	-	-
Voltage 240 V			x	х

MULTI-CUTTERS

MULTI-CUTTER

GOP 40-30 Professional



Technical data				
Part number	0 601 231 .			
Rated input power	400 W			
No-load oscillation	8.000 - 20.	000 opm		
Oscillation angle on left and right	1.5 °			
Weight	1.5 kg			
Comes complete with	060	061	070	071
1 x Starlock BIM plunge cut saw blade All 65 APB, Curved-Tec, Wood + Metal (2 608 661 781)	-	x	-	x
1 x Starlock BIM plunge cut saw blade All 65 BSPB, Curved-Tec, Hard Wood (2 608 662 017)	-	x	-	х
1 x Starlock BIM plunge cut saw blade AIZ 20 AB, Wood + Metal (2 608 661 640)	-	x	-	x
1 x Starlock BIM plunge cut saw blade AIZ 32 APB, Wood + Metal, Curved-Tec (2 608 661 644)	-	x	-	x
1 x Starlock BIM segment saw blade ACZ 100 BB, Wood + Metal (2 608 661 633)	-	x	-	x
1 x Starlock Carbide-RIFF sanding plate AVZ 78 RT2, Grout + Abrasive (2 608 661 648)	-	x	-	x
1 x Starlock Carbide-RIFF segment saw blade ACZ 85 RT3, Grout + Abrasive (2 608 661 642)	-	x	-	x
1 x Starlock delta sanding plate AVZ 93 G (2 608 000 493)	-	x	-	x
1 x StarlockPlus BIM plunge cut saw blade PAII 65 APB, Curved-Tec, Wood + Metal (2 608 662 564)	-	х	-	x
1 x StarlockPlus BIM plunge cut saw blade PAIZ 32 APB, Curved-Tec, Wood + Metal (2 608 662 558)	x	x	x	x
1 x StarlockPlus Carbide plunge cut saw blade PAIZ 32 AT, Metal (2 608 662 555)	-	x	-	x
5 x sanding sheets, K 2x80, 2x120, 1x240 (2 608 621 104)	-	x	-	x
Cardboard box	х	-	х	-
L-BOXX 136 (1 600 A01 2G0)	-	х	-	х
Voltage 110 V	х	х	-	-
Voltage 240 V	-	-	х	х

MULTI-CUTTER GOP 55-36 Professional



Technical data				
Part number	0 601 231 .			
Rated input power	550 W			
No-load oscillation	8.000 - 20.	000 opm		
Oscillation angle on left and right	1.8 °			
Weight	1.6 kg			
Comes complete with	160	161	170	171
1 x Starlock BIM segment saw blade ACZ 100 BB, Wood + Metal (2 608 661 633)	-	x	-	х
1 x Starlock Carbide-RIFF sanding plate AVZ 78 RT2, Grout + Abrasive (2 608 661 648)	-	x	-	x
1 x Starlock Carbide-RIFF segment saw blade ACZ 85 RT3, Grout + Abrasive (2 608 661 642)	-	x	-	x
1 x Starlock delta sanding plate AVZ 93 G (2 608 000 493)	-	x	-	x
1 x StarlockMax BIM plunge cut saw blade MAII 52 APB, Curved-Tec, Wood + Metal (2 608 662 574)	-	x	-	x
1 x StarlockMax BIM plunge cut saw blade MAIZ 32 APB, Curved-Tec, Wood + Metal (2 608 662 571)	x	x	x	x
1 x StarlockMax Carbide plunge cut saw blade MAIZ 32 AT, Metal (2 608 662 567)	-	x	-	x
1 x StarlockMax Carbide-RIFF plunge cut saw blade MATI 68 RT3, Grout + Abrasive (2 608 662 577)	-	x	-	x
1 x StarlockMax HCS plunge cut saw blade MAII 32 SC, Multi Material (2 608 662 583)	-	x	-	x
1 x StarlockMax HCS plunge cut saw blade MAIZ 32 EPC, Curved-Tec, Wood (2 608 662 568)	-	x	-	x
25 x sanding sheet, K 10x80, 10x120, 5x240 (2 608 621 105)	-	x	-	x
Cardboard box	х	-	х	-
L-BOXX 136 (1 600 A01 2G0)	-	x	-	x
Starlock vacuum adapter with clamping neck (2 608 000 636)	-	x	-	x
Voltage 110 V	x	x	-	-
Voltage 240 V	-	-	x	x



PLANERS

Planers from Bosch are particularly powerful and impress with their precision. The patented Wood Razor single-blade system impresses with extreme blade sharpness and allows for fast blade changes without time-consuming fine adjustment.

CORI	DLESS PL	ANER
GHO	12V-20 P	rofessiona



PLANER GHO 16-82 Professional



7

PLANERS

PLANER GHO 26-82 D Professional



Technical data			
Part number	0 601 5A4		
Rated input power	710 W		
No-load speed	18,000 rpm		
Planing width	82 mm		
Planing depth	2,6 mm		
Adjustable rebating depth	9 mm		
Weight	2.8 kg		
Comes complete with	360	370	
Carrying case	х	х	
Fabric dust bag	х	х	
Hex key WAF 2.5 (spare part number 1 907 950 003)	x	x	
Parallel guide	х	х	
Voltage 110 V	x	-	
Voltage 240 V	-	х	

PLANER GHO 40-82 C Professional





Technical data	
Part number	0 601 59A
Rated input power	850 W
No-load speed	14,000 rpm
Planing width	82 mm
Planing depth	0 – 4 mm
Adjustable rebating depth	0 – 24 mm
Weight	3.2 kg
Comes complete with	762
1 x planer blade, 82 x 5.5 x 1.1 mm (2 608 635 376)	x
Carrying case (2 605 438 567)	х
Dust bag (2 605 411 035)	х
Parallel guide (2 607 000 102)	х
Rebating depth guide (1 608 132 006)	х
Voltage 240 V	х





	_	_	 	 	 		 					 			 	 		 		 		 		_	_
	-	-		_																					+
	_			 									 							 					_
	_			 																 				_	
		-		 _										_						 					_
		-		_																			_		_
	_	_																					 		_
		<u> </u>																							
		+		 _					 				 	_					_	 	_				_
	_			 																 				_	
		_																							_
	-	-		 _									 												_
		-		_										_							_		_		_
	_			 																 				_	
																									_
	-																								
	-	-																							
		-		 																					
	_			 																				_	_
	_			 																 					
	+	1																						-	







SAWS

Bosch Professional saws offer you the power and control to make an accurate cut every time – and the perfect handling and ergonomics to work in any position.

	Summary of contents
145	Cordless jigsaws
146	Jigsaws
147	Foam rubber cutter
150	Reciprocating saws
150	Cordless band saw
153	Cordless hand-held circular saws
155	Hand-held circular saws
155	Plunge saws
157	Parallel guide
158	Guide rails
158	System package
158	Clamp
158	Adapter
159	Jigsaw adapters





JIGSAWS

Bosch developed the first jigsaw – and has since reinvented it over and over again. Regardless of whether you need a tool for precise sawing at accurate angles or for robust use, Bosch offers professionals the right jigsaw for every application.



GST 18 V-LI B Professional

(see page 145)

- Bow handle with variable speed trigger provides optimum and easy tool control
- Tool-free Bosch SDS-system makes changing saw blades easy
- ► Strong 18 V performance for fast work progress



CORDLESS JIGSAWS, JIGSAW

CORDLESS JIGSAW GST 12V-70 Professional



Technical data		
Part number	0 601 5A1	
Battery voltage	12 V	
Stroke rate at no load	1.500 - 2.800 spm	
Cutting depth in wood	70 mm	
Mitre cuts	0-45 °	
Comes complete with	001	070
1 x jigsaw blade T 144 D, Speed for Wood (available separately as set of 3: 2 608 630 560)	x	х
1 x jigsaw blade T 308 B, Extra-clean for Wood (available separately as set of 3: 2 608 663 750)	x	х
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	x
Anti-splinter guard	х	х
Cardboard box	х	-
Dust extraction set	х	х
Glide shoe	х	x
L-BOXX 102 (1 600 A01 2FZ)	-	х
L-BOXX inlay	х	x
Quick charger GAL 1230 CV (1 600 A01 16B)	-	x

CORDLESS JIGSAW GST 18 V-LI B Professional



Technical data		
Part number	0 601 5A6	
Battery voltage	18 V	
Stroke rate at no load	0 – 2.700 spm	
Cutting depth in wood	120 mm	
Mitre cuts	0-45 °	
Comes complete with	100	101
1 x jigsaw blade T 144 DP, Precision for Wood (available separately as set of 3: 2 608 633 A31)	x	х
1 x jigsaw blade T 244 D, Speed for Wood (available separately as set of 3: 2 608 630 879)	x	x
1 x jigsaw blade T 308 B, Extraclean for Hard Wood (Part number for 3-piece set 2 608 663 750)	-	-
1 x jigsaw blade T 308 B, Extra-clean for Wood (available separately as set of 3: 2 608 663 750)	x	x
1/1 L-BOXX inlay for tool and charger (1 600 A00 3NH)	x	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-
Cardboard box	х	-
Hood (2 601 016 096)	х	х
L-BOXX 136 (1 600 A01 2G0)	-	х
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-

CORDLESS JIGSAW GST 18 V-LI S Professional





Technical data		
Part number	0 601 5A5	
Battery voltage	18 V	
Stroke rate at no load	550 - 2.700 spm	
Cutting depth in wood	120 mm	
Comes complete with	100	101
1 x jigsaw blade T 144 DP, Precision for Wood (available separately as set of 3: 2 608 633 A31)	x	х
1 x jigsaw blade T 244 D, Speed for Wood (available separately as set of 3: 2 608 630 879)	x	x
1 x jigsaw blade T 308 B, Extraclean for Hard Wood (Part number for 3-piece set 2 608 663 750)	-	-
1 x jigsaw blade T 308 B, Extra-clean for Wood (available separately as set of 3: 2 608 663 750)	x	х
1/1 L-BOXX inlay for tool and charger (1 600 A00 3NH)	x	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-
Cardboard box	x	-
Hood (2 601 016 096)	х	x
L-BOXX 136 (1 600 A01 2G0)	-	х
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-

JIGSAW GST 90 BE Professional





JIGSAWS

JIGSAW GST 150 CE Professional



^part numbe 0 601 512 Rated input power 780 W Cutting depth in wood 150 mm Cutting depth in aluminium 20 mm Cutting depth in non-alloyed steel Comes complete with 10 m ... 070 1 x jigsaw blade T 144 DP, Precision for Wood (available separately as set of 3: 2 608 633 A31) х Dust extraction set (2 605 510 294) х Glide shoe (spare part number 2 601 099 183) х Hood (2 601 016 096) х Hood (spare part number 2 605 510 293) х Suction nozzle (spare part number 2 605 730 055) х Voltage 240 V

х

JIGSAW GST 150 BCE Professional





Part number 0 601 513 Rated input power 780 W Cutting depth in wood 150 mm Cutting depth in aluminum 20 mm Cutting depth in non-alloyed steel 10 mm Comes complete with 060 070 1 x jigsaw blade T 144 DP, Precision for Wood (available separately as set of 3: 2 608 633 A31) x x Dust extraction set (2 605 510 294) x x x Glide shoe (spare part number 2 601 099 183) x x x Hood (2 601 016 096) x x x Suction nozzle (spare part number 2 605 510 293) x x x Voltage 110 V x x x Voltage 240 V – x x	Technical data		
Cutting depth in akuminium 150 mm Cutting depth in akuminium 20 mm Cutting depth in non-alkoyed steel 10 mm Cutting depth in non-alkoyed steel 10 mm Comes complete with	Part number	0 601 513	
Cutting depth in aluminium 20 mm Cutting depth in non-alloyed steel 10 mm Comes complete with 060 070 1 x jigsaw blade T 144 DP, Precision for Wood x x (available separately as set of 3: 2 608 633 A31) x x Dust extraction set (2 605 510 294) x x Glide shoe (spare part number 2 601 099 183) x x Hood (2 601 016 096) x x Suction nozzle (spare part number 2 605 510 293) x x Suction nozzle (spare part number 2 605 510 293) x x 2 605 730 055) x x Voltage 110 V x -	Rated input power	780 W	
Cutting depth in non-alloyed steel 10 mm Comes complete with 060 070 1 x Jigsaw blade T 144 DP, Precision for Wood (available separately as set of 3: 2 608 633 A31) x x Dust extraction set (2 605 510 294) x x Glide shoe (spare part number 2 601 099 183) x x Hood (2 601 016 096) x x Suction nozzle (spare part number 2 605 510 293) x x Youting part le (spare part number 2 605 510 293) x x Voltage 110 V x -	Cutting depth in wood	150 mm	
Comes complete with 060 070 1 x jigsaw blade T 144 DP, Precision for Wood (available separately as set of 3: 2 608 633 A31) x x Dust extraction set (2 605 510 294) x x Glide shoe (spare part number 2 601 099 183) x x Hood (2 601 016 096) x x Hood (spare part number 2 605 510 293) x x Suction nozzle (spare part number 2 605 730 055) x x Voltage 110 V x -	Cutting depth in aluminium	20 mm	
1 x jigsaw blade T 144 DP, Precision for Wood x x x x x x x x x x x x x x x x x x	Cutting depth in non-alloyed steel	10 mm	
(available separately as set of 3: 2 608 633 A31) Dust extraction set (2 605 510 294) x x Glide shoe (spare part number 2 601 099 183) x x Hood (2 601 016 096) x x Suction nozzle (spare part number 2 605 510 293) x x Suction nozzle (spare part number 2 605 510 293) x x 2 605 730 055) x x Voltage 110 V x -	Comes complete with	060	070
Glide shoe (spare part number 2 601 099 183) x x Hood (2 601 016 096) x x Hood (spare part number 2 605 510 293) x x Suction nozzle (spare part number 2 605 730 055) x x Voltage 110 V x -			х
Hood (2 601 016 096) x x Hood (Spare part number 2 605 510 293) x x Suction nozzle (spare part number x x 2 605 730 056) X x Voltage 110 V x -	Dust extraction set (2 605 510 294)	х	х
Hood (spare part number 2 605 510 293) x x Suction nozzle (spare part number x x 2 605 730 055) x -	Glide shoe (spare part number 2 601 099 183)	х	х
Suction nozzle (spare part number x x 2 605 730 055) x -	Hood (2 601 016 096)	х	х
2 605 730 055) Voltage 110 V x -	Hood (spare part number 2 605 510 293)	х	х
		x	x
Voltage 240 V - x	Voltage 110 V	x	-
	Voltage 240 V	-	x
		x -	

JIGSAW GST 160 CE Professional	
Technical data	
Part number	0 601 517
Rated input power	800 W
Cutting depth in wood	160 mm
Cutting depth in aluminium	20 mm
Cutting depth in non-alloyed steel	10 mm
Comes complete with	070
1 x jigsaw blade T 144 DP, Precision for Wood (available separately as set of 3: 2 608 633 A31)	x
1 x jigsaw blade T 244 D, Speed for Wood (available separately as set of 3: 2 608 630 879)	X
1 x jigsaw blade T 308 B, Extra-clean for Wood (available separately as set of 3: 2 608 663 750)	x
1/1 LBOXX inlay for tool (1 600 A00 2UN)	x
Dust extraction adapter	x
Hood (2 601 016 096)	x

х

JIGSAW GST 160 BCE Professional



L-BOXX 136 (1 600 A01 2G0)

Voltage 240 V



FOAM RUBBER CUTTER

FOAM RUBBER CUTTER GSG 300 Professional

Technical data	
Part number	0 601 575
Rated input power	350 W
Stroke rate at no load Cutting depth in foam rubber	3.500 spm 300 mm
Weight	1.6 kg
Comes complete with	142
Saw blade guide not included	X
Saw blade(s) not included	x
Sole plate (2 608 000 908)	x
Voltage 240 V	x
-	





RECIPROCATING SAWS AND BAND SAWS

Bosch reciprocating saws excel due to their robustness and exceptional ease of use. The powerful motor ensures rapid sawing progress – even in the toughest applications.



GSA 18V-32 Professional

(see page 150)

- Unique ergonomic handle shape and extra long switch enables better handling for difficult overhead work or in tight spaces
- ► EC motor, when paired with an 18V Bosch Lithium-Ion Technology battery, delivers corded power with cordless freedom
- ► Lowest vibration to ensure fatigue-free work



CORDLESS RECIPROCATING SAWS

CORDLESS RECIPROCATING SAW

GSA 12V-14 Professional



Technical data	
Part number	0 601 64L
Battery voltage	12 V
Cutting depth in wood	65 mm
Cutting depth in metal profiles and metal pipes	50 mm
Stroke lengths	14.5 mm
Weight excl. battery	1.2 kg
Stroke rate (1st gear / 2nd gear)	0 / 3.000 spm
Comes complete with	902
Cardboard box	х

CORDLESS RECIPROCATING SAW GSA 18 V-LI Professional



Technical data

Part number	0 601 64J
Battery voltage	18 V
Stroke lengths	28 mm
Stroke rate (1st gear / 2nd gear)	2.400 - 2.700 spm
Comes complete with	077
1 x reciprocating saw blade S 123 XF, Progressor for Metal (available separately as set of 2: 2 608 654 416)	x
1 x reciprocating saw blade S 2345 X, Progressor for Wood (available separately as set of 2: 2 608 654 403)	x
1/1 L-BOXX inlay for tool and charger (1 600 A00 2UZ, 1 600 A00 2VF)	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	x
L-BOXX 238 (1 600 A01 2G2)	x
Quick charger GAL 1880 CV (1 600 A00 B8H)	x

CORDLESS RECIPROCATING SAW GSA 18 V-LI Professional



Technical data	
Part number	0 601 64J
Battery voltage	18 V
Stroke lengths	28 mm
Stroke rate (1st gear / 2nd gear)	2.400 - 2.700 spm
Comes complete with	007
1 x reciprocating saw blade S 123 XF, Progressor for Metal (available separately as set of 2: 2 608 654 416)	x
1 x reciprocating saw blade S 2345 X, Progressor for Wood (available separately as set of 2: 2 608 654 403)	x
1/1 L-BOXX inlay for tool and charger (1 600 A00 2UZ, 1 600 A00 2VF)	X
L-BOXX 238 (1 600 A01 2G2)	x

CORDLESS RECIPROCATING SAW GSA 18 V-LI C Professional



0 601 6A5
18 V
21 mm
200 mm
100 mm
0 - 3.050 spm
001
x
x
x
x
x



CORDLESS RECIPROCATING SAW, RECIPROCATING SAWS, CORDLESS BAND SAW

MOTOR

CORDLESS RECIPROCATING SAW GSA 18V-32 Professional

RECIPROCATING SAW GSA 1100 E Professional



Part number	0 601 6A8		
Battery voltage	18 V		
Stroke lengths	32 mm		
Cutting depth in wood	230 mm		
Cutting depth in metal profiles and metal pipes	175 mm		
Weight excl. battery	3.5 kg		
Stroke rate (1st gear / 2nd gear)	0 - 2.500 spm		
Comes complete with	108	109	172
1 x reciprocating saw blade S 1110 VF, Heavy for Wood + Metal (available separately as set of 5: 2 608 657 610)	х	-	-
1 x reciprocating saw blade S 1130 CF, Endurance for Heavy Metal (available separately as set of 5: 2 608 657 528)	-	x	x
1 x reciprocating saw blade S 1156 XHM, Progressor for Wood + Metal (2 608 653 100)	-	-	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	x
Cardboard box	х	-	-
Carrying case	-	x	x
Quick charger GAL 1880 CV (1 600 A00 B8H)	-	-	х
Saw blade box	-	-	х



0 601 64C	
1,100 W	
230 mm	
28 mm	
3.6 kg	
860	870
х	x
x	x
x	x
х	-
-	x
	1,100 W 230 mm 28 mm 3.6 kg 860 x x x x

RECIPROCATING SAW GSA 1300 PCE Professional









HAND-HELD CIRCULAR SAWS AND PLUNGE SAW

Bosch hand-held circular saws are sturdy and durable. Their powerful motors ensure rapid work progress in everyday construction work. You can therefore perform even the most demanding tasks reliably.



GKT 18V-52 GC Professional

(see page 155)

- BITURBO Brushless technology and ProCORE18V for maximum cordless cutting performance equal to corded 1,620 W plunge saws
- Superior mobility due to uniquely compact design allowing operation with only one battery
- ► Very compact design enables minimum distance between saw blade and wall of only 10 mm



reddot award 2014

CORDLESS HAND-HELD CIRCULAR SAWS

CORDLESS HAND-HELD CIRCULAR SAW GKS 12V-26 Professional



Part number	0 601 6A1		
Battery voltage	12 V		
No-load speed	1.400 rpm		
Max. cutting capacity in wood (90°)	26.5 mm		
Max. cutting capacity in wood (45°)	17 mm		
Saw blade diameter	85 mm		
Saw blade bore diameter	15 mm		
Comes complete with	001	002	070
1 x circular saw blade, Standard for Wood, 85 x 15 x 1.1 mm, 20 (2 608 643 071)	x	x	x
1/2 L-BOXX inlay for charger (1 600 A00 2WY)	-	х	x
1/2 L-BOXX inlay for tool (1 600 A00 2WU)	x	x	x
2 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	-	x
Cardboard box	x	-	-
Dust extraction adapter	х	х	х
Hex key	х	х	x
L-BOXX 136 (1 600 A01 2G0)	-	х	x
Parallel guide/guide rail adapter	x	x	x
(1 619 P10 829)			

CORDLESS HAND-HELD CIRCULAR SAW GKS 18V-57 Professional





NEW!

rechnical data	
Part number	0 601 6A2
Battery voltage	18 V
No-load speed	3.400 rpm
Max. cutting capacity in wood (90°)	57 mm
Max. cutting capacity in wood (45°)	39 mm
Saw blade diameter	165 mm
Saw blade bore diameter	20 mm
Comes complete with	200
Cardboard box	x
Dust extraction adapter	х
Internal hexagon	x
Parallel guide	х
Saw blade	x

CORDLESS HAND-HELD CIRCULAR SAW GKS 18V-57 G Professional



GKS 18V-68 GC Professional 9 ()2500-5000 4 G ECO A USER BITURBO 🚳 MOTOR BRUSHLESS Technical data 0 601 6B5 No-load speed 2.500 - 5.000 rpm Max. cutting capacity in wood (90°) 68 mm

CORDLESS HAND-HELD CIRCULAR SAW

Max. cutting capacity in wood (45°)	50 mm
Saw blade diameter	190 mm
Saw blade bore diameter	30 mm
Comes complete with	100
1 x circular saw blade, Expert for Wood, 190 x 30 x 1.5 mm (2 608 644 513)	х
1/1 L-BOXX inlay for tool (1 600 A01 S9X)	x
L-BOXX 238 (1 600 A01 2G2)	х
Parallel guide (1 608 190 007)	х



CORDLESS HAND-HELD CIRCULAR SAWS, HAND-HELD CIRCULAR SAWS

NEW!

CORDLESS HAND-HELD CIRCULAR SAW GKS 18V-68 GC Professional





reenneur uutu	
Part number	0 601 6B5
No-load speed	2.500 – 5.000 rpm
Max. cutting capacity in wood (90°)	68 mm
Max. cutting capacity in wood (45°)	50 mm
Saw blade diameter	190 mm
Saw blade bore diameter	30 mm
Comes complete with	171
1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 3WF)	x
1 x circular saw blade, Expert for Wood, 190 x 30 x 1.5 mm (2 608 644 513)	x
1/1 L-BOXX inlay for tool (1 600 A01 S9X)	x
2 x battery ProCORE18V 8.0Ah (1 600 A01 6GK)	x
L-BOXX 238 (1 600 A01 2G2)	x
Parallel guide (1 608 190 007)	x
Quick charger GAL 18V-160 C Professional incl. Bluetooth Low Energy module (1 600 A01 9S8)	x





Part number	0 601 6B5
No-load speed	2.500 - 5.000 rpm
Max. cutting capacity in wood (90°)	68 mm
Max. cutting capacity in wood (45°)	50 mm
Saw blade diameter	190 mm
Saw blade bore diameter	30 mm
Comes complete with	170
1 x circular saw blade, Expert for Wood, 190 x 30 x 1.5 mm (2 608 644 513)	X
1/1 L-BOXX inlay for tool (1 600 A01 S9X)	x
2 x battery ProCORE18V 5.5Ah (1 600 A02 149)	x
L-BOXX 238 (1 600 A01 2G2)	x
Parallel guide (1 608 190 007)	x
Quick charger GAL 1880 CV (1 600 A00 B8H)	x

HAND-HELD CIRCULAR SAW **GKS 65 Professional**

B



Technical data		
Part number	0 601 667	
Rated input power	1,600 W	
No-load speed	5.900 rpm	
Max. cutting capacity in wood (90°)	65 mm	
Max. cutting capacity in wood (45°)	48 mm	
Saw blade diameter	190 mm	
Saw blade bore diameter	30.0 mm	
Weight	4.8 kg	
Comes complete with	060	070
1 x circular saw blade, Optiline Wood, 190 x 30 x 2.0 mm, 16 (2 608 641 184)	x	х
Dust extraction adapter (spare part number 2 610 925 244)	x	x
Hex key WAF 5 (spare part number 1 907 950 006)	x	x
Parallel guide (1 608 190 007)	x	x
Voltage 110 V	x	-
Voltage 240 V	-	x

HAND-HELD CIRCULAR SAW GKS 85 Professional



Technical data	
Part number	0 601 57A
Rated input power	2,200 W
No-load speed	5.000 rpm
Max. cutting capacity in wood (90°)	85 mm
Max. cutting capacity in wood (45°)	65 mm
Saw blade diameter	235 mm
Saw blade bore diameter	30.0 mm
Weight	7.5 kg
Comes complete with	070
1 x circular saw blade, Optiline Wood, 235 x 30/25 x 2.8 mm, 24 (2 608 640 725)	x
Dust extraction adapter (spare part number 1 619 P01 627)	х
Hex key WAF 5 (spare part number 1 907 950 006)	х
Parallel guide (1 608 190 007)	x
Voltage 240 V	х



HAND-HELD CIRCULAR SAWS

HAND-HELD CIRCULAR SAW

GKS 85 Professional



0 601 57A
1700 W
5.000 rpm
85 mm
65 mm
235 mm
30.0 mm
7.5 kg
060
X
X
X
x
X

HAND-HELD CIRCULAR SAW **GKS 165 Professional**





Part number	0 601 676
Rated input power	1,100 W
No-load speed	4.900 rpm
Max. cutting capacity in wood (90°)	66 mm
Max. cutting capacity in wood (45°)	47 mm
Saw blade diameter	165 mm
Saw blade bore diameter	20.0 mm
Weight	3.6 kg
Comes complete with	170
1 x circular saw blade, Standard for Wood speed, 165 x 1.7 x 20 mm, 12 (2 608 642 600)	х
Cardboard box	x
Internal hexagon	x
Parallel guide (1 608 190 007)	x
Vacuum adapter	x
Voltage 240 V	x

ß

HAND-HELD CIRCULAR SAW **GKS 190 Professional**



Technical data	
Part number	0 601 623
Rated input power	1,400 W
No-load speed	5.500 rpm
Max. cutting capacity in wood (90°)	70 mm
Max. cutting capacity in wood (45°)	50 mm
Saw blade diameter	190 mm
Saw blade bore diameter	30 mm
Weight	4.2 kg
Comes complete with	070
1 x circular saw blade, Optiline Wood, 190 x 30 x 2.0 mm, 16 (2 608 641 184)	Х
Hex key WAF 5 (spare part number 1 907 950 006)	X
Parallel guide (1 608 190 007)	x
Voltage 240 V	х

HAND-HELD CIRCULAR SAW **GKS 190 Professional**





HAND-HELD CIRCULAR SAW, PLUNGE SAWS

HAND-HELD CIRCULAR SAW GKS 55+ GCE Professional





Part number	0 601 682
Rated input power	1,350 W
No-load speed	2.100 – 4.700 rpm
Max. cutting capacity in wood (90°)	63 mm
Max. cutting capacity in wood (45°)	48 mm
Saw blade diameter	165 mm
Saw blade bore diameter	20.0 mm
Weight	3.8 kg
Comes complete with	171
1 x circular saw blade, Standard for Wood speed, 165 x 1.7 x 20 mm, 12 (2 608 642 600)	х
Internal hexagon	x
L-BOXX 238 (1 600 A01 2G2)	x
Parallel guide (1 608 190 007)	x
Vacuum adapter	x
	x





Technical data		
Part number	0 601 675	
Rated input power	1400 W	
No-load speed	3.600 - 6.250 rpm	
Weight	4.7 kg	
Saw blade bore diameter	20 mm	
Saw blade diameter	165 mm	
Baseplate	310 x 240 mm	
Tool dimensions (width x length x height)	367 x 231 mm	
Comes complete with	061	071
		 071 X
Comes complete with 1 x circular saw blade, Top Precision Best for Wood, 165 x 1.8/1.3 x 20 mm, 48	061	
Comes complete with 1 x circular saw blade, Top Precision Best for Wood, 165 x 1.8/1.3 x 20 mm, 48 (2 608 642 384)	061 X	x
Comes complete with 1 x circular saw blade, Top Precision Best for Wood, 165 x 1.8/1.3 x 20 mm, 48 (2 608 642 384) 1/1 LBOXX inlay for tool (1 600 A00 2UK)	061 X X	x x

PLUNGE SAW GKT 18V-52 GC Professio	onal	NEW!
BITURBO BRUSHLESS WINN WINN State		
Technical data		
Part number	0 601 6B4	
No-load speed, from	2,800 rpm	
Weight excl. battery	4.1 kg	
Saw blade bore diameter	20 mm	
Saw blade diameter	140 mm	
Baseplate	305 x 169 mm	
Tool dimensions (width x length x height)	209 x 374 x 234 mm	
Comes complete with	0 601 6B4 000	0 615 990 L54
1 x circular saw blade, Expert for Wood for cordless saws, 140 x 1.8/1.3 x 20 mm, 42 (2 608 644 500)	x	x
1 x guide rail FSN 1600 (1 600 Z00 00F)	-	х
2 x battery ProCORE18V 8.0Ah (1 600 A01 6GK)	-	х
Dust bag (2 608 000 696)	x	х
Hex key	x	х
L-BOXX 238 (1 600 A01 2G2)	x	х
Quick charger GAL 18V-160 C Professional (1 600 A01 9S7)	-	x





GUIDE RAIL SYSTEMS

The guide rail system enables rapid completion of precise, straight cuts. The VEL connecting piece can be used to connect rails of different lengths precisely, sturdily and quickly. The WAN angle guide helps to align the guide rails precisely and at accurate angles on the workpiece.



FSN OFA 32 KIT 800 Professional


(see page 158)

- Diverse routing options and cutting applications for multifunctional use
- Precise guidance and high-quality workmanship with perfect compatibility
- Extensive functionality on top of standard feature set due to 32-mm hole spacing layout



PARALLEL GUIDE, GUIDE RAILS

PARALLEL GUIDE Parallel guide for Bosch Professional plunge saws Professional



GUIDE RAIL FSN 800 Professional



Technical data		
Part number	1 600 Z00	
Tool dimensions (length)	800 mm	
Comes complete with	005	i i
Bag	x	

GUIDE RAIL FSN 1100 Professional



GUIDE RAIL
FSN 1600 Professional



Technical data		
Part number	1 600 Z00	
Tool dimensions (length)	1100 mm	
Comes complete with	006	
Bag	x	

Technical data	4 000 700	
Part number	1 600 Z00	
Tool dimensions (length)	1600 mm	
Comes complete with	00F	
Bag	x	

GUIDE RAIL FSN 2100 Professional



Technical data		
Part number	1 600 Z00	
Tool dimensions (length)	2100 mm	
Comes complete with	007	
Bag	x	

GUIDE RAIL FSN 3100 Professional



Part number	1 600 Z00	
Tool dimensions (length)	3100 mm	
Comes complete with	008	
Bag	х	



GUIDE RAILS, SYSTEM PACKAGE, CLAMP, ADAPTER, JIGSAW ADAPTER

GUIDE RAIL SN RA 32 800 Professional Very state Very state Pan number 1 600 200 Tool dimensions (length) 800 mm Conso complete with 1 00200 Bag	GUIDE RAIL ENDE RAIL State State State Image: State State <td< th=""></td<>
SYSTEM PACKAGE FSN OFA 32 KIT 800 Professional	CLAMP FSN KZW Professional
Technical data Part number 1 600 A00 Comes complete with 1T8 Bag	Technical data Part number 1 600 A00 Comes complete with 1F8 Pair of clamps FSN KZW (1 600 A00 1F8) x
ADAPTER RA 32 Professional	JIGSAW ADAPTER KS 3000 + FSN SA Professional
Technical data Part number 1 600 Z00 Weight 0.1 kg Comes complete with 03X Cardboard box	Technical data Part number 1 600 A00 Comes complete with 1FT 1 x jigsaw blade T 344 DP, Precision for Wood x x (available separately as set of 3: 2 608 633 A32) ×



JIGSAW ADAPTER

JIGSAW ADAPTER FSN SA Professional







Benchtop tools by Bosch Professional combine power and precision with a conveniently compact design – for robust work with any type of wood.

	Summary of contents
164	Sliding mitre saws
164	Combination saw
165	Mitre saws
166	Table saws
168	Table saw stands
168	Saw stands for mitre and combination saws

168 Cold circular saw

SLIDING MITRE SAWS

SLIDING MITRE SAW SLIDING MITRE SAW NEW! GCM 18V-216 Professional GCM 18V-305 GDC Professional (\bigcirc) PRECISION 18 \otimes **BITURBO** BRUSHLESS Technical data Technical data ^part number 0 601 B41 0 601 B43 Cutting capacity 0° (max. vertical) Cutting capacity, 0° 70 x 270 mm 120 x 250 mm Cutting capacity, 45° mitre Cutting capacity 0° (max, horizontal) 70 x 190 mm 45 x 400 mm Cutting capacity, 45° bevel 45 x 270 mm Cutting capacity, 45° mitre 60 x 240 mm Mitre setting 47 ° L / 47 ° R Cutting capacity, 45° bevel 40 x 341 mn 47 L / 47 R 45 ° L / 0 ° R 520 x 770 x 630 mm 52 ° L / 60 ° R 47 ° L / 47 ° R Bevel setting Mitre setting Tool dimensions (width x length x height) Bevel setting No-load speed 4.600 rpm Tool dimensions (width x length x height) 565 x 630 x 790 mm Saw blade diameter 216 mm No-load speed 3 – 4 rpm 305 mm 14.7 kg Saw blade diameter Weight 18 V Saw blade bore diameter Battery voltage 30 mm Comes complete with 000 Weight 26.9 kg 1 x circular saw blade. Standard for Wood. Battery voltage 18 V 216 x 30 x 1.7 mm, 24 (2 608 837 721) Comes complete with ... 000 Cardboard box 1 x cordless saw blade, Expert for Wo 2.2 /1.6 x 30 mm, 60 (2 608 644 528) х Dustbag (spare part number 1 609 B05 010) Dust bag (1 600 A01 ZE5) Insert plate (spare part number 1 609 B03 717) x x SDS saw blade lock (spare part number 1 609 B05 323) Clamp (1 609 B02 585) х Internal hexagon (1 609 B00 256) х

SLIDING MITRE SAW GCM 800 SJ Professional




Technical data	
Part number	0 601 B19
Saw blade diameter	216 mm
Mitre setting	47 ° L / 47 ° R
Bevel setting	45 ° L / 0 ° R
Cutting capacity, 0°	70 x 270 mm
Cutting capacity, 45° mitre	70 x 190 mm
Cutting capacity, 45° bevel	48 x 270 mm
Rated input power	1400 W
Comes complete with	070
Comes complete with 1 x circular saw blade, Optiline Wood, 216 x 30 x 2.8 mm, 24 (2 608 640 431)	070 x
1 x circular saw blade, Optiline Wood,	
1 x circular saw blade, Optiline Wood, 216 x 30 x 2.8 mm, 24 (2 608 640 431)	X
1 x circular saw blade, Optiline Wood, 216 x 30 x 2.8 mm, 24 (2 608 640 431) Hex key	x x
1 x circular saw blade, Optiline Wood, 216 x 30 x 2.8 mm, 24 (2 608 640 431) Hex key	x x
1 x circular saw blade, Optiline Wood, 216 x 30 x 2.8 mm, 24 (2 608 640 431) Hex key	x x

SLIDING MITRE SAW GCM 800 SJ Professional

1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 6NH) Insert plate (1 609 B02 375)

Cardboard box

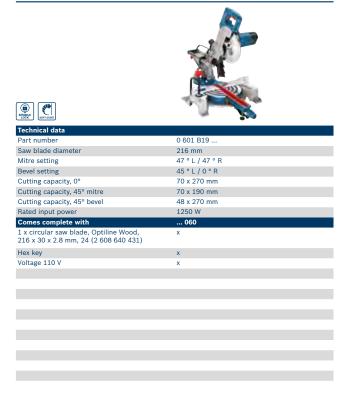

х

NEW!

SLIDING MITRE SAWS

SLIDING MITRE SAW GCM 8 SJL Professional



Technical data	
Part number	0 601 B19
Saw blade diameter	216 mm
Mitre setting	52 ° L / 60 ° R
Bevel setting	47 ° L / 2 ° R
Cutting capacity, 0°	70 x 312 mm
Cutting capacity, 45° mitre	70 x 214 mm
Cutting capacity, 45° bevel	48 x 312 mm
Rated input power	1400 W
Comes complete with	160
1 x circular saw blade, Optiline Wood, 210 x 30 x 2/1.4 mm, 48 (2 608 640 430)	X
Clamp (1 609 B04 224)	x
Voltage 110 V	х

SLIDING MITRE SAW GCM 8 SJL Professional





Te

iecinical uata	
Part number	0 601 B19
Saw blade diameter	216 mm
Mitre setting	52 ° L / 60 ° R
Bevel setting	47 ° L / 2 ° R
Cutting capacity, 0°	70 x 312 mm
Cutting capacity, 45° mitre	70 x 214 mm
Cutting capacity, 45° bevel	48 x 312 mm
Rated input power	1600 W
Comes complete with	170
1 x circular saw blade, Optiline Wood, 210 x 30 x 2/1.4 mm, 48 (2 608 640 430)	Х
Clamp (1 609 B04 224)	x
Voltage 240 V	x

SLIDING MITRE SAW GCM 8 SDE Professional



SLIDING MITRE SAW GCM 350-254 Professional



Technical data	
Part number	0 601 B22
Saw blade diameter	254 mm
Mitre setting	52 ° L / 60 ° R
Bevel setting	47 ° L / 47 ° R
Cutting capacity, 0°	89 x 320 mm
Cutting capacity, 45° mitre	89 x 226 mm
Cutting capacity, 45° bevel	50 x 320 mm
Rated input power	1800 W
Comes complete with	670
1 x circular saw blade, Expert for Wood, 254 x 30 x 2.4 mm, 60 (2 608 642 530)	Х

SLIDING MITRE SAWS, COMBINATION SAW

SLIDING MITRE SAW		SLIDING MITRE SAW	
GCM 350-254 Profession	onal	GCM 12 SDE Professio	
Technical data	0.001.000	Technical data	0.004.000
Part number Saw blade diameter Mitre setting Bevel setting Cutting capacity, 0° Cutting capacity, 45° mitre Cutting capacity, 45° bevel	0 601 B22 254 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 89 x 320 mm 89 x 226 mm 50 x 320 mm	Part number Saw blade diameter Mitre setting Bevel setting Cutting capacity, 0° Cutting capacity, 45° mitre Cutting capacity, 45° bevel	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 x 370 mm 85 x 250 mm 60 x 360 mm
Rated input power Comes complete with	1450 W 660	Rated input power Comes complete with	1800 W 170
1 x circular saw blade, Expert for Wood, 254 x 30 x 2.4 mm, 60 (2 608 642 530)	x	1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531) Voltage 240 V	x x
SLIDING MITRE SAW GCM 12 SDE Professio	nal	COMBINATION SAW GTM 12 JL Profession	al
GCM 12 SDE Professio		GTM 12 JL Profession:	
GCM 12 SDE Professio	onal 0 601 B23 305 mm	GTM 12 JL Profession	al 0 601 B15 305 mm
GCM 12 SDE Profession Image: Constraint of the setting	0 601 B23 305 mm 52 ° L / 60 ° R	GTM 12 JL Professions	0 601 B15 305 mm 30 mm
GCM 12 SDE Professio	0 601 B23 305 mm	GTM 12 JL Professions	0 601 B15 305 mm
GCM 12 SDE Profession Image: Constraint of the setting Bevel setting Cutting capacity, 0° Cutting capacity, 45° mitre	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 × 370 mm 85 × 250 mm	GTM 12 JL Professions	0 601 B15 305 mm 30 mm 48 ° L / 48 ° R 47 ° L / 2° R 95 x 150 mm
GCM 12 SDE Profession Image: Constraint of the setting Devel setting Devel setting Cutting capacity, 0°	0 601 B23 305 mm 52° L / 60 ° R 47° L / 47 ° R 85 × 370 mm	GTM 12 JL Professions	0 601 B15 305 mm 30 mm 48° L / 48° R 47° L / 2° R
GCM 12 SDE Profession Image: Constraint of the set of th	0 601 B23 305 mm 52° L / 60 ° R 47° L / 47 ° R 85 x 370 mm 85 x 250 mm 60 x 360 mm 1450 W 160	GTM 12 JL Profession: Image: Construction of the system Image: Construction of the system Image: Construction of the system Saw blade bore diameter Saw blade bore diameter Saw blade bore diameter Saw blade bore diameter Mitre setting Bevel setting Cutting capacity, 0° <	0 601 B15 305 mm 30 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 90 mm 1800 W 071
GCM 12 SDE Profession Image: Constraint of the setting Image: Constrain	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 × 370 mm 85 × 250 mm 60 × 360 mm 1450 W 160 x	GTM 12 JL Profession: Image: Constraint of the set of th	0 601 B15 305 mm 30 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 30 mm 1800 W
GCM 12 SDE Profession Image: Constraint of the setting Image: Constraint of the setting Bevel setting Cutting capacity, 45° mitre Cutting capacity, 45° mitre <td>0 601 B23 305 mm 52° L / 60 ° R 47° L / 47 ° R 85 x 370 mm 85 x 250 mm 60 x 360 mm 1450 W 160</td> <td>GTM 12 JL Profession: Image: Constraint of the second state o</td> <td>0 601 B15 305 mm 305 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 90 mm 1800 W x</td>	0 601 B23 305 mm 52° L / 60 ° R 47° L / 47 ° R 85 x 370 mm 85 x 250 mm 60 x 360 mm 1450 W 160	GTM 12 JL Profession: Image: Constraint of the second state o	0 601 B15 305 mm 305 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 90 mm 1800 W x
GCM 12 SDE Profession Image: Constraint of the setting Image: Constrain	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 × 370 mm 85 × 250 mm 60 × 360 mm 1450 W 160 x	GTM 12 JL Profession: Image: Constraint of the set of th	0 601 B15 305 mm 30 mm 48°L / 48°R 47°L / 2°R 95× 150 mm 95× 90 mm 1800 W 071 x
GCM 12 SDE Profession Image: Constraint of the setting Image: Constrain	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 × 370 mm 85 × 250 mm 60 × 360 mm 1450 W 160 x	GTM 12 JL Profession: Image: Constraint of the second state o	0 601 B15 305 mm 305 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 90 mm 1800 W x
GCM 12 SDE Profession Image: Constraint of the setting Image: Constrain	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 × 370 mm 85 × 250 mm 60 × 360 mm 1450 W 160 x	GTM 12 JL Profession: Image: Constraint of the second state o	0 601 B15 305 mm 305 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 90 mm 1800 W x
GCM 12 SDE Profession Image: Constraint of the setting Image: Constrain	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 × 370 mm 85 × 250 mm 60 × 360 mm 1450 W 160 x	GTM 12 JL Profession: Image: Constraint of the second state o	0 601 B15 305 mm 305 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 90 mm 1800 W x
GCM 12 SDE Profession Image: Constraint of the setting Image: Constrain	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 × 370 mm 85 × 250 mm 60 × 360 mm 1450 W 160 x	GTM 12 JL Profession: Image: Constraint of the second state o	0 601 B15 305 mm 305 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 90 mm 1800 W x
GCM 12 SDE Profession Image: Constraint of the setting Image: Constrain	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 × 370 mm 85 × 250 mm 60 × 360 mm 1450 W 160 x	GTM 12 JL Profession: Image: Constraint of the second state o	0 601 B15 305 mm 305 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 90 mm 1800 W x
GCM 12 SDE Profession Image: Constraint of the setting Image: Constrain	0 601 B23 305 mm 52 ° L / 60 ° R 47 ° L / 47 ° R 85 × 370 mm 85 × 250 mm 60 × 360 mm 1450 W 160 x	GTM 12 JL Profession: Image: Constraint of the second state o	0 601 B15 305 mm 305 mm 48 ° L / 48 ° R 47 ° L / 2 ° R 95 x 150 mm 95 x 90 mm 1800 W x

MITRE SAWS, TABLE SAWS

MITRE SAW GCM 12 GDL Professional



Technical data	
Part number	0 601 B23
Saw blade diameter	305 mm
Mitre setting	52 ° L / 60 ° R
Bevel setting	47 ° L / 47 ° R
Cutting capacity, 0°	104 x 341 mm
Cutting capacity, 45° mitre	104 x 240 mm
Cutting capacity, 45° bevel	51 x 341 mm
Rated input power	2000 W
Comes complete with	670
Comes complete with 1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531)	670 x
1 x circular saw blade, Expert for Wood,	
1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531)	x
1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531) Collet (spare part number 1 609 B02 585)	x x
1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531) Collet (spare part number 1 609 B02 585) Insert plate (1 609 B02 375)	x x x
1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531) Collet (spare part number 1 609 B02 585) Insert plate (1 609 B02 375) Internal hexagon (1 609 B00 256)	x x x x x

MITRE SAW GCM 12 GDL Professional





Part number	0 601 B23
Saw blade diameter	305 mm
Mitre setting	52 ° L / 60 ° R
Bevel setting	47 ° L / 47 ° R
Cutting capacity, 0°	104 x 341 mm
Cutting capacity, 45° mitre	104 x 240 mm
Cutting capacity, 45° bevel	51 x 341 mm
Rated input power	1500 W
Comes complete with	660
Comes complete with 1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531)	660 x
1 x circular saw blade, Expert for Wood,	
1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531)	x
1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531) Collet (spare part number 1 609 B02 585)	x x
1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531) Collet (spare part number 1 609 B02 585) Insert plate (1 609 B02 375)	x x x
1 x circular saw blade, Expert for Wood, 305 x 30 x 2.4 mm, 72 (2 608 642 531) Collet (spare part number 1 609 B02 585) Insert plate (1 609 B02 375) Internal hexagon (1 609 B00 256)	x x x x x

TABLE SAW GTS 10 J Professional



Technical data		
Part number	0 601 B30	
Saw blade diameter	254 mm	
Saw blade bore diameter	30 mm	
Incline setting	47 ° L / 2 ° R	
Table size	642 x 634 mm	
Weight	27.0 kg	
Comes complete with	560	570
1 x circular saw blade, Optiline Wood, 254 x 2.8/1.8 x 30 mm, 24 (2 608 838 412)	х	х
Angle guide (2 610 015 507)	х	х
Dust extraction adapter (2 610 015 509)	x	x
Parallel guide (2 610 016 853)	х	х
Push stick (2 610 015 022)	x	х
Voltage 110 V	х	-
Voltage 240 V	-	x

TABLE SAW GTS 10 XC Professional

Voltage 240 V



х

TABLE SAWS, TABLE SAW STANDS

TABLE SAW GTS 635-216 Professional



Technical data	
Part number	0 601 B42
Saw blade diameter	216 mm
Saw blade bore diameter	30 mm
Incline setting	45 ° L / 0 ° R
Table size	500 x 658 mm
Weight	28 kg
Comes complete with	071
Comes complete with 1 x circular saw blade, Optiline Wood, 216 x 30 x 1.6 mm, 22 (2 608 838 410)	071 ×
1 x circular saw blade, Optiline Wood,	
1 x circular saw blade, Optiline Wood, 216 x 30 x 1.6 mm, 22 (2 608 838 410)	X



Saw blade diameter	216 mm
Saw blade bore diameter	30 mm
Incline setting	45 ° L / 0 ° R
Table size	500 x 658 mm
Weight	22 kg
Comes complete with	070
1 x circular saw blade, Optiline Wood, 216 x 30 x 1.6 mm, 22 (2 608 838 410)	x
Cardboard box	х

TABLE SAW STAND GTA 600 Professional



0 601 B22	
520 mm	
602 mm	
GTS 10 J Professional	
6,3 kg	
001	
х	
	520 mm 602 mm GTS 10 J Professional 6,3 kg 001

TABLE SAW STAND GTA 6000 Professional



Technical data	
Part number	0 601 B24
Length of work bench	750 mm
Height of work bench	602 mm
Suitable for	GTS 10 XC Professional
Comes complete with	100
Cardboard box	х

TABLE SAW STANDS

TABLE SAW STAND GTA 60 W Professional

Technical data	
Part number	0 601 B12
Length of work bench	1,220 mm
Height of work bench	622 mm
Suitable for	GTS 10, GTS 10 XC, GTS 10 J Professional
Weight	23.76 kg
Comes complete with	000
Cardboard box	x

TABLE SAW STAND

GTA 2600 Professional



Technical data	
Part number	0 601 B12
Length of work bench	1220 mm
Length of work bench with extension	2630 mm
Height of work bench	940 mm
Weight	15.3 kg
Comes complete with	300
Cardboard box	х

TABLE SAW STAND GTA 3800 Professional



Technical data	
Part number	0 601 B24
Length of work bench	1578 mm
Length of work bench with extension	3877 mm
Height of work bench	824 mm
Weight	22 kg
Comes complete with	000
Cardboard box	x
Spanner (0609 B01 937)	х
Workpiece supports with roller and length stop (0609 B01 850)	x
Machine holder (2 610 948 622)	x

TABLE SAW STAND GTA 2500 W Professional



0 601 B12
1044 mm
2504 mm
947 mm
35 kg
100
x
x

TABLE SAW STAND, SAW STANDS FOR MITRE AND COMBINATION SAWS, COLD CIRCULAR SAW

TABLE SAW STAND GTA 560 Professional



Technical data	
Part number	0 601 B22
Length of work bench	682 mm
Height of work bench	564 mm
Suitable for	GTS 635-216 Professional
Weight with/without accessories	6,0 / 6,0 kg
Comes complete with	700
Cardboard box	х

SAW STAND FOR MITRE AND COMBINATION SAWS GTA 2500 W Professional



Technical data	
Part number	0 601 B12
Length of work bench	1,044 mm
Length of work bench with extension	2,504 mm
Height of work bench	947 mm
Weight with/without accessories	34,8 kg
Comes complete with	100
Machine holder (2 610 948 622)	х

SAW STAND FOR MITRE AND COMBINATION SAWS GTA 3800 Professional



Technical data	
Part number	0 601 B24
Length of work bench	1,578 mm
Length of work bench with extension	3,877 mm
Height of work bench	824 mm
Weight with/without accessories	22,3 / 18,9 kg
Comes complete with	000
Machine holder (2 610 948 622)	х
Machine holder (2 610 948 622) Spanner (1 609 B01 937)	x x
	x
Spanner (1 609 B01 937) Workpiece supports with roller and length stop	x

COLD CIRCULAR SAW GCD 12 JL Professional



Technical data			
Part number	0 601 B28		
No-load speed	1,500 rpm		
Cutting capacity at rectangle 0°	158 x 80 mm		
Cutting capacity at rectangle 45° mitre	85 x 85 mm		
Cutting capacity at square 0°	100 x 100 mm		
Cutting capacity at square 45° mitre	85 x 85 mm		
Cutting capacity at Lprofile 0°	110 x 110 mm		
Cutting capacity at Lprofile 45° mitre	85 x 85 mm		
Weight	20.0 kg		
Comes complete with	060	070	
1 x circular saw blade, Expert for steel, 305 x 25.4 x 2.6 mm, 60 (2 608 643 060)	х	x	
Voltage 110 V	х	-	
Voltage 240 V	-	x	





					1															\neg	
																				—	
				+																	
					1															-	
		-																		-	
	+				+															\neg	
		-			1															\neg	_
	+			-	1															\neg	
				-	1															\neg	
		+			1															\neg	
	+				+															\neg	
		-			1															\neg	
	+			-	1															\neg	
	\neg			-	1															\neg	
	-				1															-	
				1																	
				-	1																
				+													 				_
																				\neg	
																				\neg	
				1																	
				1																-	
																				_	
																				\neg	
																				\neg	
																				_	
					1															\neg	
					1															\neg	
																				\neg	
	\top				1															\neg	
																				-	
																				_	
																				-	
				+													 			\neg	
			1		1																\rightarrow







Working with metal requires durable tools. Bosch Professional has developed a line of grinders with the versatility and strength that meets the needs of tradesmen and users working in the metal industry.

	Summary of contents
172	X-Lock Page
175	Large angle grinders
176	System accessories for large angle grinders
178	Cordless angle grinders
185	Small angle grinders
186	System accessories for small angle grinders
189	Cordless straight grinders
190	Straight grinders
190	Polisher
192	Nibbler

10



JUST ONE CLICK.

The ultimate changing system for grinders.





World's-First by Bosch Professional – the innovative system to change angle grinder accessories with just one click.

X-TRA REVOLUTIONARY

► CONVENIENT:

Easy change of grinder accessories without any losable parts or additional mounting equipment – up to 5 times faster compared to conventional changing solutions.

► COMPREHENSIVE:

We offer a huge range of grinders and accessories to cope with all kinds of tasks.

► RELIABLE:

Directional accessories like diamond discs can't be incorrectly mounted thanks to the innovative X-LOCK System. This leads to better working results.



LARGE ANGLE GRINDERS

Bosch power tools for metalworking stand for maximum power – even in the toughest applications such as surface finishing or cutting a wide variety of materials.



GWS 24-230 LVI Professional

(see page 175)

- Strong results also for advanced work are ensured by a high-powered 2,400 W motor
- ► User protection increased to an especially high level due to KickBack Control and restart protection
- ► Vibration Control main handle and Vibration Control auxiliary handle reduce vibration up to 50%

LARGE ANGLE GRINDERS

LARGE ANGLE GRINDER GWS 22-180 H Professional



ROLLEYON PROJECTOR

Technical data		
Part number	0 601 881	
Rated input power	2,200 W	
No-load speed	8.500 rpm	
Disc diameter	180 mm	
Grinding spindle thread	M 14	
Switch	PROtection	
Weight	5.0 kg	
Comes complete with	L63	L73
Auxiliary handle (1 602 025 022)	х	х
Backing flange (1 605 703 099)	x	x
Locking nut (1 603 340 040)	x	x
Protective guard (2 605 510 297)	x	x
Two-hole spanner (1 607 950 048)	x	x
Voltage 110 V	x	-
Voltage 240 V	-	x

LARGE ANGLE GRINDER GWS 22-230 H Professional



PROTACTION PROTACTION

Technical data		
Part number	0 601 882	
Rated input power	2,200 W	
No-load speed	6.500 rpm	
Disc diameter	230 mm	
Grinding spindle thread	M 14	
Switch	PROtection / 1	Tri-Control (see scope of delivery)
Weight	5.2 kg	
Comes complete with	L63	L73
Auxiliary handle (1 602 025 022)	х	x
Backing flange (1 605 703 099)	х	x
Locking nut (1 603 340 040)	х	x
Protective guard (2 605 510 298)	х	x
Two-hole spanner (1 607 950 048)	х	x
	х	-
Voltage 110 V		
Voltage 110 V Voltage 240 V	-	x
•	-	x

LARGE ANGLE GRINDER GWS 22-230 LVI Professional

PROtection 1 Technical data 0 601 891 Part numbe Rated input power 2.200 W No-load speed 6.600 rpm Disc diameter 230 mm Grinding spindle thread M 14 Switch PROtection Weight 5.4 kg Comes complete with ... C60 Backing flange (1 605 703 099) Locking nut (1 603 340 040) x x Quick adjustment protective guard (2 605 510 281) х х Two-hole spanner (1 607 950 048) х х Vibration Control auxiliary handle (2 602 025 181) x х Voltage 110 V x Voltage 240 V x

LARGE ANGLE GRINDER GWS 24-230 LVI Professional



SYSTEM ACCESSORIES FOR LARGE ANGLE GRINDERS

SYSTEM ACCESSORY FOR LARGE ANGLE GRINDERS **GDE 230 FC-S Professional**

F



Technical data ^part numbe 1 600 A00 GWS20, GWS2000-23JH, GWS20-230/H/JH, GWS21-230/H/JH/HV/JHV, GWS22, GWS22-230/H/JH, GWS230/H/JH, GWS2300H, GWS24, GWS24-230/B/H/BV/BX/JB/JH/JBV/ JBX/H+2B/PROFI Compatible with Weight 2100 g Comes complete with ... 3DL Cardboard box х

SYSTEM ACCESSORY FOR LARGE ANGLE GRINDERS **GDE 230 FC-T Professional**





Part number	1 600 A00
Compatible with	GWS22-230/LV/LVI/LVI Bare, GWS24-230/LV/ JVX/LVI/LVJ/LVI Bare
Weight	2100 g
Comes complete with	3DM
Cardboard box	x

10



SMALL ANGLE GRINDERS

Small angle grinders from Bosch impress with their power and handling – especially for continuous use. Restart protection and KickBack Control ensure safety.

CORDLESS ANGLE GRINDER GWS 12V-76 Professional



Part number	0 601 9F2	
Battery voltage	12 V	
No-load speed	19.500 rpm	
Grinding/cutting disc, diameter	76 mm	
Bore size, diameter	10.0 mm	
Grinding spindle thread	M 5	
Comes complete with	000	003
1 x carbide cutting disc, Carbide Multiwheel, 76 x 10 mm (2 608 623 011)	x	х
1/2 L-BOXX inlay for charger and battery	-	х
1/2 L-BOXX inlay for GWS 12V-76 (1 600 A00 F0F)	x	x
2 x inox cutting disc, Expert for Inox, 76 x 10 mm (available separately as set of 5: 2 608 601 520)	x	x
Cardboard box	x	-
L-BOXX 102 (1 600 A01 2FZ)	-	х
Protective guard (2 608 000 632)	x	х

CORDLESS ANGLE GRINDER GWS 18-125 V-LI Professional



Part number	0 601 93A		
Battery voltage	18 V		
No-load speed	10.000 rpm		
Grinding/cutting disc, diameter	125 mm		
Comes complete with	307	308	377
1/1 L-BOXX inlay for tool and charger (1 600 A00 2WH)	-	x	x
2 x battery GBA 18V 5.0Ah (1 600 A00 2U5)	-	-	х
Auxiliary handle (1 602 025 024)	х	х	х
Backing flange (spare part number 2 605 703 014)	-	x	-
Cardboard box	х	-	-
L-BOXX 136 (1 600 A01 2G0)	-	х	х
Locking nut (1 603 340 040)	-	х	-
Protective guard (1 619 P06 548)	х	х	х
Quick charger GAL 1880 CV (1 600 A00 B8G)	-	-	х
Two-hole spanner (1 607 950 043)	-	x	-
Two-hole spanner (spare part number 1 607 950 060)	-	x	-

CORDLESS ANGLE GRINDER, SMALL ANGLE GRINDERS

CORDLESS ANGLE GRINDER

GWS 18 V-LI Professional



Technical data		
Part number	0 601 93A	
Battery voltage	18 V	
No-load speed	10.000 rpm	
Grinding/cutting disc, diameter	115 mm	
Comes complete with	300	304
Auxiliary handle (1 602 025 024)	х	x
Backing flange (spare part number 2 605 703 014)	-	x
Cardboard box	х	-
L-BOXX 136 (1 600 A01 2G0)	-	x
L-BOXX inlay for tool and charger	-	x
Locking nut (1 603 340 040)	-	x
Protective guard (1 619 P02 834)	х	x
Two-hole spanner (1 607 950 043)	-	x

SMALL ANGLE GRINDER GWS 18V-7 Professional





MOTOR

Part number	0 601 9H9	
Battery voltage	18 V	
No-load speed	11,000 rpm	
Grinding/cutting disc, diameter	115 mm	
Bore size, diameter	22.2 mm	
Grinding spindle thread	M14	
Comes complete with	003	004
Backing flange (1 605 703 099)	х	x
Locking nut (1 603 340 040)	х	x
Two-hole spanner (1 607 950 043)	х	x
Protective guard (2 608 000 677)	х	x
Auxiliary handle (1 602 025 024)	х	x
Cardboard box	х	-
L-BOXX 136 (1 600 A00 1RR)	-	x

SMALL ANGLE GRINDER SMALL ANGLE GRINDER NEW! **GWS 18V-10 Professional GWS 18V-10 C Professional** 0 \odot () #115mm KICKBACK PROTECTION 22 \otimes ۲ 0 SPINDLE LOCK 8 0 (\bigcirc) 1 1000 W 9000 min"/rpm 9000 min"/rpm \odot MOTOR Technical data Technical data 601 9J4. 601 9G3 art numbe Battery voltage 18 V Battery voltage 18 V No load speed 9.000 rpm No-load speed 9.000 rpm 1000 W Grinding/cutting disc, diameter 115 mm Equivalent . Weight excl. battery Bore size, diameter 22.2 mm 2.1 kg Comes complete with ... 000 Grinding spindle thread M 14 .001 Comes complete with Backing flange (spare part number 2 605 703 014) ... 20A x Backing flange (spare part numbe 2 605 703 014) Quick-locking nut (2 608 000 684) х x Cardboard box x Cardboard box х Protective guard (1 605 510 364) Protective guard (1 605 510 364) х x х 1/1 L-BOXX inlay for tool and charger (1 600 A01 166) Quick-locking nut (2 608 000 684) х х Vibration Control auxiliary handle (2 602 025 171) L-BOXX 136 (1 600 A00 1RR)

SMALL ANGLE GRINDERS

SMALL ANGLE GRINDER GWS 18V-10 C Professional





MOTOR

Technical data		
Part number	0 601 9G3	
Battery voltage	18 V	
No-load speed	9.000 rpm	
Grinding/cutting disc, diameter	125 mm	
Bore size, diameter	22.2 mm	
Grinding spindle thread	M 14	
Comes complete with	10A	10B
1/1 L-BOXX inlay for tool and charger (1 600 A01 166)	-	x
Backing flange (spare part number 2 605 703 014)	x	x
Cardboard box	x	-
L-BOXX 136 (1 600 A01 2G0)	-	x
Protective guard (1 605 510 365)	x	x
Quick-locking nut (2 608 000 684)	х	x
Vibration Control auxiliary handle (2 602 025 171)	x	x

SMALL ANGLE GRINDER GWS 18V-10 SC Professional

 \otimes (\bigcirc) ۲ PROTECTION LI-ION 4500/ 6000/ 9000 MOTOR Technical data 0 601 9G3 art numbe Battery voltage 18 V 4.500 - 9.000 rpm No-load speed Grinding/cutting disc, diameter 125 mm Bore size, diameter 22.2 mm Grinding spindle thread M 14 Comes complete with ... 47D ... 47H ... 40E 1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 3WF) х 1/1 L-BOXX inlay for tool and charger (1 600 A01 166) х x х

х

x

х

х

x

х

х

х

х

x

х

х

x

х

х

x

SMALL ANGLE GRINDER GWS 18V-10 SC Professional

SPEED PROTECTION LI-ION Same and MOTOR Technical data 601 9G3 Battery voltage 18 V 4.000 - 7.500 rpm No-load speed Grinding/cutting disc, diameter 150 mm Bore size, diameter 22.2 mm Grinding spindle thread M 14 Comes complete with .. 508 1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 3WF) Backing flange (spare part number 2 605 703 014) x L-BOXX 136 (1 600 A01 2G0) Protective guard (1 605 510 366) х Quick-locking nut (2 608 000 684) Vibration Control auxiliary handle (2 602 025 171)

SMALL ANGLE GRINDER **GWS 18V-10 SC Professional**

2 x battery GBA 18V 5.0Ah (1 600 A00 2U5) 2 x battery ProCORE18V 8.0Ah (1 600 A01 6GK) -

Quick charger GAL 1880 CV (1 600 A00 B8H)

Backing flange (spare part number 2 605 703 014)

L-BOXX 136 (1 600 A01 2G0)

Protective guard (1 605 510 365)

Quick-locking nut (2 608 000 684)

Vibration Control auxiliary handle (2 602 025 171)



SMALL ANGLE GRINDERS

SMALL ANGLE GRINDER GWS 18V-10 PC Professional



Technical data		
Part number	0 601 9G3	
Battery voltage	18 V	
No-load speed	9.000 rpm	
Grinding/cutting disc, diameter	125 mm	
Grinding spindle thread	M 14	
Comes complete with	E0A	E0B
1/1 L-BOXX inlay for tool and charger (1 600 A01 166)	-	x
Backing flange (spare part number 2 605 703 014)	x	x
Cardboard box	x	-
L-BOXX 136 (1 600 A01 2G0)	-	x
Protective guard (1 605 510 365)	x	x
Quick-locking nut (2 608 000 684)	x	x
Vibration Control auxiliary handle (2 602 025 171)	х	x

NEW!

MOTOR

SMALL ANGLE GRINDER GWS 18V-10 PSC Professional



Part number	0 601 9G3
Battery voltage	18 V
No-load speed	4.500 – 9.000 rpm
Grinding/cutting disc, diameter	125 mm
Bore size, diameter	22.2 mm
Grinding spindle thread	M 14
Comes complete with	F0B
1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 3WF)	X
1/1 LBOXX inlay for tool and charger (1 600 A01 166)	x
Backing flange (spare part number 2 605 703 014)	X
L-BOXX 136 (1 600 A01 2G0)	x
Protective guard (1 605 510 365)	х
Quick-locking nut (2 608 000 684)	x
Vibration Control auxiliary handle (2 602 025 171)	X

SMALL ANGLE GRINDER GWS 18V-15 C Professional () S 125mm M 14 LI-ION ing 🍭 BITURBO BRUSHLESS Technical data ^part numbe 0 601 No-load speed 11.000 rpm Grinding/cutting disc, diameter 125 mm 22.2 mm Bore size, diameter Grinding spindle thread M 14 Comes complete with ... 000 Backing flange (spare part number 2 605 703 014) x L-BOXX 136 (1 600 A01 2G0) х Protective guard (1 605 510 365) Quick-locking nut (2 608 000 684) x х Vibration Control auxiliary handle (2 602 025 171)

SMALL ANGLE GRINDER GWS 18V-15 SC Professi		NEW!
Image: Constraint of the second se		
Technical data Part number No-load speed	0 601 9H6 3.400 – 11.000 rpm	
Grinding/cutting disc, diameter Bore size, diameter	125 mm 22.2 mm	
Grinding spindle thread Comes complete with 1 x Bluetooth Low Energy module	M 14 100 x	
GCY 42 Professional (1 600 A01 3WF) Backing flange (spare part number 2 605 703 014)	x	
L-BOXX 136 (1 600 A01 2G0) Protective guard (1 605 510 365)	x x	
Quick-locking nut (2 608 000 684) Vibration Control auxiliary handle (2 602 025 171)	x x	
(, , _ ,		

х

SMALL ANGLE GRINDERS

NEW!
0 rpm

SMALL ANGLE GRINDERS

SMALL ANGLE GRINDE GWX 18V-10 PC Profes		NEW!	SMALL ANGLE GRIND		NEW!
		E C C C C C C C C C C C C C C C C C C C			
Technical data Part number	0 601 7B0		Technical data Part number	0 601 780	
Battery voltage	18 V		Battery voltage	18 V	
No-load speed Grinding/cutting disc, diameter	9.000 rpm 125 mm		No-load speed Grinding/cutting disc, diameter	4.500 - 9.000 rpm 125 mm	
Comes complete with	700		Comes complete with	800	
1/1 LBOXX inlay for tool and charger (1 600 A01 166)	x		1 x Bluetooth Low Energy module GCY 42 Professional (1 600 A01 3WF)	x	
L-BOXX 136 (1 600 A01 2G0) Protective guard (1 605 510 365)	x x		1/1 LBOXX inlay for tool and charger (1 600 A01 166)	x	
Vibration Control auxiliary handle	x		L-BOXX 136 (1 600 A01 2G0)	x	
(2 602 025 171)			Protective guard (1 605 510 365) Vibration Control auxiliary handle	x x	
			(2 602 025 171)		
SMALL ANGLE GRINDE GWX 18V-15 SC Profes		NEW!	SMALL ANGLE GRIND		
GWX 18V-15 SC Profes			GWS 7-100 Profession		
GWX 18V-15 SC Profes Image:	sional			al	
GWX 18V-15 SC Profes	sional		GWS 7-100 Profession	al	
GWX 18V-15 SC Profes	sional		GWS 7-100 Profession	al	
	0 601 9H6 3.400 - 11.000 rpm 125 mm 500		GWS 7-100 Profession	al 0 601 388 720 W 11.000 rpm 100 mm	
	0 601 9H6 3.400 - 11.000 rpm 125 mm		GWS 7-100 Profession	al 0 601 388 720 W 11.000 rpm 100 mm M 10 1.8 kg	
GWX 18V-15 SC Profes Image: Constraint of the state of th	0 601 9H6 3.400 - 11.000 rpm 125 mm 500		GWS 7-100 Profession Image: Constraint of the second sec	al 0 601 388 720 W 11.000 rpm 100 mm M 10 1.8 kg 163 1	73
GWX 18V-15 SC Profes Image: Construction of the state of	sional		GWS 7-100 Profession GWS 7-100 Profession Image: Construction of the second se	al 0 601 388 720 W 11.000 rpm 100 mm M 10 1.8 kg	73
GWX 18V-15 SC Profes Image: Construction of the state of	0 601 9H6 3.400 - 11.000 rpm 125 mm 500 x <tr td=""> x</tr>		GWS 7-100 Profession GWS 7-100 Profession Image: Construction of the system I	al 0 601 388 720 W 11.000 rpm 100 mm M 10 1.8 kg 163 1 x x x x x x	73
GWX 18V-15 SC Profes Image: Construction of the state of	sional		GWS 7-100 Profession GWS 7-100 Profession Image: Construction of the system I	al 0 601 388 720 W 1000 rpm 100 mm M 10 1.8 kg 163 1 x x x x x x x x x x x x x x x x x x x	73
GWX 18V-15 SC Profess Image: Construction of the second	0 601 9H6 3.400 - 11.000 rpm 125 mm 500 x <tr td=""> x</tr>		GWS 7-100 Profession	al	73
GWX 18V-15 SC Profess Image: Construction of the second	0 601 9H6 3.400 - 11.000 rpm 125 mm 500 x <tr td=""> x</tr>		GWS 7-100 Profession GWS 7-100 Profession Image: Construction of the system I	al 0 601 388 720 W 1000 rpm 100 mm M 10 1.8 kg 163 1 x x x x x x x x x x x x x x x x x x x	
GWX 18V-15 SC Profess Image: Construction of the second	0 601 9H6 3.400 - 11.000 rpm 125 mm 500 x <tr td=""> x</tr>		GWS 7-100 Profession	al	
GWX 18V-15 SC Profess Image: Construction of the second	0 601 9H6 3.400 - 11.000 rpm 125 mm 500 x <tr td=""> x</tr>		GWS 7-100 Profession	al	
GWX 18V-15 SC Profess Image: Construction of the second	0 601 9H6 3.400 - 11.000 rpm 125 mm 500 x <tr td=""> x</tr>		GWS 7-100 Profession	al	73
GWX 18V-15 SC Profess Image: Construction of the second	0 601 9H6 3.400 - 11.000 rpm 125 mm 500 x <tr td=""> x</tr>		GWS 7-100 Profession	al	73
GWX 18V-15 SC Profess Image: Construction of the state of	0 601 9H6 3.400 - 11.000 rpm 125 mm 500 x <tr td=""> x</tr>		GWS 7-100 Profession	al	

10

SMALL ANGLE GRINDERS

SMALL ANGLE GRINDER GWS 7-115 Professional



Technical data		
Part number	0 601 388	
Rated input power	720 W	
No-load speed	11.000 rpm	
Disc diameter	115 mm	
Grinding spindle thread	M 14	
Switch	2-way	
Weight	1.9 kg	
Comes complete with	164	174
Auxiliary handle (1 602 025 024)	-	x
Backing flange (spare part number 2 605 703 014)	x	х
Locking nut (1 603 340 040)	x	x
Protective guard (1 619 P06 547)	х	x
Two-hole spanner (1 607 950 043)	x	x
Two-hole spanner (spare part number 1 607 950 060)	x	-
Voltage 110 V	x	-
Voltage 240 V	-	x

SMALL ANGLE GRINDER

GWS 880 Professional



Technical data		
Part number	0 601 396	
Rated input power	880 W	
No-load speed	11.000 rpm	
Grinding spindle thread	M 14	
Switch	2-way	
Weight	1.9 kg	
Comes complete with	064	074
Auxiliary handle (spare part number 2 602 025 067)	x	х
Backing flange (spare part number 2 605 703 014)	x	x
Carrying case (6 035 970 318)	x	x
Diamond cutting disc, 115 mm (2 608 602 191)	х	х
Locking nut (spare part number 1 603 345 043)	х	х
Protective guard (spare part number 1 605 510 250)	x	x
Two-hole spanner (spare part number 1 619 P08 927)	x	x

SMALL ANGLE GRINDER GWS 9-115 S Professional



SMALL ANGLE GRINDER GWS 9-115 S Professional

PROTECTION



Technical data	
Part number	0 601 396
Rated input power	900 W
No-load speed	2.800 - 11.000 rpm
Disc diameter	115 mm
Grinding spindle thread	M 14
Switch	2-way
Weight	1.9 kg
Comes complete with	171
Auxiliary handle	x
Backing flange	x
Cardboard box	x
Locking nut	x
Protective guard	x
Two-hole spanners	x

SMALL ANGLE GRINDERS

SMALL ANGLE GRINDER GWS 9-115 P Professional



Technical data		
Part number	0 601 790	
Rated input power	900 W	
No-load speed	11.500 rpm	
Disc diameter	115 mm	
Grinding spindle thread	M 14	
Switch	PROtection	
Weight	2.1 kg	
Comes complete with	260	270
Auxiliary handle (1 602 025 024)	x	x
Backing flange (spare part number 2 605 703 014)	x	x
Locking nut (1 603 340 040)	x	x
Protective guard (1 605 510 364)	x	x
Two-hole spanner (1 607 950 043)	x	x
Voltage 110 V	x	-
Voltage 240 V	-	x

SMALL ANGLE GRINDER GWS 11-125 Professional

M





recifical uata		
Part number	0 601 79D	
Rated input power	1,100 W	
No-load speed	11.500 rpm	
Disc diameter	125 mm	
Grinding spindle thread	M 14	
Switch	2-way	
Weight	2.2 kg	
Comes complete with	060	070
Auxiliary handle	х	x
Backing flange (spare part number 2 605 703 014)	x	x
Locking nut (1 603 340 040)	x	x
Protective guard (1 605 510 365)	x	x
Two-hole spanner (1 607 950 043)	x	x
Voltage 110 V	х	-
Voltage 240 V	-	x

SMALL ANGLE GRINDER GWS 11-125 P Professional



Part number	0 601 792	
Rated input power	1,100 W	
No-load speed	11.500 rpm	
Disc diameter	125 mm	
Grinding spindle thread	M 14	
Switch	PROtection	
Weight	2.3 kg	
Comes complete with	260	270
Auxiliary handle (1 602 025 024)	х	x
Backing flange (spare part number 2 605 703 014)	x	x
Locking nut (1 603 340 040)	х	x
Protective guard (1 605 510 365)	х	x
Two-hole spanner (1 607 950 043)	х	x
Voltage 110 V	х	-
Voltage 240 V	-	x

SMALL ANGLE GRINDER GWS 12-125 CI Professional



SMALL ANGLE GRINDERS, SYSTEM ACCESSORY FOR SMALL ANGLE GRINDERS

SMALL ANGLE GRINDE	R	SMALL ANGLE GRINDI	ER	
GWS 13-125 CI Profess	ional	GWX 750-115 Professi	onal	NEW!
Image: Second system Image: Second system	0 601 79E	Image: Second state Image: Second state Part number	06017C9	
Rated input power No-load speed	1,300 W 11.500 rpm	Rated input power No-load speed	750 W 11.000 rpm	
Disc diameter	125 mm	Disc diameter	115 mm	
Grinding spindle thread	M 14	Switch	2-way	
Switch	2-way	Weight	2 kg	
Weight	2.3 kg	Comes complete with	060	070
Comes complete with	077	Auxiliary handle (1 602 025 024)	х	x
Backing flange (spare part number	x	Cardboard box	х	x
2 605 703 014)		Protective guard (2 608 000 677)	x	x
Carrying case (2 605 438 170)	x			
Protective guard (1 605 510 365)	x			
SDS quick-locking nut (1 603 340 031)	x			
Vibration Control auxiliary handle (2 602 025 171)	x			
Voltage 240 V	x			
SMALL ANGLE GRINDE		SYSTEM ACCESSORY I	50.0	
GWX 9-115 S Professio	onal	SMALL ANGLE GRIND		
		GDE 125 EA-S Professi	ional	
Technical data		Technical data	4 000 111	
Part number	0 601 7B1	Part number	1 600 A00	^
Rated input power	900 W	Compatible with	GWS 600 - GWS 88 GWS 6-125;	0;
No-load speed	2.800 – 11.000 rpm		GWS 6-125; GWS 7-125;	
Disc diameter	115 mm		GWS 18V-125 LI	
Switch	2-way	14/- : - F. F	200 -	
Weight	2.1 kg	Weight	300 g	
Comes complete with	060 070	Comes complete with Cardboard box	3DH	
Auxiliary handle (spare part number 2 602 025 067)	x x		x	
Cardboard box	Y Y			

х

х

Cardboard box

Protective guard (2 608 000 677)

Professional Power Tools for Trade & Industry | 185

SYSTEM ACCESSORIES FOR SMALL ANGLE GRINDERS

SYSTEM ACCESSORY FOR SMALL ANGLE GRINDERS GDE 125 EA-T Professional

۱

Technical data

Compatible with

art numbe

Weight

Comes con

Cardboard box

nplete with



GWX ...-125; GWX 14V ... (Ø 125mm); GWS 9-125; GWS 11-125 - GWS 19-125; GWS 1000 - GWS 1400; GWS 18V-10 (Ø 125mm); GWS 18V-15 (Ø 125mm); GWS 18V-125

1 600 A00

300 g

х

.. 3DJ


SYSTEM ACCESSORY FOR SMALL ANGLE GRINDERS GDE 115/125 FC-T Professional



Weight Comes co

Cardboard box

mplete with



700 g

... 3DK



STRAIGHT GRINDERS AND POLISHERS

The straight grinders from Bosch deliver precise results and are versatile – even in hard-to-reach areas.



GGS 8 CE Professional

(see page 189)

- ► 750 W motor with soft start facilitates fast work progress
- High torque and handy design ideal for use on surfaces with flap wheels, brushes, and other accessories
- Increased user protection due to KickBack Control feature

10

CORDLESS STRAIGHT GRINDERS

CORDLESS STRAIGHT GRINDER

GGS 18 V-LI Professional



Part number	0 601 9B5
No-load speed	22,000 rpm
Tool holder	Collet up to 8 mm diameter
Comes complete with	303
2 x spanner 19 mm (spare part number 3 607 950 024)	X
L-BOXX 136 (1 600 A01 2G0)	x
L-BOXX inlay for GGS 18 V-LI	x

CORDLESS STRAIGHT GRINDER GGS 18 V-LI Professional



i arc number	0 001 000
No-load speed	22,000 rpm
Tool holder	Collet up to 8 mm diameter
Comes complete with	300
2 x spanner 19 mm (spare part number 3 607 950 024)	Х
Cardboard box	х

CORDLESS STRAIGHT GRINDER GGS 18V-10 SLC Professional





CORDLESS STRAIGHT GRINDER, STRAIGHT GRINDERS



STRAIGHT GRINDER GGS 28 LC Professional



Technical data		
Part number	0 601 221	
Rated input power	650 W	
No-load speed	30.000 rpm	
Tool holder	Collets up to	8 mm diameter
Switch	2-way	
Weight	1.6 kg	
Comes complete with	060	070
Collet 6 mm (2 608 570 084)	x	х
Spanner 13 mm (spare part number 3 607 950 025)	x	x
Spanner 19 mm (spare part number 3 607 950 024)	x	x
Voltage 110 V	x	-
Voltage 240 V	-	x

STRAIGHT GRINDER GGS 8 CE Professional



STRAIGHT GRINDER, POLISHER

STRAIGHT GRINDER GGS 8 H Professional



No-load speed	8,000 rpm
Weight	4.4 kg
Tool holder	Collet up to 20 mm diameter
Comes complete with	260
Holding pin (0603 101 017)	x
Round nut (3 603 345 014)	x
SDS quick-locking nut for conical discs (3 603 301 011)	X
Protective guard (3 605 510 014)	x
Allen key KW 6 (1 907 950 007)	x
Cardboard box	x
Voltage 110 V	x

POLISHER GPO 14 CE Professional



Part number	0 601 389	
Rated input power	1,400 W	
No-load speed	750 – 3.000 rpm	
Grinding spindle thread	M 14	
Cup wheel, diameter	180 mm	
Rubber sanding plate, diameter	180 mm	
Wire cup brush, diameter	100 mm	
Cup wheel, diameter	180 mm	
Polishing sponge, diameter	160 mm	
Surface brush, diameter	175 mm	
Weight	2.5 kg	
Comes complete with	060	070
Auxiliary handle (spare part number 2 602 025 067)	x	x
D-handle (spare part number 1 619 P07 563)	х	x
Voltage 110 V	х	-
Voltage 240 V	-	х



SHEARS, NIBBLERS AND CUTTING GRINDERS

Metalworking from Bosch: Powerful and handy shears for cutting metal plates, for example, as well as for curved cuts.

CORDLESS SHEAR GUS 12V-300 Professional



CORDLESS SHEAR GUS 12V-300 Professional



CORDLESS SHEARS, NIBBLER

CORDLESS SHEAR GSC 12V-13 Professional



Technical data		
Part number	0 601 926	
Battery voltage	12 V	
Cutting capacity in steel (800 N/mm ²), max.	0.6 mm	
Cutting capacity in steel (600 N/mm ²), max.	0.8 mm	
Cutting capacity in steel (400 N/mm ²), max.	1.3 mm	
Cutting capacity in aluminium (250 N/mm ²), max.	2.0 mm	
No-load stroke rate	3.600 spm	
Weight excl. battery	1.4 kg	
Comes complete with	175	105
Alignment gauge	x	х
Allen key	х	x
L-BOXX 102 (0600 A00 1RP)	х	-
GAL 1230 CV quick charger (2 607 225 136)	x	-
1/1 LBOXX inlay for tool and charger (0600 A00 2V0)	x	-
2 x 2.0 Ah Li-Ion batteries (0600 Z00 02X)	х	-
Cardboard box	-	x

CORDLESS SHEAR GSC 18V-16 Professional



i art number	0 001 320
Battery voltage	18 V
Cutting capacity in steel (400 N/mm ²), max.	1.6 mm
Cutting capacity in steel (600 N/mm²), max.	1 mm
Cutting capacity in steel (800 N/mm ²), max.	0.7 mm
Cutting capacity in aluminium (250 N/mm ²), max.	2.0 mm
No-load stroke rate	3,400 spm
Weight excl. battery	1.5 kg
Comes complete with	200
· · ·	·
Comes complete with	200

NIBBLER **GNA 18V-16 Professional**







_		 			 		 	 					 	 					 				
			_									-										+	-
		 				 	 		 		 								 			—	
							 												 			—	
			_									_										+	
							 					_											_
																			 			—	
																						+	
		 	_			 	 	 	 		 	_					-		 _				
							 															—	
																						-	_
			_																			-	
			_				 					_							_				_
		 				 	 	 	 		 								 			—	
																					\square	\perp	
																						-	
																						+	-
																					-+	+	
							 												 		-+		
																					\square	\downarrow	
]]]]]]	Ī		Ī					
																					-	+	
																							_







DUST EXTRACTORS, GLUE GUNS AND HEAT GUNS

Bosch Professional knows how important a clean job site is for health and safety. That's why our dust extractors keep them that way and with our glue guns and heat guns, we offer unequalled precision.

	Summary of contents
198	Wet/dry dust extractors
198	Heat guns
198	Cordless blower

DUST EXTRACTORS, GLUE GUNS AND HEAT GUNS

ß

WET/DRY DUST EXTRACTORS

WET/DRY DUST EXTRACTOR

GAS 12V Professional



Technical data	
Part number	0 601 9E3
Battery voltage	12 V
Container volume	0.35
Filter surface area	408 cm ²
Max. vacuum pressure (turbine)	45 mbar
Max. airflow rate (turbine)	15.0 l/s
Comes complete with	000
1 x flat-pleated filter (2 607 432 046)	х
Crevice nozzle (spare part number 1 600 A00 2PP)	X

WET/DRY DUST EXTRACTOR GAS 18V-1 Professional



Technical data		
Part number	0 601 9C6	
Battery voltage	18 V	
Container volume	0.70	
Filter surface area	55 cm ²	
Max. vacuum pressure (turbine)	60 mbar	
Max. airflow rate (turbine)	10.0 l/s	
Comes complete with	200	
Comes complete with 2 x suction tubes	200 x	
-		
2 x suction tubes	х	
2 x suction tubes Crevice nozzle	x x	
2 x suction tubes Crevice nozzle Flexible extension tube	x x x	

WET/DRY DUST EXTRACTOR GAS 18V-10 L Professional





	100	
IT HT		
1.5		
	100	

XXX manufacture	
Technical data	
Part number	0 601 9C6
Battery voltage	18 V
Filter surface area	2,375 cm ²
Max. vacuum pressure (turbine)	90 mbar
Max. airflow rate (turbine)	24.0 l/s
Comes complete with	302
1 x 1.6 m hose (2 608 000 658)	х
1 x crevice nozzle, 250 mm (2 608 000 661)	x
1 x elbow pipe (2 608 000 659)	х
1 x flat-pleated filter (2 608 000 663)	x
1 x floor nozzle (2 608 000 707)	х
1 x power tool adapter (2 608 000 708)	x
1 x shoulder strap (2 608 000 706)	х
3-piece suction pipe set (2 608 000 660)	x
4-piece casters set (2 608 000 705)	х
Cardboard box	х

WET/DRY DUST EXTRACTOR GAS 18V-10 L Professional



DUST EXTRACTORS, GLUE GUNS AND HEAT GUNS

WET/DRY DUST EXTRACTORS

WET/DRY DUST EXTRACTOR GAS 20 L SFC Professional

SFC



	•
Technical data	
Part number	0 601 97B
Max. input power	1,200 W
Max. vacuum pressure (turbine)	215 mbar
Max. airflow rate (turbine)	62 l/s
Dust class of wet/dry extractor	L
Container volume, gross	191
Comes complete with	070
1 x pleated filter (2 607 432 024)	x
2 x dust extraction pipe length 0.5 m, diameter 35 mm (2 607 002 631)	x
3 m universal hose, 38 mm diameter (1 600 A00 0JF)	x
Coarse dirt nozzle, 35 mm diameter (2 607 000 170)	х
Crevice nozzle, 35 mm diameter (2 607 000 165)	х
Dust extraction bag (2 605 411 231)	x
Suction regulator control (2 607 002 630)	x
Universal power tool adapter (2 607 002 632)	x

WET/DRY DUST EXTRACTOR

GAS 25 L SFC Professional

SFC



Technical data		
Part number	0 601 979	
Max. input power	1,200 W	
Max. vacuum pressure (turbine)	248 mbar	
Max. airflow rate (turbine)	61 l/s	
Dust class of wet/dry extractor	L	
Container volume, gross	25 I	
Comes complete with	141	142
1 x polyester filter (2 607 432 015)	х	х
2 x dust extraction pipe length 0.5 m, diameter 35 mm (2 607 000 162)	х	х
3 m hose, 35 mm diameter (2 609 390 392)	х	х
Coarse dirt nozzle, 35 mm diameter (2 607 000 170)	х	х
Crevice nozzle, 35 mm diameter (2 607 000 165)	x	x
Floor nozzle set, 35 mm diameter (1 609 390 478)	х	x
Paper dust bag (2 605 411 167)	x	x
Suction regulator control (2 607 000 164)	х	Х
Voltage 110 V	х	-
Voltage 240 V	-	х

WET/DRY DUST EXTRACTOR GAS 35 L SFC+ Professional





Technical data	
Part number	0 601 9C3
Max. input power	1,380 W
Max. vacuum pressure (turbine)	254 mbar
Max. airflow rate (turbine)	74 l/s
Dust class of wet/dry extractor	L
Container volume, gross	35 I
Comes complete with	060
1 x cellulose flat-pleated filter (2 607 432 033)	x
3 m hose, 35 mm diameter, with power tool adapter (2 608 000 569)	x
3 x 0.35 m chrome-plated suction tube, 35 mm diameter (2 608 000 575)	x
Crevice nozzle, 35 mm diameter (2 607 000 165)	x
Disposal bag (2 607 432 043)	x
Elbow (2 608 000 573)	x
Floor nozzle set, 35 mm diameter (1 609 390 478)	x
SFC+ module	x
Voltage 240 V	x

WET/DRY DUST EXTRACTOR GAS 35 M AFC Professional

AFC 👔 🏂 👔



Technical data		
Part number	0 601 9C3	
Max. input power	1,380 W	
Max. vacuum pressure (turbine)	254 mbar	
Max. airflow rate (turbine)	74 l/s	
Dust class of wet/dry extractor	M	
Container volume, gross	35 I	
Comes complete with	160	170
1 x PES flat-pleated filter (2 607 432 034)	х	x
3 x 0.35 m chrome-plated suction tube, 35 mm diameter (2 608 000 575)	x	x
5 m hose, 35 mm diameter, antistatic, with power tool adapter (2 608 000 566)	x	x
Crevice nozzle, 35 mm diameter (2 607 000 165)	х	x
Disposal bag (2 607 432 043)	x	x
Elbow (2 608 000 573)	x	x
Floor nozzle set, 35 mm diameter (1 609 390 478)	x	x
Voltage 110 V	-	x
Voltage 240 V	x	-

DUST EXTRACTORS, GLUE GUNS AND HEAT GUNS

HEAT GUN

GHG 23-66 110V Professional

WET/DRY DUST EXTRACTOR, HEAT GUNS, CORDLESS BLOWER

WET/DRY DUST EXTRACTOR

GAS 55 M AFC Professional

AFC 🕅 🏂 🖡



Technical data	
Part number	0 601 9C3
Max. input power	1,380 W
Max. vacuum pressure (turbine)	254 mbar
Max. airflow rate (turbine)	74 l/s
Dust class of wet/dry extractor	Μ
Container volume, gross	55 I
Comes complete with	360
1 x PES flat-pleated filter (2 607 432 034)	x
3 x 0.35 m chrome-plated suction tube, 35 mm diameter (2 608 000 575)	X
5 m hose, 35 mm diameter, antistatic, with power tool adapter (2 608 000 566)	X
Crevice nozzle, 35 mm diameter (2 607 000 165)	X
Disposal bag (2 607 432 043)	x
Elbow (2 608 000 573)	x
Floor nozzle set, 35 mm diameter (1 609 390 478)	x
Voltage 240 V	x

	~
SPEED SPEED	
Technical data	
Part number	0 601 2A6
Rated input power	2,300 W
Working temperature	50 - 650 °C
Airflow	150 – 500 l/min
Weight	0.7 kg
Comes complete with	360
Glass protection nozzle 75 mm (1 609 390 452)	x
Surface nozzle 50 mm (1 609 201 795)	х

HEAT GUN GHG 23-66 Professional



CORDLESS BLOWER GBL 18V-120 Professional



Battery voltage	18 V
No-load speed	17.000 rpm
Max. air speed	75 m/s
Max. airflow	120 m³/h
Runtime	Speed I : 9 min/Ah; Speed II : 5 min/Ah
Weight excl. battery	1.1 kg
Comes complete with	100
4 x Accessories (Nozzle, Extension tube, Deep hole Nozzle, Dust Collection Tube)	х





					1															\neg	
																				-	
				+																	
					1															-	
		-																		-	
	+				+															\neg	
		-			1															\neg	_
	+			-	1															\neg	
				-	1															\neg	
		+			1															\neg	
	+				+															\neg	
		-			1															\neg	
	+			-	1															\neg	
	\neg			-	1															\neg	
	-				1															-	
				1																	
				-	1																
				+													 				_
																				\neg	
																				-	
				1																	
				1																-	
																				_	
																				\neg	
																				\neg	
																				_	
					1															\neg	
					1															\neg	
																				\neg	
	\top				1															\neg	
																				-	
																				_	
																				-	
				+													 			\neg	
			1		1																\rightarrow







Solutions by Bosch Professional make your job site both more efficient and more enjoyable – with a range of useful accessories such as lighting, sound systems and the heated work wear.

	Summary of contents
204	Cordless worklights
205	Cordless radios
205	Heated work wear

CORDLESS WORKLIGHTS

CORDLESS WORKLIGHT GLI 12V-80 Professional



Technical data		
Part number	0 601 437	
Battery voltage	12 V	
Max. operating time 12 V	590 mins/Ah	
Weight excl. battery	0.14 kg	
Comes complete with	V00	
Cardboard box	х	

CORDLESS WORKLIGHT GLI 12V-300 Professional



300 LUMEN

rechnical data	
Part number	0 601 4A1
Battery voltage	12 V
Run time	180 mins/Ah
Weight excl. battery	0.15 kg
Comes complete with	000
Cardboard box	x

CORDLESS WORKLIGHT GLI 12V-330 Professional



CORDLESS WORKLIGHT GLI 18V-300 Professional



CORDLESS WORKLIGHTS

CORDLESS WORKLIGHT GLI 18V-1200 C Professional





0 601 446
14,4–18 V
130 mins/Ah
1.4 kg
700
x



Part r Batter Max. o Max. o Weigh

Card

CORDLESS WORKLIGHT

GLI 18V-1900 Professional



	-	
nical data		
number	0 601 446	
ery voltage	14,4–18 V	
operating time 14.4 V	80 mins/Ah	
operating time 18 V	100 mins/Ah	
ht excl. battery	1.6 kg	
es complete with	400	
board box	x	

CORDLESS WORKLIGHT GLI 18V-2200 C Professional



CORDLESS WORKLIGHT GLI 18V-4000 C Professional



|--|

Part number	0 601 446
Battery voltage	18 V
Max. operating time 18 V	30 mins/Ah
Weight excl. battery	2 kg
Comes complete with	800
Cardboard box	×

NEW!

CORDLESS WORKLIGHTS, CORDLESS RADIOS

CORDLESS WORKLIGH GLI 18V-10000 C Profes		CORDLESS WORKLIGH	
Technical data Part number Battery voltage Max. operating time 18 V Weight excl. battery Comes complete with Cardboard box	0 601 446 18 V 12.5 mins/Ah 3.9 kg 900 X	Technical data Part number Battery voltage Max. operating time 14.4 V Max. operating time 18 V Weight excl. battery Comes complete with	0 601 443 14,4–18 V 115 mins/Ah 135 mins/Ah 0.3 kg 400
		Belt clip (spare part number 2 601 329 113)	X

CORDLESS RADIO GML SoundBoxx Professional





Technical data	
Part number	0 601 429
Radio frequency range AM	531 – 1.602 kHz
Radio frequency range FM	87,5 – 108 MHz
Input voltage(s), mains	100 – 240 V
Comes complete with	970
2 x 1.5 V LR03 battery (AAA)	x
Aux-In cable	x
Cardboard box	x
DC-in adapter (spare part number 1 600 A00 0ZT)	-
DC-in adapter (spare part number 1 600 A00 0ZU)	X

CORDLESS RADIO GML 20 Professional



CORDLESS RADIOS, HEATED WORK WEAR

CORDLESS RADIO GML 50 Professional

LI-ION 14.4/ 18 V AUX IN AM/ FM FREEREY



Technical data	
Part number	0 601 429
Radio frequency range AM	531 – 1.602 kHz
Radio frequency range FM	87,5 – 108 MHz
Input voltage(s), mains	230 V
Input voltage(s), battery	14,4 - 18 V
Rated power of amplifier (in mains operation)	50 W
Comes complete with	670
Comes complete with 2 x 1.5 V LR6 battery (AA)	670 x
2 x 1.5 V LR6 battery (AA)	x
2 x 1.5 V LR6 battery (AA) Aux-In cable	x x
2 x 1.5 V LR6 battery (AA) Aux-In cable Cardboard box	x x x
2 x 1.5 V LR6 battery (AA) Aux-In cable Cardboard box Integrated battery charger	x x x x x



 Image: Constraint of the second se

CORDLESS RADIO

GPB 12V-10 Professional

Technical data	
Part number	0 601 429
Radio frequency range AM	531 – 1.602 kHz
Radio frequency range FM	87,5 – 108 MHz
Input voltage(s), mains	100 – 240 V
Comes complete with	270
2 x 1.5 V LR03 battery (AAA)	x
Aux-In cable	х
Cardboard box	х
DC-in adapter (spare part number 1 600 A00 0ZU)	X

HEATED WORK WEAR GHJ 12+18V Unisex (Basic Version) Professional



12





Every detail of a construction project should be considered right from the very start. Digital measuring tools by Bosch Professional allow you to measure, align and detect with absolute precision.

	Summary of contents
208	MT brand page
212	Laser measures
213	Measuring wheels
214	Inclinometers
216	Thermo detectors
217	Metal detectors
218	Inspection cameras
218	Inspection camera accessories
220	Point lasers
222	Combi lasers
224	Line lasers
227	Optical levels
228	Accessories

13



UPGRADE YOURSELF.

Connect your smartphone or tablet to the newest generation of Bosch Professional Measuring Tools.





Transfer measuring results to your smart device and easily manage documentation, planning and quotation preparation.

Remotely control your levelling device and avoid unnecessary movement and inaccuracies caused by touching the tool.

► DOCUMENTATION:

Our laser measures and thermo detectors deliver data to your smartphone or tablet, where you can then use the Measuring Master app to document it. This saves time and makes your work more efficient.

► QUOTATION PREPARATION:

With the Measuring Master app, you can convert your measurements into a PDF document, which you can then send straight off from your smartphone or tablet.

► CONTROL:

Via the Bosch Levelling Remote app, our combi and line lasers can be adjusted quickly and precisely from your smartphone, even from far away.



MEASURING TASKS

The laser measures from Bosch are ideal for every professional user who wants to take exact measurements quickly: Equipped with state-of-the-art laser technology, Bosch measures deliver results with maximum precision and reliability.



GLM 50 C Professional

(see page 211)

- Quick and efficient data transfer and documentation due to [®]Bluetooth connectivity and Bosch Measuring Master App
- Broad range of functions includes stake-out function and 360° tilt sensor
- ► Easy handling with the simple user interface combined with an illuminated, rotating colour display

LASER MEASURES

LASER MEASURE **GLM 30 Professional**





Technical data	_
Part number	0 601 072
Measurement accuracy, typical	± 2.0 mm (plus use-dependent deviation)
Measurement range	0,15 - 30,00 m
Integrated incline measurement	-
Laser diode	635 nm, < 1 mW
Laser class	2
Measurement range	0,15 - 30,00 m
Units of measurement	ft/inch
Dust and splash protection	IP 54
Comes complete with	570
2 x 1.5 V LR03 battery (AAA)	x
Manufacturer's certificate	x
Protective Bag	x

LASER MEASURE **GLM 40 Professional**





Technical data



Technical data	
Part number	0 601 072
Measurement accuracy, typical	± 1.5 mm (plus use-dependent deviation)
Measurement range	0,15 - 40,00 m
Integrated incline measurement	-
Memory capacity (values)	10
Laser diode	635 nm, < 1 mW
Laser class	2
Measurement range	0,15 - 40,00 m
Units of measurement	m/cm, ft/inch
Dust and splash protection	IP 54
Comes complete with	900
2 x 1.5 V LR03 battery (AAA)	x
Manufacturer's certificate	х
Protective Bag	x

LASER MEASURE **GLM 50 C Professional**



LASER MEASURE **GLM 80 Professional**



Technical data	
Part number	0 601 072
Measurement accuracy, typical	± 1.5 mm (plus use-dependent deviation)
Measurement range	0,05 - 80,00 m
Integrated incline measurement	x
Memory capacity (values)	20 + 1
Laser diode	635 nm, < 1 mW
Laser class	2
Measurement range	0,05 – 80,00 m
Units of measurement	m/cm/mm
Dust and splash protection	IP 54
Comes complete with	370
1 x battery 1.25 Ah Li-ion	x
1 x battery 1.25 Ah Li-ion Charger (2 609 120 421)	x x
Charger (2 609 120 421)	x
Charger (2 609 120 421) Manufacturer's certificate	x x
Charger (2 609 120 421) Manufacturer's certificate	x x
Charger (2 609 120 421) Manufacturer's certificate	x x
Charger (2 609 120 421) Manufacturer's certificate	x x
Charger (2 609 120 421) Manufacturer's certificate	x x
Charger (2 609 120 421) Manufacturer's certificate	x x

LASER MEASURES, MEASURING WHEEL

T

LASER MEASURE GLM 80 + R 60 Professional

	2
■ 100 100 100 100 100 100 100 100 100 10	
ISO NORM 16331-1	6

0 601 072
± 1.5 mm (plus use-dependent deviation)
0,05 – 80,00 m
х
20 + 1
635 nm, < 1 mW
2
0,05 – 80,00 m
m/cm/mm
IP 54
371
х
х
x
х
x

LASER MEASURE	
GLM 120 C Professional	





Technical data		
Part number	0 601 072	
Measurement accuracy, typical	± 1.5 mm (plu:	s use-dependent deviation)
Measurement range	0,08 - 120,00	m
Integrated incline measurement	x	
Memory capacity (values)	50	
Laser diode	650 nm, < 1 m	W
Laser class	2	
Measurement range	0,08 - 120,00	m
Units of measurement	m/cm/mm/ft/i	nch/ft-inch
Dust and splash protection	IP 54	
Comes complete with	F70	F71
Building tripod BT 150 Professional (0 601 096 B00)	-	x
	- x	x x
(0 601 096 800)	- x x	
(0 601 096 B00) Carrying Strap		x
(0 601 096 B00) Carrying Strap Manufacturer's certificate	x	x x
(0 601 096 B00) Carrying Strap Manufacturer's certificate Micro USB cable	x x	x x x
(0 601 096 B00) Carrying Strap Manufacturer's certificate Micro USB cable Micro USB charger	x x x	x x x x
(0 601 096 B00) Carrying Strap Manufacturer's certificate Micro USB cable Micro USB charger	x x x	x x x x
(0 601 096 B00) Carrying Strap Manufacturer's certificate Micro USB cable Micro USB charger	x x x	x x x x


LASER MEASURE **GLM 250 VF Professional**



MEASURING WHEEL GWM 32 Professional



MEASURING WHEEL, ANGLE MEASURERS

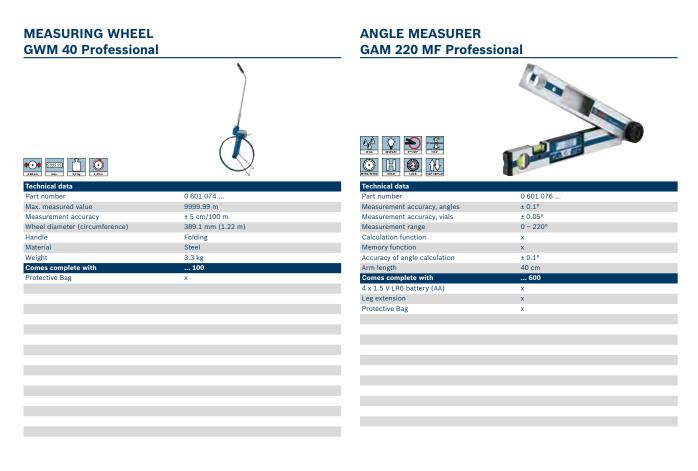

ANGLE MEASURER GAM 220 Professional



ANGLE MEASURER GAM 270 MFL Professional



loominour uutu	
Part number	0 601 076
Measurement accuracy, angles	± 0.1°
Measurement range	0-270°
Calculation function	x
Memory function	x
Arm length	60 cm
Comes complete with	400
4 x 1.5 V LR6 battery (AA)	x
Leg extension	x
Protective Bag	x

INCLINOMETERS

INCLINOMETER GIM 60 Professional





Technical data	
Part number	0 601 076
Length	60 cm
Measurement range	0 - 360° (4 x 90°)
Electronics measurement accuracy 0°/90°	± 0.05°
Electronics measuring accuracy at 1– 89°	± 0.2°
Comes complete with	700
4 x 1.5 V LR6 battery (AA)	x
Protective Bag	x

INCLINOMETER GIM 60 L Professional



Technical data	
Part number	0 601 076
Length	60 cm
Working range (laser)	30 m
Measurement range	0 - 360° (4 x 90°)
Electronics measurement accuracy 0°/90°	± 0.05°
Electronics measuring accuracy at 1-89°	± 0.1°
Comes complete with	900
Comes complete with 4 x 1.5 V LR03 battery (AAA)	900 x
-	
4 x 1.5 V LR03 battery (AAA)	x
4 x 1.5 V LR03 battery (AAA)	x

INCLINOMETER GIM 120 Professional



13



DETECTION TASKS

Always on the safe side: With the professional detectors from Bosch, you will find magnetic and non-magnetic metals, power cables, wooden substructures or even plastic pipes with maximum reliability and safety.

THERMO	D	ETECTOR
GTC 400	С	Professional

L-BOXX inlay for tool

Micro USB cable (2 609 120 670) Quick charger GAL 12V-40 Professional (1 600 A01 9R4)



V		y
	5	

	Technical data
0 601 083	Part number
-10 °C to +400 °C	Measurement range
±3.0 °C	Measuring accuracy of
0.1 °C	Resolution
4 x 1.5 V LR6 (AA) 1 x GBA 12V 1 x GBA 10.8V	Power supply and run
500	Frame buffer (number
Internal memory	Memory type
MicroUSB; Wi-Fi	Data transfer
0.5 kg	Weight
171	Comes complete with
x	Hand strap
x	L-BOXX 136 (1 600 A0
x	L-BOXX inlay accessori
x	L-BOXX inlay for tool
x	Micro USB cable (2 60
x	
x	

THERMO DETECTOR GTC 400 C Professional		NEW!
Technical data		
Part number	0 601 083	
Measurement range	-10 °C to +400 °C	
Measuring accuracy of IR	±3.0 °C	
Resolution	0.1 °C	
Power supply and runtime	4 x 1.5 V LR6 (AA) 1 x GBA 12V 1 x GBA 10.8V	
Frame buffer (number of images)	500	
Memory type	Internal memory	
Data transfer	MicroUSB; Wi-Fi	
Weight	0.5 kg	
Comes complete with	108	
Hand strap	x	
L-BOXX 136 (1 600 A01 2G0)	x	
L-BOXX inlay accessories	x	
L-BOXX inlay for tool	x	
Micro USB cable (2 609 120 670)	x	

THERMO DETECTOR, METAL DETECTORS

THERMO DETECTOR GIS 1000 C Professional



Technical data	
Part number	0 601 083
Measurement range	-40 °C +1000 °C
Measuring accuracy of IR	±1.0 °C
Measuring accuracy of relative humidity	± 2 %
Optics (Ratio of meas. distance : meas. spot)	50:1
Resolution	0.1 °C
Laser diode	Laser class 2, 635 nm
Frame buffer (number of images)	>200
Memory type	Internal memory
Data transfer	MicroUSB; Bluetooth™; Bluetooth™ Smart
Weight	0.6 kg
Comes complete with	370
4 x 1.5 V LR6 battery (AA)	x
Cardboard box	x
Carrying bag	x
Micro USB cable (2 609 120 670)	x

METAL DETECTOR GMS 120 Professional



METAL DETECTOR D-tect 120 wallscanner Professional



METAL DETECTORS, INSPECTION CAMERA



METAL DETECTOR D-tect 150 SV wallscanner Professional



INSPECTION CAMERA GIC 120 Professional



Display recording	020 x 210 px
Diameter of camera head	8.5 mm
Length of camera cable	120 cm
Comes complete with	100
4 x 1.5 V LR6 battery (AA)	x
Camera cable for GIC 120 C, 8.5 mm diameter, 120 cm long (1 600 A00 9B9)	x
Hook, magnet, mirror	x

INSPECTION CAMERA, INSPECTION CAMERA ACCESSORIES

INSPECTION CAMERA GIC 120 C Professional





Technical data	
Part number	0 601 241
Battery voltage	12 V
Display size	3.5 "
Display resolution	320 x 240 px
Diameter of camera head	8.5 mm
Length of camera cable	120 cm
Comes complete with	200
4 x 1.5 V LR6 battery (AA)	x
4GB MicroSD card	x
AA1 alkaline battery adapter (1 608 M00 C1B)	x
Camera cable for GIC 120 C, 8.5 mm diameter, 120 cm long (1 600 A00 9B9)	x
Hook, magnet, mirror	x
L-BOXX inlay	x
Micro USB cable	x

INSPECTION CAMERA ACCESSORY 8.5 mm camera head (300 cm) Professional



Technical data		
Part number	1 600 A00	
Display resolution	320 x 240 px	
Diameter of camera head	8.5 mm	
Length of camera cable	300 cm	
Comes complete with	9BA	
-	-	

INSPECTION CAMERA ACCESSORY 8.5 mm camera head (120 cm) Professional





LEVELLING TASKS

Extremely versatile – precise laser lines and practical plumb points. Combination lasers enable you to perform all common levelling and transfer applications with only one tool. These self-levelling lasers are aligned quickly and precisely and deliver exact results thanks to their easy handling.



GCL 2-50 CG Professional

(see page 221)

- Bright green horizontal and vertical laser lines and two centred plumb points offer optimal visibility
- Bluetooth[®]-connection paired with Levelling Remote App offers remote-control adjustment of the tool via a smartphone
- ► Dual Power Source allows for the use of 12 V Li-ion battery or standard alkaline batteries

POINT LASERS, COMBI LASERS

POINT LASER GPL 3 Professional



Technical data	
Part number	0 601 066
Projection	3 points
Accuracy	± 0.3 mm/m
Working range	30 m
Self-levelling range	± 5° longitudinal axis, ± 3° traverse axis
Dust and splash protection	IP 5X
Comes complete with	100
3 x 1.5 V LR6 battery (AA)	х
Multifunctional mount (spare part number 1 618 C00 465)	X
Protective Bag	x

POINT LASER

GPL 5 Professional



Technical data	
Part number	0 601 066
Projection	5 points
Accuracy	± 0.3 mm/m
Working range	30 m
Self-levelling range	± 5° longitudinal axis, ± 3° traverse axis
Dust and splash protection	IP 5X
Comes complete with	200
3 x 1.5 V LR6 battery (AA)	x
Multifunctional mount (spare part number 1 618 C00 465)	X
Protective Bag	x

COMBI LASER GCL 2-15 Professional





COMBI LASER GCL 2-15 G Professional



0 601 066	
2 lines / 2 points	
± 0.3 mm/m	
15 m	
± 4°	
IP 54	
0 601 066 E00	0 601 066 E02
х	х
х	x
-	-
-	x
-	x
х	х
х	-
х	x
	2 lines / 2 points ± 0.3 mm/m 15 m ± 4° 19 54 0 601 066 E00 X X X - - - x X X

Technical data	
Part number	0 601 066
Projection	2 lines / 2 points
Accuracy	± 0.3 mm/m
Working range	15 m
Self-levelling range	± 4°
Dust and splash protection	IP 54
Comes complete with	J00
1/2 L-BOXX inlay for tool (1 608 M00 C1S)	х
3 x 1.5 V LR6 battery (AA)	х
Carrying case	х
Laser target plate	х
Rotating mount RM 1 Professional (0 601 092 600)	х

COMBI LASERS

COMBI LASER GCL 2-50 Professional





Part number	0 601 066
Projection	2 lines / 2 points
Accuracy	± 0.3 mm/m
Working range	15 m
Self-levelling range	± 4°
Dust and splash protection	IP 54
Comes complete with	F01
Carrying case (1 608 M00 C1R)	x
Ceiling clamp	x
1/2 L-BOXX inlay for tool (1 608 M00 C1S)	x
Laser target plate	x
RM 1 Professional (0 601 092 600)	x
3 x battery 1.5 V LR6 (AA)	x

COMBI LASER GCL 2-50 C Professional





Technical data	
Part number	0 601 066
Projection	2 lines / 2 points
Accuracy	± 0.3 mm/m
Working range	20 m
Self-levelling range	± 4°
Dust and splash protection	IP 54
Comes complete with	G00
1 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-
4 x 1.5 V LR6 battery (AA)	x
AA1 alkaline battery adapter (1 608 M00 C1B)	х
GCL 2-50 C/CG Inlay 1 (1 608 M00 C1T)	x
GCL 2-50 C/CG Inlay 2 (1 608 M00 C1U)	-
Laser target plate	х
L-BOXX 136 (1 600 A01 2G0)	-
Protective Bag	х
Quick charger GAL 1230 CV (1 600 A01 16B)	-
Rotating mount RM 2 Professional (0 601 092 700)	X
Wall mount BM 3 Professional (0 601 015 D00)	-

COMBI LASER GCL 2-50 CG Professional



COMBI LASER, LINE LASERS

COMBI LASER GCL 2-50 G Professional





Technical data			
Part number	0 601 066 .		
Projection	2 lines / 2 p	ooints	
Accuracy	± 0.3 mm/m	n* (*plus use-dep	endent deviation)
Working range	up to 15 m		
Self-levelling range	± 4°		
Dust and splash protection	IP 64		
Comes complete with	M00	M01	M02
4 x 1.5 V LR6 battery (AA)	х	х	х
Building tripod BT 150 Professional (0 601 096 B00)	-	x	-
Carrying case	-	-	х
Ceiling Clip DK 10 Professional	-	-	х
Laser target plate	х	x	х
Pouch	x	x	х
Rotating Mount RM 10 Professional (0 601 092 A00)	x	x	x



Comes complete with	W01	W02
4 x 1.5 V LR6 battery (AA)	х	х
Building tripod BT 150 Professional (0 601 096 B00)	x	-
Carrying case	-	х
Laser target plate	х	х
Pouch	х	х
Universal Mount LB 10	х	-
Universal Mount LB 10 & Ceiling Clip DK 10 Professional (0 601 092 C00)	-	x

LINE LASER GLL 2-15 G Professional

👗 🗦 💽 💒



Technical data	
Part number	0 601 063
Projection	2 lines
Accuracy	± 0.3 mm/m* (*plus use-dependent deviation)
Self-levelling range	± 4°
Dust and splash protection	IP 64
Comes complete with	W00
4 x 1.5 V LR6 battery (AA)	x
4 x 1.5 V LR6 battery (AA) Laser target plate	X X
Laser target plate	x

LINE LASER GLL 3-80 Professional



LINE LASERS

LINE LASER		LINE LASER	
GLL 3-80 G Professio	onal NEW!	GLL 3-80 C Profession	nal NEW!
	7		7
Technical data Part number	0 601 063	Technical data Part number	0 601 063
Projection	3 x 360° line	Projection	3 x 360° line
Accuracy	+/- 0.3 mm/m*/** (*for the four horizontal intersection points ; **plus use-dependent deviation)	Accuracy	+/- 0.2 mm/m*/** (*for the four horizontal intersection points ; **plus use-dependent deviation)
Self-levelling range	± 4°	Self-levelling range	± 4°
Comes complete with	Y00	Dust and splash protection	IP 54 *** (***except for the lithium-ion battery
4 x 1.5 V LR6 battery (AA)	x		and AA1 battery adapter)
Carrying case	Х	Comes complete with	R03
Laser target plate	x	Laser target plate	х
Pouch	x	L-BOXX 136 (1 600 A01 2G0)	X
		Pouch	x
		Universal mount BM 1 Professional (0 601 015 A01)	x

LINE LASER GLL 3-80 C Professional

Technical data		
Part number	0 601 063	
Projection	3 x 360° line	
Accuracy	+/- 0.2 mm/m*/** (*for intersection points ; **p deviation)	
Self-levelling range	± 4°	
Dust and splash protection	IP 54 *** (***except for and AA1 battery adapte	
Comes complete with	R00	R70
1 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	-	х
4 x 1.5 V LR6 battery (AA)	х	-
AA1 alkaline battery adapter (1 608 M00 C1B)	х	-
Laser target plate	х	х
L-BOXX 136 (1 600 A01 2G0)	-	x
Pouch	х	х
Quick charger GAL 1230 CV (1 600 A01 16B)	-	x
Universal mount BM 1 Professional (0 601 015 A01)	-	х

LINE LASER GLL 3-80 CG Profess	sional NEW!
Technical data Part number	0 601 063
Part number Projection	0 601 063 3 x 360° line
Accuracy	+/- 0.2 mm/m*/** (*for the four horizontal intersection points ; **plus use-dependent deviation)
Self-levelling range	± 4°
Dust and splash protection	IP 54 *** (***except for the lithium-ion battery and AA1 battery adapter)
Comes complete with	T03
Laser target plate	x
L-BOXX 136 (1 600 A01 2G0)	x
Pouch	x
Universal mount BM 1 Professional (0 601 015 A01)	x

LINE LASER, TILE LASER

LINE LASER GLL 3-80 CG Profession	al	TILE LASER GTL 3 Professional	
Technical data		Technical data	
Part number	0 601 063	Part number	0 601 015
Projection	3 x 360° line	Projection	3 lines
Accuracy	+/- 0.2 mm/m*/** (*for the four horizontal	Angular accuracy (between 0 – 90° angle)	± 0,2 mm/m
	intersection points ; **plus use-dependent deviation)	Working range with target plate	20 m
	deviation)	Dust and splash protection	IP 54
Self-levelling range	± 4°	Comes complete with	200
Dust and splash protection	IP 54 *** (***except for the lithium-ion battery	4 x 1.5 V LR6 battery (AA)	х
	and AA1 battery adapter)	Alignment disc	x
Comes complete with	T70	Laser target plate	x
1 x battery GBA 12V 2.0Ah (1 600 Z00 02X)	x	Protective Bag	х
Laser target plate	x		
L-BOXX 136 (1 600 A01 2G0)	x		
Pouch	x		
Quick charger GAL 1230 CV (1 600 A01 16B)	x		
Universal mount BM 1 Professional (0 601 015 A01)	x		

13

ROTATION LASERS

ROTATION LASER GRL 300 HV Professional



ROTATION LASER GRL 300 HVG Professional



Technical data	
Part number	0 601 061
Accuracy	± 3.0 mm at 30m
Working range with receiver	300 m (Diameter)
Dust and splash protection	IP 54
Rotation speed	150, 300, 600 rpm
Colour of laser line	red
Comes complete with	501
1 x 1.5 V LR6 battery (AA)	x
1 x 9 V block battery (6LR61)	х
1 x NiMH battery (spare part number 1 608 M00 05G)	x
2 x 1.5 V LR20 battery (D)	x
Battery compartment (spare part number 1 608 M00 05D)	x
Carrying case	x
Charger set with adapter (spare part number 1 600 A00 1W3)	x
Holder also available separately as an accessory (spare part number 1 608 M00 70F)	x
Laser Receiver LR 1 Professional (0 601 015 400)	x
Laser target (red) (spare part number 1 608 M00 05C)	x
Laser viewing glasses (red) (spare part number 1 608 M00 05B)	x
Remote control RC1 Professional (0 601 069 900)	x
Universal mount WM 4 Professional (0 601 092 400)	X

Part number	0 601 061
Accuracy	± 3.0 mm at 30m
Working range with receiver	300 m (Diameter)
Dust and splash protection	IP 54
Rotation speed	150, 300, 600 rpm
Colour of laser line	green
Comes complete with	701
1 x 1.5 V LR6 battery (AA)	x
1 x 9 V block battery (6LR61)	х
1 x NiMH battery (spare part number 1 608 M00 05G)	x
2 x 1.5 V LR20 battery (D)	x
Battery compartment (spare part number 1 608 M00 05D)	x
Carrying case (spare part number 1 608 M00 05F)	x
Charger set with adapter (spare part number 1 608 M00 05E)	x
Holder also available separately as an accessory (spare part number 1 608 M00 05A)	x
Laser receiver LR 1G Professional (0 601 069 700)	x
Laser target (blue) (spare part number 1 608 M00 05K)	x
Laser viewing glasses (green) (spare part number 1 608 M00 05J)	x
Remote control RC1 Professional (0 601 069 900)	x
Universal mount WM 4 Professional	x

ROTATION LASERS, OPTICAL LEVELS

ROTATION LASER GRL 400 H Professional





Technical data	
Part number	0 601 061
Accuracy	± 2.4 mm at 30m
Working range with receiver	400 m (Diameter)
Dust and splash protection	IP 56
Rotation speed	600 rpm
Colour of laser line	red
Comes complete with	800
1 x 9 V block battery (6LR61)	x
1 x NiMH battery (spare part number 1 608 M00 05G)	х
2 x 1.5 V LR20 battery (D)	x
Carrying case (spare part number 1 608 M00 05F)	х
Charger with adapter	x
Laser Receiver LR 1 Professional (0 601 015 400)	х
Non-rechargeable battery compartment (1 609 203 M02)	х

ROTATION LASER GRL 600 CHV Professional	
Technical data	
Part number Accuracy	0 601 061 ± 1.5 mm at 30m horizontal; ± 3.0 mm at 30m vertical
Working range with receiver	up to 600 m (Diameter)
Dust and splash protection	IP 68
Rotation speed	150/300/600 min-1
Colour of laser line	red
Comes complete with	F70
1 x battery ProCORE18V 4.0Ah (1 600 A01 6GB)	x
4 x 1.5 V LR20 battery (D)	х
4 x 1.5 V LR6 battery (AA)	x
Battery adapter BA 1 Professional	x
Carrying case	x
Laser receiver LR 60 Professional (0 601 069 P00)	x
Laser target plate	х
Laser viewing glasses (red) (spare part number 1 608 M00 05B)	x
Quick charger GAL 18V-40 Professional (1 600 A01 9RJ)	x

х

х

х

OPTICAL LEVEL GOL 20 D Professional





Technical data	
Part number	0 601 068
Accuracy	± 3.0 mm at 30m
Unit of measure	360 degrees
Magnification	20 x
Working range	up to 60 m
Comes complete with	400
Adjusting pin	x
Carrying case (1 600 A00 0LF)	х
Hex key	x
Lens cover	х
Plumb bob	х

OPTICAL LEVEL GOL 26 D Professional

Receiver bracket RB 60 Professional

Remote control RC 6 Professional

Wall mount WM 6 Professional



recinical uata		
Part number	0 601 068	
Accuracy	± 1.6 mm at 30 m	
Unit of measure	360 degrees	
Magnification	26 x	
Working range	up to 100 m	
Comes complete with	000	002
Adjusting pin	х	x
Building tripod BT 160 Professional (0 601 091 200)	-	x
Carrying case	-	x
Carrying case (1 600 A00 0LF)	х	-
Hex key	х	х
Lens cover	x	х
Measuring rod GR 500 Professional (0 601 094 300)	-	x
Plumb bob	х	x

OPTICAL LEVEL

OPTICAL LEVEL GOL 32 D Professional



1km-2.5mm

Technical data	
Part number	0 601 068
Accuracy	± 1 mm at 30 m
Unit of measure	360 degrees
Magnification	32 x
Working range	120 m
Comes complete with	502
Adjusting pin	x
Building tripod BT 160 Professional (0 601 091 200)	x
Carrying case (1 600 A00 0LF)	-
Hex key	x
Lens cover	x
Measuring rod GR 500 Professional (0 601 094 300)	x
Plumb bob	x



ACCESSORIES

Tried-and-tested tripods from Bosch are precisely and reliably set to the required work height. Bosch tripods provide absolute stability on any surface. Robust, lightweight aluminium design and easy to transport.



BT 150 Professional

(see page 231)

- ▶ Robust aluminium design
- ▶ For work heights from 55 to 157 cm
- ► Functionality and precision due to circular vial

LASER RECEIVERS

LASER RECEIVER **LR 1 Professional**





Technical data	
Part number	0 601 015
Range of	0 – 200 m
Measuring accuracy (fine/rough)	± 1 mm/± 3 mm
Dust and splash protection	IP 65
Power supply	1 x 9 V 6LR61 Block
Suitable for	GRL 300 HV, GRL 400 H Professional
Comes complete with	400
1 x 9 V block battery (6LR61)	х
Bracket (1 608 M00 70F)	x
Diadact (2 000 m00 /01)	~



LASER RECEIVER

LR 1G Professional



Technical data	
Part number	0 601 069
Range of	0 – 150 m
Measuring accuracy (fine/rough)	± 1 mm/± 3 mm
Dust and splash protection	IP 65
Power supply	1 x 9 V 6LR61 Block
Suitable for	GRL 300 HVG Professional
Comes complete with	700
1 x 9 V block battery (6LR61)	x

LASER RECEIVER **LR 2 Professional**





Technical data	
Part number	0 601 069
Range of	5 – 50 m
Measuring accuracy (fine/rough)	± 1 mm/± 3 mm
Dust and splash protection	IP 54
Power supply	1 x 9 V 6LR61 Block
Suitable for	GLL 2-50, GLL 3-50
Comes complete with	100
1 x 9 V block battery (6LR61)	х

LASER RECEIVER **LR 6 Professional**



Technical data	
Part number	0 601 069
Range of	5 – 50 m
Measuring accuracy (fine/rough)	± 1 mm/± 3 mm
Dust and splash protection	IP 54
Power supply	2 x 1.5 V LR03 (AAA)
Suitable for	GCL 2-50 C, GLL 3-80, GLL 3-80 C
Comes complete with	H00
2 x 1.5 V LR03 battery (AAA)	x

13

LASER RECEIVER

LASER RECEIVER LR 7 Professional




→ 5-50 m 80 mm 19 54	
Technical data	
Part number	0 601 069
Range of	5 – 50 m
Measuring accuracy (fine/rough)	± 1 mm/± 3 mm
Dust and splash protection	IP 54
Power supply	2 x 1.5 V LR6 (AA)
Suitable for	GCL 2-50 C, GCL 2-50 CG, GLL 3-80, GLL 3-80 C, GLL 3-80 CG
Comes complete with	J00
2 x 1.5 V LR6 battery (AA)	х
Bracket for laser receiver LR 6/7 (1 608 M00 C1L)	x
Protective Bag	x

REMOTE CONTROL, BUILDING TRIPODS

REMOTE CONTROL RC 2 Professional



Technical data	
Part number	0 601 069
Range of	20 m
Dust and splash protection	IP 5X
Power supply	3 x 1.5 V LR03 (AAA)
Suitable for	GSL 2 Professional
Comes complete with	C00
3 x 1.5 V LR03 battery (AAA)	х

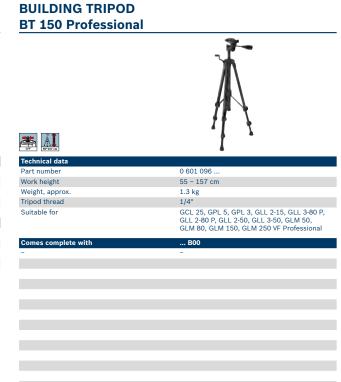

BUILDING TRIPOD BT 250 Professional



1/6" R.4-222 cm

1/e 1/e 1/e kg	•
Technical data	
Part number	0 601 096
Work height	97,5 – 250 cm
Weight, approx.	3.4 kg
Tripod thread	1/4"
Suitable for	GLL 2-15; GLL 3-80 P; GLL 3-50; GLL 2-80 P; GLL 2-50; GLM 50; GLM 80; GLM 150; GLM 250 VF; GIM 60 L Professional
Comes complete with	A00
-	-

BUILDING TRIPOD BT 160 Professional



Technical data	
Part number	0 601 091
Work height	97 – 160 cm
Weight, approx.	4.1 kg
Tripod thread	5/8"
Suitable for	GPL 5, GPL 3, GLL 2-15, GLL 3-80 P, GLL 2-80 P, GLL 3-50, GCL 25, GRL 400 H, GRL 300 HVG, GRL 300 HV, GRL 500 H/HV, GOL 20 G/D, GOL 26 G/D, GOL 32 G/D Professional
Comes complete with	200
-	-

BUILDING TRIPODS, TRIPOD ADAPTER, MEASURING ROD



TRIPOD ADAPTER Tripod adapter 5/8" - 1/4" Professional



MEASURING ROD GR 240 Professional

	1
	1
	Ī
Technical data	
Part number	0 601 094
Length	2.4 m
Sections	2
Units of measurement	m/cm
Suitable for	GLL 2-15, GLL 3-80 P, GLL 2-80 P, GLL 2-50, GRL 400 H, GRL 3-50, GRL 300 HV, GRL 300 HVG, GRL 500 H/HV, GOL 20 G/D, GOL 26 G/D Professional
Comes complete with	100
-	-

Technical data

MEASURING ROD, TELESCOPIC POLE, BRACKETS AND MOUNTS

MEASURING ROD GR 500 Professional		TELESCOPIC POLE BT 350 Professional	
Technical data		Technical data	
Part number	0 601 094	Part number	0 601 015
Length	5.0 m	Weight, approx.	2.5 kg
Sections	5	Work height	140 - 350 cm
Units of measurement Suitable for	m/cm GRL 400 H, GRL 300 HV, GRL 300 HVG,	Suitable for	GPL 3, GPL 5, GCL 25, GLL 2-15, GLL 2-50, GLL 2-80 P, GLL 3-50, GLL 3-80 P Professional
	GRL 500 H/HV, GOL 20 G/D, GOL 26 G/D, GOL 32G/D Professional	Comes complete with Holder (spare part number 1 619 P04 421)	B00 x
Comes complete with	300	Metal bracket (spare part number	x
Circular vial	300 X	1 619 P04 420)	*
Protective Bag	x		
Theetive Dag	*		

BRACKET AND MOUNT RM 2 Professional



Technical data		
Part number	0 601 092	
Tool dimensions (height)	113 mm	
Tool dimensions (length)	150 mm	
Comes complete with	700	
-	-	

BRACKET AND MOUNT RM 3 Professional

月期

Technical data



Part number	0 601 092
Thread connection	1/4"
Clamp	Quick-release clamp
Tool dimensions (height)	120 mm
Tool dimensions (length)	135 mm
Weight, approx.	0.500 kg
Comes complete with	800
3 x 1.5 V LR03 battery (AAA)	х
Bracket	х
Ceiling clamp	x
L-BOXX inlay	х
Remote control RC2 Professional (0 601 069 C00)	x

BRACKETS AND MOUNTS

BRACKET AND MOUNT RM 10 Professional

 Image: State State

Comes complete with

RM 10 in Carton



0 601 092

... A00

х

BRACKET AND MOUNT WM 4 Professional



Technical data	
Part number	0 601 092
Suitable for	GRL 300 HV/HVG, GRL 400 H, GRL 500 H/HV Professional
Tool dimensions (height)	340 mm
Weight, approx.	0.700 kg
Comes complete with	400
-	-

BRACKET AND MOUNT Bracket for LR 6, LR 7 Professional



BRACKET AND MOUNT Bracket for LR 1, LR 1G, LR 2 Professional



1 608 M00 ... LR 1, LR 1G, LR 2 Professional

... 70F

Technical data	
Part number	1 608 M00
Suitable for	LR 6, LR 7
Clamp	Thumb-release clamp
Tool dimensions (height)	70 mm
Tool dimensions (length)	170 mm
Weight, approx.	0.150 kg
Comes complete with	C1L
-	-



Technical data

Part number Suitable for Comes complete wit

UNIVERSAL MOUNTS, LASER TARGETS, MEASURING RAIL, ACCESSORY

UNIVERSAL MOUNT BM 1 Professional



Technical data	
Part number	0 601 015
Suitable for	GLL 3-80 P, GLL 2-80 P, GLL 3-50, GLL 2-50, GLL 2-15, GCL 25, GPL5, GPL 3 Professional
Weight, approx.	0.500 kg
Comes complete with	A01
-	-

UNIVERSAL MOUNT BM 3 Professional



Technical data	
Part number	0 601 015
Height	173 mm
Length	155 mm
Weight approx.	0.3 kg
Comes complete with	D00

LASER TARGET

Laser target (red) Professional



LASER TARGET

Laser target (blue) Professional



Technical data	
Part number	1 608 M00
Suitable for	GRL 300 HV, GRL 400 H Professional
Paint	red
Tool dimensions (height)	100 mm
Comes complete with	05C
-	-

Technical data	
Part number	1 608 M00
Suitable for	GRL 300 HVG Professional
Paint	blue
Tool dimensions (height)	100 mm
Comes complete with	05K
-	-

MEASURING RAIL R 60 Professional



Part number	0 601 079
Suitable for	GLM 80, GLM 100 C Professional
Tool dimensions (length)	610 mm
Weight, approx.	0.59 kg
Comes complete with	000
Protective Bag	х

ACCESSORY Battery adapter AA1 Professional



ACCESSORY

ACCESSORY Laser viewing glasses (red) Professional



Part number	1 608 M00
Suitable for	GRL 300 HV, GRL 400 H, GRL 500 H/HV Professional, all laser measures
Paint	red
Comes complete with	05B
-	-
-	-

TOOL INDEX

		_	<u></u>		00		AF
25	1 1.:. ODA 101/2 OAF + 1.:: ODA 101/	47	GA	111	GB	107	GE
25	1 x GBA 12V 2.0Ah + 1 x GBA 12V 4.0Ah + GAL 12V-40 Professional	47	GAL 1880 CV Professional GAL 18V-160 C & GCY 42	111	GBH 4-32 DFR Professional GBH 5-40 D Professional		GEX 125-1 AE Professional
46	1 x ProCORE18V 4.0Ah +	47	Professional				GEX 125-150 AVE Professional GEX 150 AC Professional
40	1 x ProCORE18V 4.0All + 1 x ProCORE18V 8.0Ah +	47			GBH 5-40 DCE Professional GBH 8-45 D Professional		GEX 150 AC Professional
	GAL 1880 CV Professional						
46	1 x ProCORE18V 4.0Ah +	_	GAL 18V6-80 Professional GAM 220 MF Professional	71	GBH 8-45 DV Professional GBL 18V-120 Professional		GEX 34-150 Professional GEX 40-150 Professional
40	GAL 18V-40 Professional					120	GEX 40-150 Professional
	GAL 10V-40 FIDIESSIDIIai	_	GAM 220 Professional		GBL 18V-120 Professional		GF
	2		GAM 270 MFL Professional	99	GBM 13-2 RE Professional	0.2	
0.4			GAS 12V Professional	123	GBR 15 CAG Professional		GFA 18-M Professional
24	2 x GBA 12V 2.0Ah + GAL 12V-40 Professional		GAS 12V Professional				GFA 18-W Professional
0.4				0.4	GC	83	GFA FC2 Professional
24	2 x GBA 12V 3.0Ah + GAL 12V-40		GAS 18V-1 Professional		GCB 18V-63 Professional	_	
	Professional	71	GAS 18V-10 L Professional		GCB 18V-63 Professional		GG
25	2 x GBA 12V 6.0Ah + GAL 12V-40	71	GAS 18V-10 L Professional	_	GCD 12 JL Professional		GGS 18 V-LI Professional
	Professional		GAS 18V-10 L Professional		GCG 18V-600 Professional		GGS 18 V-LI Professional
45	2 x GBA 18V 4.0Ah + GAL 18V-40		GAS 18V-10 L Professional		GCL 2-15 G Professional		GGS 18V-10 SLC Professional
	Professional				GCL 2-15 Professional		GGS 18V-10 SLC Professional
45	2 x GBA 18V 5.0Ah + GAL 1880	197	GAS 25 L SFC Professional	221	GCL 2-50 C Professional	70	GGS 18V-23 LC Professional
	Professional	-	GAS 35 L SFC+ Professional	221	GCL 2-50 C Professional	188	GGS 18V-23 LC Professional
47	2 x ProCORE18V 12.0Ah + GAL	197	GAS 35 M AFC Professional	221	GCL 2-50 CG Professional	70	GGS 18V-23 PLC Professional
	18V-160 C + GCY 42 Professional	198	GAS 55 M AFC Professional	222	GCL 2-50 G Professional	189	GGS 18V-23 PLC Professional
46	2 x ProCORE18V 4.0Ah + GAL	25	GAX 18V-30 Professional	221	GCL 2-50 Professional	189	GGS 28 C Professional
	18V-40 Professional	48	GAX 18V-30 Professional	165	GCM 12 GDL Professional	189	GGS 28 LC Professional
46	2 x ProCORE18V 5.5Ah + GAL			165	GCM 12 GDL Professional	189	GGS 8 CE Professional
	1880CV Professional		GB	164	GCM 12 SDE Professional	190	GGS 8 H Professional
46	2 x ProCORE18V 8.0Ah + GAL	24	GBA 12V 2.0Ah Professional		GCM 12 SDE Professional		
	18V-160 C + GCY 42 Professional	24	GBA 12V 2.5.0Ah W Wireless	64	GCM 18V-216 Professional		GH
			Charging Professional		GCM 18V-216 Professional	83	GHA FC2 Professional
	8	24	GBA 12V 3.0Ah Professional	-	GCM 18V-305 GDC Professional		GHG 23-66 110V Professional
218	8.5 mm camera head (120 cm)	_			GCM 350-254 Professional		GHG 23-66 Professional
	Professional	44	GBA 18V 2.0Ah CoolPack Professional	164			GHJ 12+18V Unisex (Basic Version)
218	8.5 mm camera head (300 cm)		GBA 18V 3.0Ah Professional		GCM 8 SDE Professional	200	Professional
210	Professional		GBA 18V 3.0Ah Coolpack Professional			205	GHJ 12+18V Unisex (Basic Version)
218	8.5 mm camera head (300cm)	44	GBA 18V 4.0Ah CoolPack Professional		GCM 8 SJL Professional	205	Professional
210	Professional			_	GCM 800 SJ Professional	20	GHO 12V-20 Professional
	1101833101101						
	D		GBA 18V 6.0Ah Professional	102	GCM 800 SJ Professional		GHO 12V-20 Professional
0.05	B		GBH 12-52 D Professional		<u></u>		GHO 16-82 Professional
235	Battery adapter AA1 Professional		GBH 12-52 DV Professional	100	GD		GHO 26-82 D Professional
	BM 1 Professional		GBH 18 V-20 Professional		GDE 115/125 FC-T Professional	140	GHO 40-82 C Professional
235	BM 3 Professional		GBH 18 V-20 Professional		GDE 125 EA-S Professional	_	<u></u>
27	Bosch GO Professional		GBH 18 V-EC Professional	_	GDE 125 EA-T Professional		GI
234	Bracket for LR 1, LR 1G, LR 2 Professional			-	GDE 16 Cyl Professional		GIC 120 C Professional
234	Bracket for LR 6, LR 7 Professional	57	GBH 18 V-EC Professional	111			GIC 120 C Professional
231	BT 150 Professional	106	GBH 18 V-EC Professional		GDE 162 Professional		GIC 120 Professional
231	BT 160 Professional		GBH 18 V-EC Professional	71	GDE 18V-16 Professional		GIM 120 Professional
232	BT 170 HD Professional	106	GBH 18 V-EC Professional	72	GDE 18V-26 D Professional		GIM 60 L Professional
231	BT 250 Professional	55	GBH 18 V-LI Compact Professional	176	GDE 230 FC-S Professional	214	GIM 60 Professional
232	BT 300 HD Professional	55	GBH 18 V-LI Compact Professional	176	GDE 230 FC-T Professional	216	GIS 1000 C Professional
233	BT 350 Professional	56	GBH 18 V-LI Compact Professional	113	GDE 68 Professional		
		105	GBH 18 V-LI Compact Professional	118	GDE hex Professional		GK
	D	105	GBH 18 V-LI Compact Professional	116	GDE max Professional	29	GKF 12V-8 Professional
216	D-tect 120 wallscanner Professional	105	GBH 18 V-LI Compact Professional	27	GDR 12V-105 Professional	133	GKF 12V-8 Professional
217	D-tect 120 wallscanner Professional	56	GBH 18V-21 Professional	84	GDR 12V-105 Professional	133	GKF 1600 Professional
217	D-tect 150 SV wallscanner Professional	106	GBH 18V-21 Professional	28	GDR 12V-110 Professional	133	GKF 600 Professional
217	D-tect 150 wallscanner Professional	58	GBH 18V-26 D Professional	84	GDR 12V-110 Professional	31	GKS 12V-26 Professional
		107	GBH 18V-26 D Professional	51	GDR 18V-160 Professional	152	GKS 12V-26 Professional
	F	58	GBH 18V-26 F Professional	85	GDR 18V-160 Professional	154	GKS 165 Professional
157	FSN 1100 Professional	107	GBH 18V-26 F Professional	51	GDR 18V-200 C Professional		GKS 18V-57 G Professional
157	FSN 1600 Professional	57	GBH 18V-26 Professional		GDR 18V-200 C Professional	152	GKS 18V-57 G Professional
157	FSN 2100 Professional	107	GBH 18V-26 Professional		GDS 12V-115 Professional		GKS 18V-57 Professional
157	FSN 3100 Professional	58	GBH 18V-45 C Professional		GDS 12V-115 Professional		GKS 18V-57 Professional
157	FSN 800 Professional	59	GBH 18V-45 C Professional		GDS 18 E Professional		GKS 18V-68 C Professional
158	FSN KZW Professional		GBH 18V-45 C Professional		GDS 18V-200 C Professional		GKS 18V-68 C Professional
158	FSN OFA 32 KIT 800 Professional		GBH 18V-45 C Professional		GDS 18V-200 C Professional		GKS 18V-68 C Professional
158	FSN RA 32 1600 Professional	100	GBH 2-20 D Professional	51	GDS 18V-300 Professional	63	GKS 18V-68 GC Professional
158	FSN RA 32 800 Professional	110	GBH 2-26 F Professional		GDS 18V-300 Professional	63	
158	FSN SA Professional	110	GBH 2-26 Professional		GDS 30 Professional		GKS 18V-68 GC Professional
1.17	TON ON TRIESSIONAL	110			5		
100		110	GBH 2-28 F Professional		GDX 18V-180 Professional		GKS 18V-68 GC Professional
100	CA.		GBH 2-28 Professional	86 52	GDX 18V-180 Professional GDX 18V-200 C Professional		GKS 18V-68 GC Professional
	GA	_	ODU 2 20 DED Drof!!		UNA LOV-ZUUL, Protessional		GKS 18V-68 GC Professional
25	GAA 12V-21 Professional	111	GBH 3-28 DFR Professional				
25 48	GAA 12V-21 Professional GAA 18V-24 Professional	_	GBH 36 V-EC Compact (2.0 Ah)		GDX 18V-200 C Professional	154	GKS 190 Professional
25 48 25	GAA 12V-21 Professional GAA 18V-24 Professional GAL 12V-40 Professional	111 108	GBH 36 V-EC Compact (2.0 Ah) Professional		GDX 18V-200 C Professional	154 154	GKS 190 Professional GKS 190 Professional
25 48	GAA 12V-21 Professional GAA 18V-24 Professional GAL 12V-40 Professional GAL 1830 W Wireless Charging	111 108 109	GBH 36 V-EC Compact (2.0 Ah) Professional GBH 36 VF-LI Plus Professional	86	GDX 18V-200 C Professional GE	154 154 155	GKS 190 Professional GKS 190 Professional GKS 55+ GCE Professional
25 48 25 48	GAA 12V-21 Professional GAA 18V-24 Professional GAL 12V-40 Professional GAL 1830 W Wireless Charging Professional	111 108 109 108	GBH 36 V-EC Compact (2.0 Ah) Professional GBH 36 VF-LI Plus Professional GBH 36 V-LI Plus Professional	86	GDX 18V-200 C Professional GE GEA FC2 Professional	154 154 155 153	GKS 190 Professional GKS 190 Professional GKS 55+ GCE Professional GKS 65 Professional
25 48 25 48	GAA 12V-21 Professional GAA 18V-24 Professional GAL 12V-40 Professional GAL 1830 W Wireless Charging	111 108 109 108 109	GBH 36 V-EC Compact (2.0 Ah) Professional GBH 36 VF-LI Plus Professional	86	GDX 18V-200 C Professional GE	154 154 155 153 153	GKS 190 Professional GKS 190 Professional GKS 55+ GCE Professional

TOOL INDEX

GK	GR	GS	GW
64 GKT 18V-52 GC Professional	232 GR 240 Professional	49 GSR 18V-28 Professional	65 GWS 18V-10 C Professional
155 GKT 18V-52 GC Professional	233 GR 500 Professional	49 GSR 18V-28 Professional	66 GWS 18V-10 C Professional
155 GKT 55 GCE Professional	225 GRL 300 HV Professional	79 GSR 18V-28 Professional	178 GWS 18V-10 C Professional
	225 GRL 300 HVG Professional	80 GSR 18V-28 Professional	179 GWS 18V-10 C Professional
GL	226 GRL 400 H Professional	49 GSR 18V-55 Professional 49 GSR 18V-55 Professional	66 GWS 18V-10 PC Professional
32 GLI 12V-300 Professional 202 GLI 12V-300 Professional	226 GRL 600 CHV Professional 30 GRO 12V-35 Professional		180 GWS 18V-10 PC Professional 67 GWS 18V-10 PSC Professional
33 GLI 12V-330 Professional	30 GRO 12V-35 Professional 136 GRO 12V-35 Professional	80 GSR 18V-55 Professional 80 GSR 18V-55 Professional	67 GWS 18V-10 PSC Professional 180 GWS 18V-10 PSC Professional
202 GLI 12V-330 Professional	100 GRW 12 E Professional	50 GSR 18V-50 Professional	66 GWS 18V-10 SC Professional
32 GLI 12V-80 Professional		50 GSR 18V-60 C Professional	66 GWS 18V-10 SC Professional
202 GLI 12V-80 Professional	GS	80 GSR 18V-60 C Professional	67 GWS 18V-10 SC Professional
74 GLI 18V-10000 C Professional	150 GSA 1100 E Professional	81 GSR 18V-60 C Professional	179 GWS 18V-10 SC Professional
204 GLI 18V-10000 C Professional	149 GSA 12V-14 Professional	50 GSR 18V-60 FC Professional	179 GWS 18V-10 SC Professional
73 GLI 18V-1200 C Professional	150 GSA 1300 PCE Professional	81 GSR 18V-60 FC Professional	179 GWS 18V-10 SC Professional
203 GLI 18V-1200 C Professional	61 GSA 18 V-LI C Professional	52 GSR 18V-EC TE Professional	65 GWS 18V-10 Professional
73 GLI 18V-1900 Professional	149 GSA 18 V-LI C Professional	89 GSR 18V-EC TE Professional	65 GWS 18V-10 Professional
203 GLI 18V-1900 Professional	61 GSA 18 V-LI Professional	81 GSR 36 VE-2-LI Professional	178 GWS 18V-10 Professional
73 GLI 18V-2200 C Professional	61 GSA 18 V-LI Professional	129 GSS 140-1 A Professional	67 GWS 18V-15 C Professional
203 GLI 18V-2200 C Professional	149 GSA 18 V-LI Professional	130 GSS 160 Multi Professional	180 GWS 18V-15 C Professional
72 GLI 18V-300 Professional	149 GSA 18 V-LI Professional	129 GSS 160-1 A Professional	67 GWS 18V-15 SC Professional
202 GLI 18V-300 Professional	62 GSA 18V-32 Professional	59 GSS 18V-10 Professional	180 GWS 18V-15 SC Professional
73 GLI 18V-4000 C Professional	150 GSA 18V-32 Professional	129 GSS 18V-10 Professional	65 GWS 18V-7 Professional
203 GLI 18V-4000 C Professional	29 GSB 12V-15 Professional	130 GSS 23 AE Professional	178 GWS 18V-7 Professional
72 GLI VariLED Professional	91 GSB 12V-15 Professional	130 GSS 280 AVE Professional	175 GWS 22-180 H Professional
204 GLI VariLED Professional	29 GSB 12V-35 Professional	31 GST 12V-70 Professional	175 GWS 22-230 H Professional
222 GLL 2-15 G Professional 222 GLL 2-15 G Professional	96 GSB 13 RE Professional 96 GSB 16 RE Professional	145GST 12V-70 Professional146GST 150 BCE Professional	175 GWS 22-230 LVI Professional 175 GWS 24-230 LVI Professional
222 GLL 2-15 G Professional	97 GSB 1600 RE Professional	146 GST 150 BCE Professional	175 GWS 24-230 LVI Professional
223 GLL 3-80 C Professional	97 GSB 162-2 RE Professional	146 GST 160 BCE Professional	183 GWS 7-115 Professional
223 GLL 3-80 CG Professional	55 GSB 18 VE-2-LI Professional	146 GST 160 DEE Professional	183 GWS 880 Professional
224 GLL 3-80 CG Professional	93 GSB 18 VE-2-LI Professional	60 GST 18 V-LI B Professional	184 GWS 9-115 P Professional
223 GLL 3-80 G Professional	55 GSB 18V-110 C Professional	145 GST 18 V-LI B Professional	183 GWS 9-115 S Professional
222 GLL 3-80 Professional	93 GSB 18V-110 C Professional	60 GST 18 V-LI S Professional	183 GWS 9-115 S Professional
212 GLM 120 C Professional	53 GSB 18V-21 Professional	145 GST 18 V-LI S Professional	68 GWX 18V-10 C Professional
212 GLM 250 VF Professional	53 GSB 18V-21 Professional	145 GST 90 BE Professional	181 GWX 18V-10 C Professional
211 GLM 30 Professional	91 GSB 18V-21 Professional		68 GWX 18V-10 PC Professional
211 GLM 40 Professional	91 GSB 18V-21 Professional	GT	182 GWX 18V-10 PC Professional
211 GLM 50 C Professional	53 GSB 18V-28 Professional	167 GTA 2500 W Professional	69 GWX 18V-10 PSC Professional
212 GLM 80 + R 60 Professional	53 GSB 18V-28 Professional	168 GTA 2500 W Professional	182 GWX 18V-10 PSC Professional
211 GLM 80 Professional	53 GSB 18V-28 Professional	167 GTA 2600 Professional	69 GWX 18V-10 SC Professional
	91 GSB 18V-28 Professional	167 GTA 3800 Professional	181 GWX 18V-10 SC Professional
GM	92 GSB 18V-28 Professional	168 GTA 3800 Professional	68 GWX 18V-10 Professional
133 GMF 1600 CE Professional	92 GSB 18V-28 Professional	168 GTA 560 Professional	181 GWX 18V-10 Professional
204 GML 20 Professional	54 GSB 18V-55 Professional	167 GTA 60 W Professional	69 GWX 18V-15 SC Professional
205 GML 50 Professional	92 GSB 18V-55 Professional	166 GTA 600 Professional	182 GWX 18V-15 SC Professional
204 GML SoundBoxx Professional	54 GSB 18V-60 C Professional	166 GTA 6000 Professional	68 GWX 18V-8 Professional
216 GMS 100 M Professional	54 GSB 18V-60 C Professional	28 GTB 12V-11 Professional	181 GWX 18V-8 Professional
216 GMS 120 Professional	92 GSB 18V-60 C Professional 93 GSB 18V-60 C Professional	89 GTB 12V-11 Professional	185 GWX 750-115 Professional
GN		215 GTC 400 C Professional 215 GTC 400 C Professional	185 GWX 9-115 S Professional
192 GNA 18V-16 Professional	97 GSB 21-2 RE Professional 93 GSB 36 VE-2-LI Professional	213 GTC 400 C Professional 224 GTL 3 Professional	К
	192 GSC 12V-13 Professional	164 GTM 12 JL Professional	158 KS 3000 + FSN SA Professional
GO	70 GSC 12V-13 Professional	165 GTS 10 J Professional	
132 GOF 1250 CE Professional	192 GSC 18V-16 Professional	165 GTS 10 XC Professional	L
132 GOF 1250 LCE Professional	147 GSG 300 Professional	166 GTS 635-216 Professional	235 Laser target (blue) Professional
132 GOF 1600 CE Professional	115 GSH 11 E Professional	166 GTS 635-216 Professional	235 Laser target (red) Professional
226 GOL 20 D Professional	116 GSH 11 VC Professional		236 Laser viewing glasses (red)
226 GOL 26 D Professional	118 GSH 16-28 Professional	GU	Professional
227 GOL 32 D Professional	118 GSH 27 VC Professional	31 GUS 12V-300 Professional	229 LR 1 Professional
30 GOP 12V-28 Professional	115 GSH 5 CE Professional	32 GUS 12V-300 Professional	229 LR 1G Professional
136 GOP 12V-28 Professional	115 GSH 5 Professional	191 GUS 12V-300 Professional	229 LR 2 Professional
59 GOP 18V-28 Professional	115 GSH 7 VC Professional	191 GUS 12V-300 Professional	229 LR 6 Professional
60 GOP 18V-28 Professional	26 GSR 12V-15 FC Professional		230 LR 7 Professional
136 GOP 18V-28 Professional	78 GSR 12V-15 FC Professional	GW	
137 GOP 18V-28 Professional	26 GSR 12V-15 Professional	83 GWA FC2 Professional	M
137 GOP 30-28 Professional	78 GSR 12V-15 Professional	212 GWM 32 Professional	28 MA55 Professional
138 GOP 40-30 Professional	27 GSR 12V-20 HX Professional	213 GWM 40 Professional	52 MA55 Professional
138 GOP 55-36 Professional	82 GSR 12V-20 HX Professional	184 GWS 11-125 P Professional	89 MA55 Professional
0.0	27 GSR 12V-35 FC Professional	184 GWS 11-125 Professional	89 MA55 Professional
GP	79 GSR 12V-35 FC Professional	184 GWS 12-125 CI Professional	<u> </u>
205 GPB 12V-10 Professional	26 GSR 12V-35 Professional	31 GWS 12V-76 Professional	0
220 GPL 3 Professional	26 GSR 12V-35 Professional	177 GWS 12V-76 Professional	132 OFZ Professional
220 GPL 5 Professional	79 GSR 12V-35 Professional	185 GWS 13-125 CI Professional	P
100 CDO 14 CE Drofoosianal	70 CCD 101/ 25 D1		
190 GPO 14 CE Professional	79 GSR 12V-35 Professional 50 GSR 18V-110 C Professional	178GWS 18 V-LI Professional64GWS 18-125 V-LI Professional	157 Parallel guide for Bosch Professiona

TOOL INDEX

	Р
45	ProCORE18V 12.0Ah Professional
45	ProCORE18V 4.0Ah Professional
45	ProCORE18V 5.5.0Ah Professional
45 45	ProCORE18V 5.5.0Ah Professional ProCORE18V 8.0Ah Professional
45	FIOCORE 10V 8.0AIT FIOIESSIONAI
_	D
0.05	R
235	R 60 Professional
158	RA 32 Professional
231	RC 2 Professional
234	RM 10 Professional
233	RM 2 Professional
233	RM 3 Professional
	Т
134	TE 600 Professional
232	Tripod adapter 5/8" - 1/4"
202	Professional
	W
40	
48	Wireless Charging 230V L-BOXX Bay
	Professional
48	Wireless Charging Ready-to-Go
	L-BOXX Bay Professional
234	WM 4 Professional
_	





		_									-	_					_						_						
				 											_			 				_		 					
				 							_	_			_									 					
				 								_			_			 						 					
													-		-			 										-+	
-								_	_		_		-		_		_	 	_	_	_	_					_		
															_													-+	
											_		_		_			 										-+	
_			_						_						_			 										-+	
_															_			 											
													\uparrow		1														
														\neg														-	
													\neg		+														
-														+															
			\neg						\neg				-	+															
																-													
																												\rightarrow	









					T																				
		1	\neg	\top	\uparrow	1	\neg	\neg								\neg			\neg	\neg					-
	\uparrow		\uparrow	\top	\uparrow	\uparrow														\neg					
\square			\top	\top	\uparrow								\square						\neg	\neg					
			\top	\top	\uparrow								\square						\neg	$\neg \uparrow$					
			+	\uparrow	\uparrow	\uparrow													\uparrow	\neg					
	\uparrow		\uparrow	\top	\uparrow	\uparrow												1	\square	\neg					
	\top	\top	\uparrow	$\neg \uparrow$	\top	\uparrow													\square	$\neg \uparrow$					
	\uparrow	\uparrow	\neg	$\neg \uparrow$	\uparrow	\uparrow							\square						\neg	\neg					
		\neg	\neg	\neg	\uparrow	\uparrow													1	\neg					
		1	\uparrow	\neg	\uparrow	\uparrow													1	\neg					
	\uparrow	1	\uparrow	\top	\uparrow	1													1	\neg					
		_		_																					
			\neg	\square	\top	\uparrow													1	\neg					
			\top		\top	\neg																			
			\top		\top	\uparrow												1							
																		1							
					_																				
				_	_																				
					_	_																			
					_																				
															_				_						
																		1							
																		1							
																		1							
																		1							_1
					\Box																				_1
																		1							_1
																									_1
					\Box																				
					\Box																				
					\Box																				
															_										
					\Box													1							
					\Box]										







			 							 	-													 					
	_							_			-	_											_					_	
			 							 	-				_					-	 			 					
			 					_		 		-			_					-	 			 				_	
			 												_					_	 			 					
									_				-		-	-+				-									
									_		_	_	-		_	-+	-		_	+	_	_					_		
											_		_		_		_		_	_									
													_		_				_	_									
																\uparrow													
														\neg		+													
														+		+		-		1									
										 			+		+	+			+	+									
														\rightarrow		\dashv		\rightarrow											
-													+		+	\dashv				+									
									_					-+		+													
											+	-	-		-		-			+									
									_	 	-		+	-+	+	-+	-		\rightarrow	+									
															_	_													
<u> </u>											_																		
				Image: state s	Image: state of the state of		III<																						









			\top	\uparrow	\neg																		
			\top	\top																			
			\top	\top														\neg					
																		\square					
	\neg	\neg	\top	\uparrow	1												\square	\neg					
	\neg	\top	\top	\uparrow	\neg												\neg	\neg					
		_	_	_																			
		_	_	_																			
			T	_																			
			T	_																			
																	_						
																							_
					\square	\square			\square									\square					
			_		\square																		
			\square		\square	\square			\square					\square	\square								
			_		\square	\square			\square									\square					
			_	_	\square																		
			_	_	\square																		
			_		\square													$ \rightarrow$					
			_		\square	 									 								
			_		\square	 									 				 				
			_	_	\square														 				



Robert Bosch Ltd Power Tools Division PO Box 98 Uxbridge Middlesex UB9 5HN Tel. 0344 736 0109* www.bosch-professional.co.uk

