



Digital Tape Measure GLM 20 Professional

Distance measurement - easy, compact, for professionals



Advantages

- Compact one button laser measure, measuring up to 20m.
- One button for everything intuitive and easy measuring-
- Measure and Capture Holds one measurement while taking another-
- Real Time Measurement Mode Measurement automatically adjusts closer to or farther from target, just like a tape measure.



Technical data	0.13 kg
Order number: 0 601 072	
Units of measurement: m/cm. ft/inch	
Measurement range: 0.15 - 20.00	
Length: 100 mm	
Width: 36 mm	
Height: 23 mm	
Measurement time, typical: < 0.5 s	
Measurement time, max.: 4 s	
Laser diode: 635 nm. < 1 mW	
Laser class: 2	
Measurement accuracy, typical: +/- 3.0 mm	
Power supply: 2 x 1.5 V LR03 (AAA)	
Automatic deactivation: 5 min.	
Scope of supply	EGO

2 x 1.5 V LR03 (AAA) batteries Manufacturer's certificate

Target Groups / Applications:



Professional non users of laser technology who still use and trust traditional methods.



Larger companies that don't want to invest in expensive high spec rangefinders.

03

1

1

Professionals who need to conduct basic measurements and need a compact laser measure.



Laser Measure GLM 40 Professional

All relevant functions in a compact design

13,300^{KES}



Advantages

- Laser measure that measures up to 40m with basic functions such as add and subtract, area and volume
- Maximum readability due to illuminated, three line display
- Memory function enables easy access to the last ten measurements



Technical data

Functions: Length, Area, Volume, Add/Subtract values,

Continuous measurements, Indirect Height, Memory

Order number: 0 601 072 ...

Units of measurement: m/cm. ft/inch

Measurement range: 0.15 - 40.00 m

Length: 105 mm

Width: 41 mm

Height: 24 mm

Measurement time, typical: < 0.5 s

Measurement time, max.: 4 s

Laser diode: 635 nm. < 1 mW

Laser class: 2

Measurement accuracy, typical: ± 1.5 mm

Power supply: 2 x 1.5 V LR03 (AAA)

Automatic deactivation: 5 min.

Scope of supply	9
2 x 1.5 V LR03 (AAA) batteries	1
Manufacturer's certificate	1

Target Groups / Applications:



0.09 kg

00

Tradesmen who mainly work indoors and conduct basic area and length measurements.



Electricians, plumbers, painters who need to estimate material for HVAC systems, electrical installations, wiring, calculating paint and plaster for job.



Cross - Line Laser GLL 2 Professional

Compact and versatile for all short - distance levelling applications



Advantages

- Self-Leveling Cross-Line Laser is a compact leveling and alignment solution.
- Smart Pendulum System, which self levels and indicates out of level position.
- Switch slider to lock for secure transport.
- Easy to use one button operation allows the user to choose among cross-line, horizontal or vertical modes.
- Includes a flexible mounting device that can clamp to practically any interior surface for maximum versatility.





Target Groups / Applications:



(01)

(02)



Line Laser GLL 3-15 X Professional

For easy decorative interior fitting applications





Advantages

- Projection: 3 lines + 1 plumb point
- Maximum precision thanks to the Bosch Pendulum Precision System
- Projection of a vertical and a horizontal line
- Detachable, 360° rotating platform with bubble vial and fine adjustment



Order number: 0 601 063 Self-levelling range*: ± 3* Leveling time: 4 s Laser diode: 635 · 650 nm Laser class: 2 Operating time (max.): 24 h Power supply: 4 x 1.5 V LR6 (AA) Projection: 3 lines + 1 plumb point Scope of supply M000 4 x 1.5 V LR6 (AA) batteries イ Manufacturer's certificate イ Protective bag イ	Technical data	0.72 kg
Leveling time: 4 s Laser diode: 635 · 650 nm Laser class: 2 Operating time (max.): 24 h Power supply: 4 x 1.5 V LR6 (AA) Projection: 3 lines + 1 plumb point Scope of supply M00 4 x 1.5 V LR6 (AA) batteries ✓ Manufacturer's certificate ✓	Order number: 0 601 063	
Laser diode: 635 - 650 nm Laser class: 2 Operating time (max.): 24 h Power supply: 4 x 1.5 V LR6 (AA) Projection: 3 lines + 1 plumb point Scope of supply M00 4 x 1.5 V LR6 (AA) batteries ✓ Manufacturer's certificate ✓	Self-levelling range*: ±3°	
Laser class: 2 Operating time (max.): 24 h Power supply: 4 x 1.5 V LR6 (AA) Projection: 3 lines + 1 plumb point Scope of supply M000 4 x 1.5 V LR6 (AA) batteries ✓ Manufacturer's certificate ✓	Leveling time: 4 s	
Operating time (max.): 24 h Power supply: 4 x 1.5 V LR6 (AA) Projection: 3 lines + 1 plumb point Scope of supply M00 4 x 1.5 V LR6 (AA) batteries ✓ Manufacturer's certificate ✓	Laser diode: 635 - 650 nm	
Power supply: 4 x 1.5 V LR6 (AA) Projection: 3 lines + 1 plumb point Scope of supply M00 4 x 1.5 V LR6 (AA) batteries ✓ Manufacturer's certificate ✓	Laser class: 2	
Projection: 3 lines + 1 plumb point Scope of supply M00 4 x 1.5 V LR6 (AA) batteries ✓ Manufacturer's certificate ✓	Operating time (max.): 24 h	
Scope of supply M00 4 x 1.5 V LR6 (AA) batteries ✓ Manufacturer's certificate ✓	Power supply: 4 x 1.5 V LR6 (AA)	
4 x 1.5 V LR6 (AA) batteries ✓ Manufacturer's certificate ✓	Projection: 3 lines + 1 plumb point	
Manufacturer's certificate	Scope of supply	M00
	4 x 1.5 V LR6 (AA) batteries	1
Protective bag 🗸	Manufacturer's certificate	1
	Protective bag	1
Tripod Adapter 🗸	Tripod Adapter	1

Target Groups / Applications:

Easy positioning on given reference marks for interior finishing tasks and transfer applications.



Horizon leveling - suspending drop ceiling, building floor, paneling, mount shelves or cupboards, install windows.



Vertical leveling - building dry wall frame work, fixing drain pipes, hanging furniture, mounting doors / windows.

Optical Level GOL 32 D Professional (Complete Set)

Robust and reliable - ideal for outdoor use





Advantages

- 32 x magnification, 120m working range.
- Ideal for outdoor use due to a robust housing with dust and splash protection (IP54).

1.5 kg

- Fast aperture for excellent staff reading
- Compensator lock for safe transport.



Technical data

Order number: 0 601 068 ...

Length: 215 mm

Width: 135 mm

Height: 145 mm

Accuracy: 1 mm at 30 m

Dust and splash protection: IP 54

Weight, approx.: **1.5 kg**

Tripod thread: 5/8"

Unit of measure: 360 degrees

Magnification: 32 x

Scope of supply	502
Adjusting pin	1
Hex key	1
BT 160 Professional tripod (0 601 091 200)	1
GR 500 levelling staff (0 601 094 300)	1
Lens cover	1
Plumb bob	1

Target Groups / Applications:

- Users who require 120m working range and 32 x optical zoom.
- Concrete form builders, excavation contractors, surveyors, road construction companies, general contractors, home builders, drainage contractors.
- Excavation contractors use an auto level and leveling rod to determine cut and fill rates to make sure a job site is level.
- Contractors who specialize in foundations use auto levels to make sure the forms are set level.
- General contractors will use an auto level to check the contractors work.
- Contractors can use an auto level to determine how much higher a building is in relation to the street, gutters and drainage ditches.

Detector GMS 120 Professional

The preferred multi-detector in its class



Advantages

- · Automatic calibration avoids application errors for more reliable and confident work .
- Locate metal and live wire in various wall types as well as wooden substructures in drywall.
- Detects objects in walls before drilling for increased safety, ideal for renovation work.



Target Groups / Applications:

Users who performing drilling or fixing jobs in daily lives and need reliable information of type and location of objects.

01

(02)

Electricians, plumbers, drywall fitters, interior construction, kitchen installers who want to reduce the risk element of drilling into unknown areas and be provided information of what element they may be drilling into.





Laser Measure **GLM 50-22 Professional**

Robust design to withstand rough jobsites

Line Laser

GLL 2-20 G Professional

The tough, green laser solution



QUALITY MADE AFFORDABLE.



Green Line Laser GLL 3-80 G Professional

3 x 360° bold green lines for optimal visibility.




Rotation Laser GRL 600CHV Professional

The best solution for outdoor levelling





AS ROBUST AS THEY ARE PRECISE.

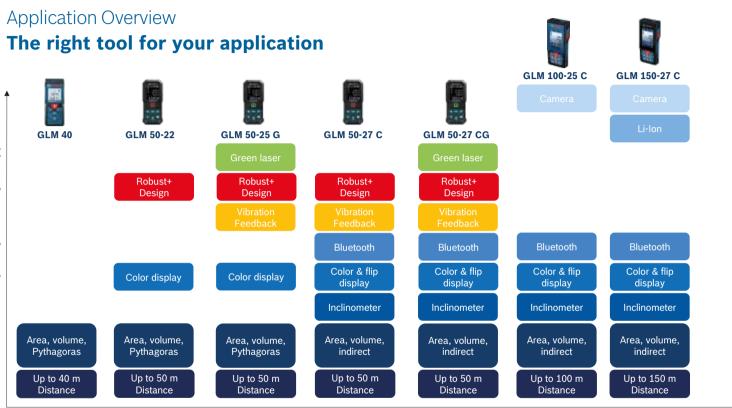

Measuring Distance

MEASURING PORTFOLIO.

Application Overview The right tool for your application

Ideal O Suitable O Possible — Unsuitable

	POINT	DINT LASERS					COMBI LASERS				PLANE LASERS			
	1	Ð	۲		ß			E	E	6	٢	\$	\$	
Horizontal	GPL 3 G	GPL 5 G	GLL 2-15 G	GLL 3-15 X	GLL 2-20 G	GLL 5-50 X	GCL 2-50	GCL 2-50 G	GCL 2-50 C	GCL 2-50 CG	GLL 3-80	GLL 3-80 G	GLL 3-80 C	GLL 3-80 CG
levelling Vertical			-	-	-	-	-	-		-		-		
levelling		-	•	•	•	•	•	•	•	•	•	•	•	•
Plumb function	•	•	-	•	-	•	•	•	•	•	•	•	•	•
Alignment of cabinets	-	-	•	•	•	•	•	•	•	•	•	•	•	•
Allignment of windows, doors	0	0	•	•	•	•	•	•	•	•	•	•	•	•
Laying of pipies, electrical cables	-	_	•	•	•	•	•	•	•	•	•	•	•	•
Point transfer from ground to ceiling	•	•	-	•	-	•	•	•	•	•	•	•	•	•
Tiling on wall and floor	-	_	•	•	•	•	•	•	•	•	•	•	•	•
Alignment of ceiling lights	-	-	•	•	•	•	•	•	•	•	•	•	•	•
Squaring / partitioning	-	0	-	•	0	•	-	-	-	—	•	•	•	•
Dropceiling installation	-	-	•	•	•	•	0	0	•	0	•	•	•	•
Building frame- work for drywall	0	•	-	•	•	•	0	0	•	0	•	•	•	•
Mounting plug sockets	0	0	•	•	•	•	•	•	•	•	•	•	•	•

LEVELLING PORTFOLIO.



44,500^{KES*}

ROBUST AND RELIABLE.

Ideal for outdoor use.

GOL 32 D Professional Optical level.

Robert Bosch East Africa Ltd. Power Tools Division

Delta Chambers, 7th Floor Waiyaki Way - Westlands, Nairobi Sales: 0790 205 211 / 0799 447 117



Callibration services available. CALL US NOW!

Dealer Stamp