




BOSCH

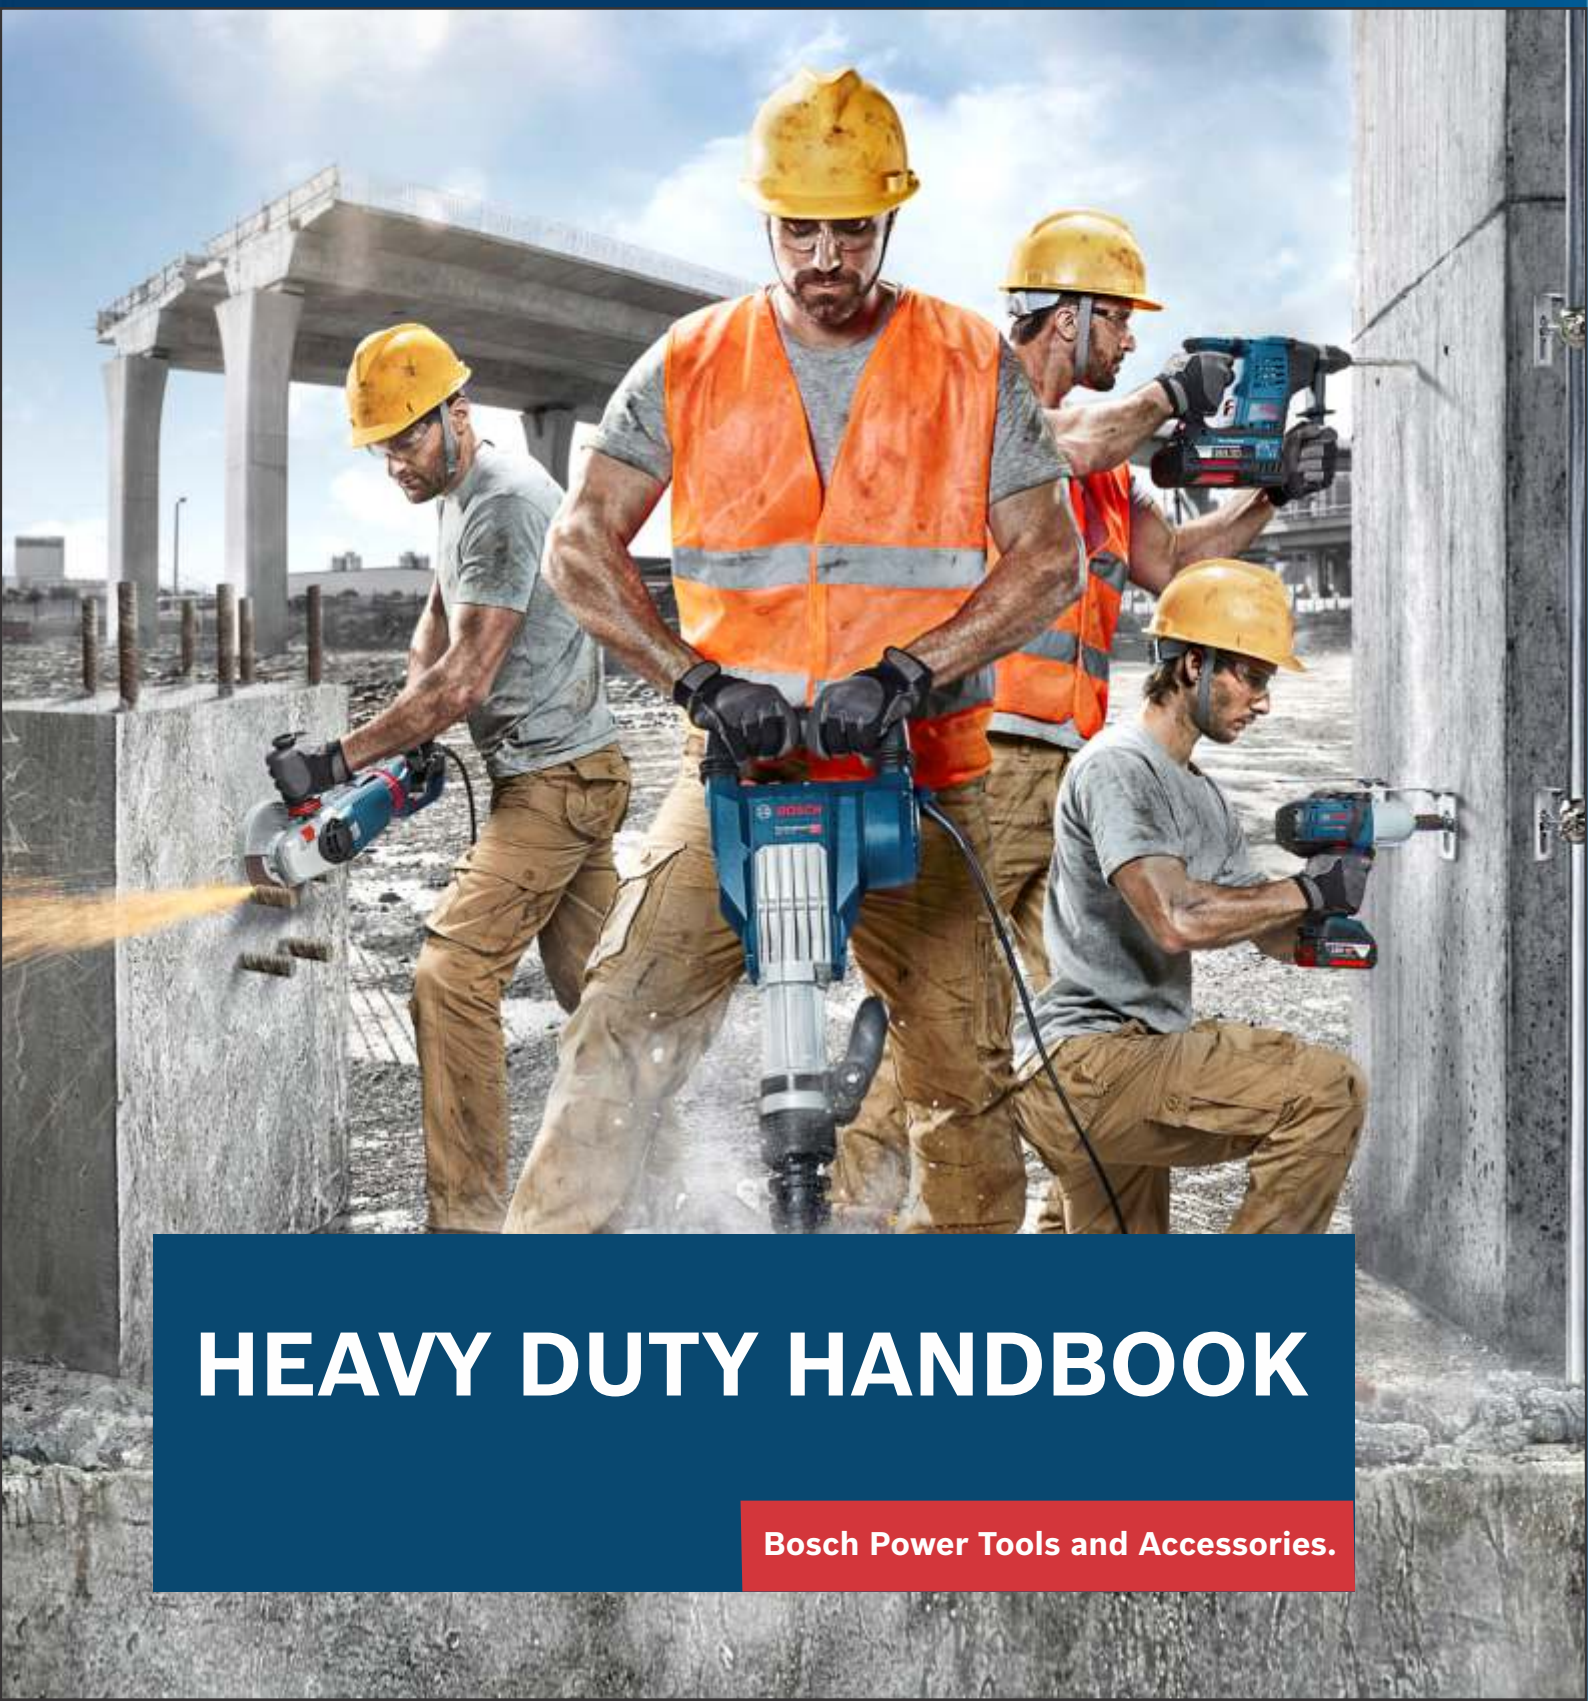

HEAVY DUTY HANDBOOK

Bosch Power Tools and Accessories.



YOU DO THE JOB. WE MAKE IT SAFER.

Intelligent PROtection makes powerful work safer.





We at Bosch Professional develop and manufacture power tools with integrated, active PROtection features – innovative tools that reduce the risk of injury or long-term diseases independently, while providing you best performance even under the toughest conditions.

► **ACTIVE:**

Safer work – thanks to integrated, active PROtection solutions that work independently.

► **INTELLIGENT:**

Reduction of risks – thanks to sensor based technologies that identify dangers and intervene as a precautionary measure .

► **COMPREHENSIVE:**

Higher protection than standard across the range – thanks to a broad selection of PROtection features based on proven Bosch technology in more than 200 Bosch Professional power tools.

EXPERT

ACCESSORY RANGE

THE BEST YOUR TOOL CAN GET.

Our new high-performance accessories series for all trades and materials. Harder, tougher, faster – EXPERT accessories do the hard work for you and last up to 100x longer than our standard accessories.



WHY EXPERT?

You can have the best power drill in the world, but it won't make hard work easier unless you equip yourself with the best drill bits. Boost your efficiency with EXPERT accessories by working easier, faster, longer – and with greater precision.

UP
TO 100x*



LONG LIFE

UP
TO 5x*



SPEED

UP
TO 5x*



PRECISION

UP
TO 30%*



PROTECTIVE

UP
TO 4x*




NO DUST

DISCOVER THE NEW EXPERT RANGE FOR EFFICIENT WORKING

The EXPERT range features the best and most innovative power tool accessories for all trades and challenges. Each one offers a proven performance advantage to the demanding professional. EXPERT means working faster, cleaner, with greater precision, and making light of the toughest materials. Can you afford not to use EXPERT?



Explore more here:
bosch-expert.com

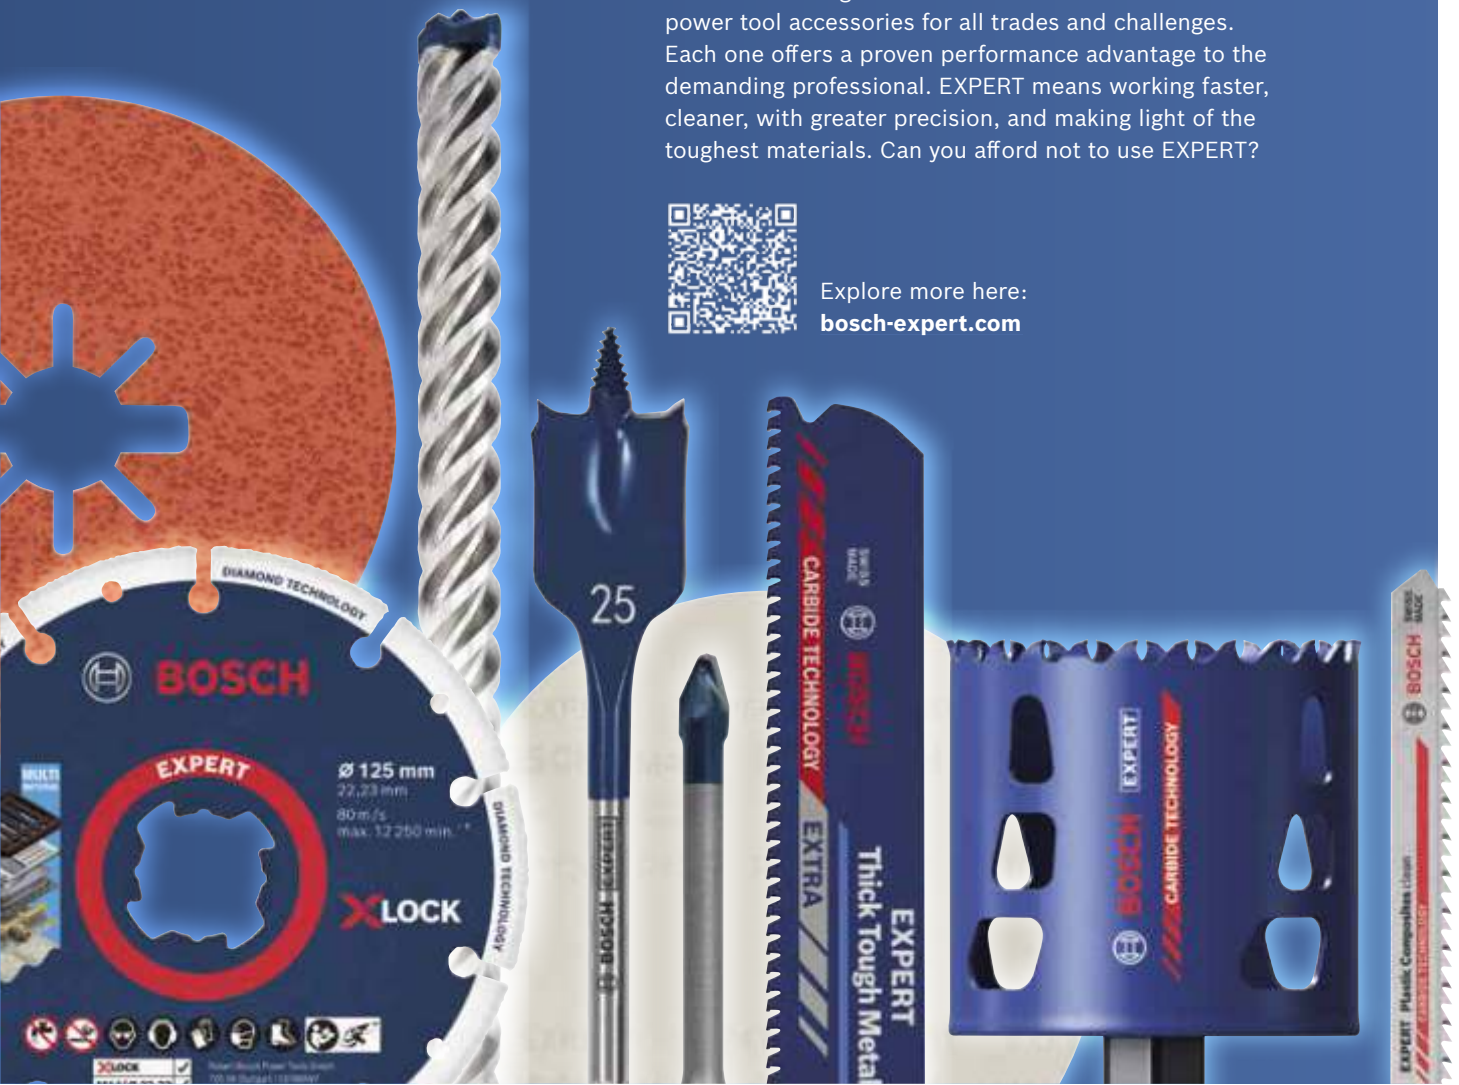



BOSCH

LET US TAKE CARE OF YOUR TOOL

Safe, Conscientious and Fast: Repairs by Bosch

Pickup and
drop-off
arrangement*





Content

Energy & Mining 10



Energy & Mining	10
Pipeline Manufacturing	11
Surface Finishing	12
Under-earth Exploration	14
Excavation Set-up	15
Fitting & Fixtures	18
Pipe Cutting	19
Renewable Energy	20
Surface Finishing	20
Drilling/Fastening	21

Construction 22



Construction	22
Structure Engineering	23
Foundation	25
Correction/Concrete Repair	26
Rebar/Anchoring	30
Waterproofing	35
Plumbing & Electrical Engineering & HVAC	38
Core Cutting	39
Anchor Drilling	41
Piping Installation	42
Interior Decoration	46
Windows & Doors	46
Woodworking	50
Ceiling Hanging	56
Drywalling	56
Electrical Installation	57

Façade	58
Drilling	58
Cutting	60
Flooring	62
Tiling	62

Industrial and Manufacturing 64



Industrial and Manufacturing

Industrial and Manufacturing	64
------------------------------	----

Measuring Tools 73



Measuring Tools

Measuring Technology	73
----------------------	----

Electrical Tools 92



Electrical Tools

Electricity	92
-------------	----

HEAVY DUTY

We deliver unmatched endurance coupled with reliability and world-class performance. All Bosch products are powered by innovation and technology engineered to outlast customer expectations.

For over a century, Bosch has been dedicated to creating advanced, efficient solutions for professionals at work.

Continual innovation, intensive research and development have helped Bosch create this new Heavy Duty product range, designed to make your every heavy duty task easier by providing the optimum solution.



All Heavy Duty products are designed to handle extremely demanding jobs by giving users more of everything!

POWER

Each product is built with enough power to drill, hammer and cut through the toughest problems with extreme ease.

PERFORMANCE

Increased power naturally leads to higher performance that results in the most efficient solution possible.

ROBUSTNESS

The same tool can solve every need you might have for many years to come because each one is built to last-guaranteed!

Every tool in the Bosch Heavy Duty Range comes with a one-year warranty.

In this handbook, we will proudly introduce our Heavy Duty tools along with the facilitating technologies, detailed product features and user benefits. Some examples of industry specific applications in different user environments are included to help you select the right solution for your task at hand. You are sure to find the tool you need in our comprehensive product range.

**Bosch Heavy Duty
Designed to outlast all your demands.**

Energy & Mining

Every part of energy & mining industry is critical, demanding careful, stringent and tough applications. Safe, stable and robust power tools are required in the entire process of this industry.



Pipeline Manufacturing



Under-earth Exploration



Renewable Energy



Maintenance

Energy & Mining ► Pipeline Manufacturing ► Surface Finishing

GWS 9-115 / 125

900 W paddle switch SAG delivers an incredible grip on safety and power



Tool does not come with disc

- Powerful 900-watt motor for fast work progress
- High work efficiency due to long lifetime and carbon brush lifetime
- Ergonomic shape for maximum control in various grip positions

GWS 9-115/125 Professional SKU: 0601396505 SKU:06013960K7		
	Unit	Specifications
Rated power input	W	900
No-load speed	rpm	11000
Grinding spindle thread	M	14
Disc diameter	mm	115/125
Rubber backing pad, diameter	mm	73
Wire cup brush, diameter	mm	280
Length	mm	100
Weight	kg	1.9



GWS 14-125

The most durable tool in its class




Tool does not come with disc

- Powerful 1400-watt motor for tough work progress
- High comfort due to a significant smaller grip circumference
- High user protection through KickBack Control, restart protection and side grip with Vibration Control

GWS 9-125 Professional SKU: 06017D0100		
	Unit	Specifications
Rated power input	W	1400
No-load speed	rpm	11500
Power output	W	450
Grinding spindle thread	mm	M 14
Disc diameter	mm	125
Length	mm	327
Height	mm	108
Weight	kg	2.2

Accessories		Expert for Metal grinding
		2608600223
Top-class grinding discs for metal for the highest requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s Cutting discs for metal for high requirements		

Accessories		Expert for Metal cutting
		2608600221
Cutting discs for metal for high requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s		

Energy & Mining ► Pipeline Manufacturing ► Surface Finishing

GWS 17-125

Intelligent Brake System for efficient working with high user protection




Tool does not come with disc



- Efficient and convenient to use: powerful 1700 watt motor and up to 70% shorter run-down time
- The magnetic brake system is independent of external influences such as dust or oil and works reliably even if there is a power outage
- Maintenance-free brake system with no effect on lifetime of tool and carbon brushes

GWS 17-125 Professional SKU: 06017D0200	Unit	Specifications
Rated power input	W	1700
No-load speed	rpm	2800 - 11500
Grinding spindle thread	M	14 x 1,5
Disc diameter	M	14
Rubber backing pad, diameter	mm	125
Weight	kg	2.2

Accessories		Expert for Inox straight cutting disc AS 60 T INOX BF, 125 mm, 1,0 mm (Rapido!)
		2608600549
Cutting discs for inox for high requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s		

GWS 180-LI

User Upgrade from Corded to Cordless with affordable solutions!





Tool does not come with disc



- High-performance Brushless motor delivers 700W Corded equivalent power
- Balanced design and slim handle, specifically optimised for versatile cutting
- Increased productivity thanks to improved efficiency and runtime
- Next-level convenience thanks to slim handle design and keyless guard

GWS 180-LI Professional SKU: 06019H9021	Unit	Specifications
Battery voltage	V	18
No-load speed	rpm	11000
Grinding spindle thread	mm	14

Accessories		Expert for Metal grinding
		2608600223
Top-class grinding discs for metal for the highest requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s		

Accessories		Expert for Metal cutting disc with depressed centre A 30 S BF
		2608600221
Cutting discs for metal for high requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s		

Energy & Mining ►► Under-earth Exploration ►► Surface Finishing

GGG 30 LS

The handy tool for universal grinding working



- Easy and convenient accessory change with handy spindle lock function
- Ergonomic tool with a powerful 750-watt grinding performance
- All-round safety features with KickBack Control, soft start, speed selection and restart protection

GGS 30 LS Professional

SKU: 06012B50P0

	Unit	Specifications
Rated power input	W	750
No load speed	rpm	33000
Bit holder	mm	Collets up to 8mm

Accessories



Set five grinding stones

1609200286

Appropriate for all straight grinders with collets and for drills

- for non-hardened and hardened steel
- Shapes of stones: round, half-round, cylindrical, disc-shaped, tapered



GGG 28 C

The handy tool for universal grinding working



- Powerful 650-watt motor for fast work progress with soft start
- KickBack Control: detects when the tool is jammed and shuts it down immediately – for a high level of user protection
- Compact, ergonomic shape for versatile grinding work

GGS 28 LCE

SKU: 0601220000

	Unit	Specifications
Rated power input	W	650
No load speed	rpm	30000
Bit holder	mm	Collets up to 8mm

Accessories



Set five grinding stones

1609200286

Appropriate for all straight grinders with collets and for drills

- for non-hardened and hardened steel
- Shapes of stones: round, half-round, cylindrical, disc-shaped, tapered

Energy & Mining ►► Under-earth Exploration ►► Excavation Set-up


GWS 9-115 / 125

900W paddle switch SAG delivers and incredible great on safety and power



Tool does not come with disc

- Enhanced user protection thanks to paddle switch that instantly cut off power to the machine when the switch is realised
- Superior cutting and grinding experience

GWS 9-115/125 Professional		Unit	Specifications
SKU:0601396505 SKU:06013960K7			
Rated power input	W		900
No-load speed	rpm		11000
Grinding spindle thread	M		10/14
Rubber backing pad, diameter	mm		115/125
Weight	kg		1,9
Accessories			2608600218
	Grinding discs for metal for high requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s		





GWS 30-230

Compact, Powerful, Precise



Tool does not come with disc

- Powerful 2800 watt brushless motor with highest material removal rate and PROtection switch, KickBack Control, brake, and vibration Control

GWS 30-230 Professional		Unit	Specifications
SKU: 06018G1000			
Rated power input	W		2800
No-load speed	rpm		6500
Grinding spindle thread	M		14
Disc diameter	mm		230
Weight	kg		5.9
Accessories			Expert for Metal cutting disc with depressed centre A 30 S BF, 230 mm, 3,0 mm 2608600226
	Cutting discs for metal for high requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s		
Accessories			Expert for Metal grinding disc with depressed centre A 30 S BF, 230 mm, 6,0 mm 2608600228
	Top-class grinding discs for metal for the highest requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s		


Energy & Mining ►► Under-earth Exploration ►► Excavation Set-up

GSH 11 VC

The strongest 11kg SDS-max breaker in its class



- Best power-to-weight ratio in its class
- Vibration Control System
- Inline shape of the tool

GSH 11 VC Professional		Unit	Specifications
SKU: 0611336000			
Impact energy	J	23	
Impact rate at rated speed	bpm	900-1700	
Rated power input	W	1700	
Toolholder		SDS-max	
Weight	kg	11.4	
Accessories			Rtech Self-sharpening point and flat chisel
			2608690124
			2608690167
	Less jamming and more progress due to the self-sharpening feature To work efficiently without downtimes and time-consuming resharping		




GBH 12-52 DV

The most powerful rotary hammer from Bosch



- Top performance when drilling and chiselling thanks to 1700 watt motor and 19 joules of single impact energy
- Automatic switch lock for the best convenience in continuous chiselling applications
- Long lifetime due to robust metal components

GBH 12-52 DV Professional		Unit	Specifications
SKU:0611266000			
Impact energy	J	19	
Rated power input	W	1700	
Impact rate at rated speed	bpm	1750-2150	
Rated speed	rpm	0-220	
Toolholder		SDS-max	
Weight	kg	11.9	
Accessories			
	Hammer drill bit SDS Max 8X		
	2608578613		
	2608578612		
• Suitable for concrete and reinforced concrete, limestone, masonry			

Energy & Mining ►► Under-earth Exploration ►► Excavation Set-up

GSH 27 VC

The most powerful electric breaker from Bosch



Machine does not come with chisel

- High impact performance due to 62 joules of impact energy and 1000 blows per minute
- Very low vibration (only 8.5 m/s²) thanks to the decoupled handles and the vibration-reduced hammer mechanism – for a longer trigger time per day
- Very long lifetime thanks to high-quality components made of aluminium and steel

GSH 27 VC Professional SKU:061130A000	Unit	Specifications
Rated power input	W	2000
Impact energy	J	62
Impact rate at rated speed	bpm	1000
Weight	kg	29,5
Tool holder	mm HEX	28

Accessories		Flat and Pointed chisel 28mm HEX Shank
		1618600206
		1618600019
	RTec Sharp flat chisel, self-sharpening, Long Life with 100% higher material removal rat	



Energy & Mining ► Under-earth Exploration ► Fitting & Fixtures

GBH 187

Cordless Rotary Hammer with SDS plus



- One Chuck - A single chuck that can fit both SDS-plus and cylindrical/hex drill bits for your wide range of applications.
- Efficiency champion for drilling holes fast with just one battery charge
- Optimized brushless motor and mechanism for faster work with KickBack and Vibration Control protection systems



GBH 187 Professional

SKU: 06119231L0

Unit

Specifications

Max. impact energy	J	2,4
Rated speed	rpm	0-4.350
Battery voltage	V	18
Drilling dia. concrete, hammer drill bits	mm	4-24mm

Accessories		Hammer drill bit SDS-plus-5X
		2608833794
		2608833827
Suitable for masonry, concrete and reinforced concrete Appropriate for all Rotary hammers with SDS-plus holder		




Energy & Mining ►► Under-earth Exploration ►► Pipe Cutting

GSA 120

Comfortable working at maximum cutting performance



- Low-friction transmission system and optimised motor heat release extend the durability
- The 1,200 W motor, highest power in its class makes cutting effortless
- The combination of soft & hard materials in handle ensures a comfortable grip in any position

GSA 120 Professional		Unit	Specifications
SKU: 06016B1020			
Rated power input		W	1200
No-load stroke rate		spm	0-3000
Weight without cable		kg	3.7
Accessories			Sabre saw blades - Endurance for StainlessSteel
			2608653096
	Ultimate Blade Life in Stainless Steel		

GCO 220

The Bosch range for cut-off saw



Comes with a complementary cutting disc

- Powerful cutting performance: Improved motor design to make tough cutting easier
- Long life span: Improved gearing system increases longevity
- Easy to carry: Reduced base size improves portability

GCO 220		Unit	Specifications
SKU: 0601B373L0			
Cutting disc diameter		mm	355
Cutting disc bore		mm	25,4
No-load speed		rpm	3,800
Weight		kg	15,0
Accessories			Expert for Metal straight cutting disc A 36 R BF, 350 mm, 25,40 mm, 2,8 mm
			2608600543
	Appropriate for chop saws/stationary pendulum action cutters/grinders		
	Maximum drive power of 3 bhp/2.4 kW		

GCD 12JL

An excellent investment on productivity



Comes with a complementary carbide disc

- Precise results and little rework thanks to minimum discolouration and low levels of burr formation with "Expert for Steel" saw blades
- Integrated laser allows precise cutting guidance
- Up to 100% spark-free for a safe working environment

GCD 12JL		Unit	Specifications
SKU: 0601B28000			
No-load speed		mm	1500
Weight		kg	20
Sound pressure level		dB(A)	100
Sound power level		dB(A)	113
Accessories			Circular Saw Blade Expert for steel 305 x 25.4 x 2.6 mm, 60
			2608643060
	Very long lifetime. For clean cuts through steel		

Energy & Mining ► Renewable Energy ► Surface Finishing

GPO 14 CE

The handy tool for highly polished results



Comes with complimentary wood bonnet

- Good handling due to ergonomic handle with softgrip
- Compact tool with only 2.5 kg – for comfortable working
- Powerful 1400 watt motor with soft start for low-fatigue polishing of large surfaces

GPO 14 CE Professional

SKU: 0601389003

Unit

Specifications

Rated power input	W	1,400
No-load speed	rpm	750 - 3000
Grinding spindle thread	M	14
Rubber sanding plate, diameter	mm	180
Weight	kg	2.5

Accessories



Lamb's wool bonnets

2608612026

For Polishing Old Varnish and Surfaces After Sanding



Energy & Mining ► Renewable Energy ► Drilling Fastening

GDS 18 E

The versatile tool for powerful screw driving



- For wheel fitting on cars, scaffolding and shelf construction, in the workshop and in service centres
- Favourable centre of gravity thanks to centre grip enables fatigue-free one-handed operation
- High impact performance with low weight

GDS 18 E Professional

SKU: 0601444000

	Unit	Specifications
Rated power input	W	500
No-load speed	rpm	800-1900
Impact rate	bpm	1000-2600
Toolholder		1/2" external square
Torque, max. (hard screw driving applications)	Nm	250

Accessories



9-piece socket set

2608551101

1/2" Shank inch Socket set with length 38 mm. Socket sizes in set 10, 11, 13, 17, 19, 21, 22, 24, 27 mm

GDS 24

The versatile tool for powerful screw driving



- For wheel fitting on trucks, screw joints in steel construction and mechanical engineering, as well as in tank and pipeline construction
- Auxiliary handle with backing pad that can be fitted in two positions for better handling
- Hanging hook for attaching to a balancer

GDS 24 Professional

SKU: 0601434108

	Unit	Specifications
Rated input power	W	800
Voltage, electrical	V	230
Rated speed	rpm	950
Weight	kg	5.7
Torque, max. (hard screwdriving applications)	Nm	600
Torque, max. (soft screwdriving applications)	Nm	300
Bit holder	Square	3/4"

GBH 4-32 DFR

The fastest multi-hammer in the 4kg class



Tool does not come with drill bit

- Wide range of applications in chiselling and drilling work and when working with a core cutter
- Drills up to 30% faster (25 mm diameter) than other tools in its class
- Low vibration levels of only 12 m/s² for less tiring work due to Bosch Vibration Control

GBH 4-32 DFR Professional

SKU: 0611332100

	Unit	Specifications
Impact energy	J	4,2
Rated power input	W	900
Impact rate at rated speed	bpm	0-3600
Rated speed	rpm	0-800
Toolholder		SDS-plus
Max. drilling capacity	mm	32
Weight	kg	4.7

Accessories



SDS plus 5x hammer drill bits

2608833794

Faster than any other drill bit in concrete and reinforced concrete
Extremely robust and aggressive solid carbide for an aggressive drilling rate and long lifetime in tough application



Structure Engineering



Plumbing & Electrical Engineering & HVAC



Interior Decoration



Flooring



Ceiling Hanging



Façade



Concrete Steering



Marble Cutting

Construction

Every application in construction is highly demanding and needs sophisticated tools to cope with the heavy load. To help you complete the job on time and with quality, Bosch offers exceptional solutions with our powerful and robust tools and accessories.



Construction ► Structure Engineering ► Foundation

GVC 22 EX

Best relation between weight and power in class



Tool comes with complimentary hose

- High power and weight rate
- Security features (only Bosch offers): PRCD switch & Security fusible
- User friendly: easy click system for hose exchanging & portable design

GVC 22 EX Professional SKU: 06012831K1	Unit	Specifications
Power input	W	2200
Electric frequency	Hz	50/60
Nominal frequency vibrations	vpm	15000
Amplitude	mm	4.3
Security switch PRCD		Yes
Security fusible		Yes
Hose variants	mm	3.5

Accessories		Standard accessories included
		0 601 283 1K1
	Hose included due to the exclusivity of the hose system and the most common size covering the main applications	



Construction ► Structure Engineering ► Correction/Concrete Repair

GNF 35 CA

The durable tool with Constant Electronic



- Patented dustproof system from Bosch guarantees longest lifetime
- With Constant Electronic for constant speed, also under heavy load
- Optimum handling due to ergonomic grip design and flexible gripping option

GNF 35 CA	Unit	Specifications
SKU: 0601621703		
Adjustable groove depth	mm	0 - 35
Cutting width	mm	3 - 39
No-load speed	rpm	9300
Disc-diameter	mm	150
Rated power input	W	1400

Accessories		Standard for Universal diamond cutting disc 150 x 22,23 x 2 x 10 mm
		2608615061
	Reliable Cuts in Concrete	

GNF 65 A

The powerful tool with lots of comfort



- Powerful 2400 watt motor
- Convenience due to starting current limitation and smooth start for more precise working
- Cutting depth can be set steplessly with a scale

GNF 65 A	Unit	Specifications
SKU: 06011368703		
Adjustable groove depth	mm	20 - 65
Cutting width	mm	3 - 40
No-load speed	rpm	5200
Disc-diameter	mm	230
Rated power input	W	2400

Accessories		Diamond cutting disc Professional for Concrete 230 x 22,23 x 2,3 x 10 mm
		2608602200
	Reliable Cuts in Concrete	

GSH 11 E

The specialist tool for breakthroughs and demolition work



Comes with complimentary chisel

- Extreme impact force with 25 J
- Low-vibration in operation and no-load
- Low feed pressure, for fatigue-free working

GSH 11 E Professional	Unit	Specifications
SKU: 0611316773		
Impact energy	J	16,8 - 25
Impact rate at rated speed	bpm	900 - 1890
Toolholder		SDS-max
Rated power input	W	1500
Weight	kg	10.1

Accessories		Rtech Self-sharpening point chisel
		2608690124
		2608690167
	Less jamming and more progress due to the self-sharpening feature To work efficiently without downtimes and time-consuming resharpening	

Construction ► Structure Engineering ► Correction/Concrete Repair

GSH 11 VC


The strongest 11kg SDS-max breaker in its class



Comes with a complementary chisel

- Best power-to-weight ratio in its class
- Vibration Control System
- Inline shape of the tool

GSH 11 VC Professional	Unit	Specifications
SKU: 0611336000		
Impact energy	J	23
Impact rate at rated speed	bpm	900-1700
Rated power input	W	1700
Toolholder		SDS-max
Weight	kg	11.4

Accessories		Rtech Self-sharpening point chisel
		2608690124
		2608690167
	<p>Less jamming and more progress due to the self-sharpening feature To work efficiently without downtimes and time-consuming resharpening</p>	



GSH 16-28


Extreme power for 13 tons of material removal per day



Comes with complimentary chisel

- Highest material removal rate due to 41 J single impact force and 1750 watts motor power
- Longest lifetime due to robust design and use of high-quality materials
- Vibration Control for reduction of harmful vibration and, therefore, longer operating time and greater ease of use

GSH 16-28 Professional	Unit	Specifications
SKU: 0611335000		
Rated power input	W	1750
Impact energy	J	41
Impact rate at rated speed	bpm	1300
Weight	kg	17,9
Tool holder	mm HEX	28

Accessories		Flat and point chisel, SDS-max
		1618600206
		1618600019
	Rtec Sharp flat chisel, self-sharpening. Long Life with 100% higher material removal rate	

Construction ► Structure Engineering ► Correction/Concrete Repair

GSH 27 VC




The most powerful electric breaker from Bosch



Does not come with a complimentary chisel

- High impact performance due to 62 joules of impact energy and 1000 blows per minute
- Very low vibration (only 8.5 m/s²) thanks to the decoupled handles and the vibration-reduced hammer mechanism – for a longer trigger time per day
- Very long lifetime thanks to high-quality components made of aluminium and steel

GSH 27 VC Professional SKU: 061130A000	Unit	Specifications
Rated power input	W	2000
Impact energy	J	62
Impact rate at rated speed	bpm	1000
Weight	kg	29,5
Tool holder	mm HEX	28

Accessories		Flat and point chisel, SDS-max
		1618600206
		1618600019
Rtec Sharp flat chisel, self-sharpening. Long Life with 100% higher material removal rate		

GAS 55 M AFC

The versatile wet/dry dust extractor with automatic filter cleaning and large tank volume



- Space-saving flat-pleated filter for optimum utilisation of the 55 litre tank – ideal for large amounts of dust
- Sustained suction power for continuous work progress due to automatic filter cleaning (AFC)
- Certified safety dust extractor that meets dust class M in accordance with the EU standard, covering the majority of types of dust to provide a high level of user protection

GAS 55 M AFC SKU: 06019C3300	Unit	Specifications
Max. input power	W	1,380
Rated input power	W	1,200
Weight	kg	16.2
Container volume, gross	l	55
Container volume, net	l	43
Container volume, net, water	l	40
Dust class of wet/dry extractor		M
Dust class of main filter		M

GAS 35 M AFC

The versatile wet/dry dust extractor with automatic filter cleaning



- L-BOXX can be clicked onto it to provide a practical transport and storage solution for mobile use
- Sustained suction power for continuous work progress due to automatic filter cleaning (AFC)
- Certified safety dust extractor that meets dust class M in accordance with the EU standard, covering the majority of types of dust to provide a high level of user protection

GAS 35 M AFC SKU: 06019C3100	Unit	Specifications
Max. input power	W	1,380
Rated input power	W	1,200
Weight	kg	12.4
Container volume, gross	l	35
Container volume, net	l	23
Container volume, net, water	l	19.2
Dust class of wet/dry extractor		M
Dust class of main filter		M

Construction Structure Engineering ► Correction/Concrete Repair

GBG 60-20

The powerful and sturdy tool for toughest applications



- Powerful induction motor for various working conditions and usages
- Compact die-cast housing with encapsulated ball bearings to keep the motor free of dust
- Robust and solid base for longevity and stable working condition

GBG 60-20 SKU: 060127A400	Unit	Specifications
Grinding wheel diameter	mm	200
No-load speed	rpm	3,600
Grinding wheel widths	mm	25
Grinding wheel bore	mm	35
Grit		24 , 60
Rated input power	w	600
Weight	kg	15

GDE 115/125 FC-T

The first worklight with smartphone remote control



Available in August 2025

- Dust extraction the professional way – very high dust extraction efficiency combined with easy handling

GDE 115/125 FC-T SKU 1600A003DK

Adjustable cutting depth

Easy Connection to the vac

- Connection via rubber adapter
- Direct connection via "Click & Clean"

Easy handling

- Easy to mount
- Well balanced design
- Flexible dust collar
- Integrated wheels

High efficient Dust extraction

- Absorbing most of the dust for a healthier and cleaner working environment
- Ready for any regulations

GDE 230 FC-S

The powerful and sturdy tool for toughest applications



Available in August 2025

- Dust extraction the professional way – very high dust extraction efficiency combined with easy handling

GDE 230 FC-S SKU 1600A003DL

Adjustable cutting depth

Easy Connection to the vac

- Connection via rubber adapter
- Direct connection via "Click & Clean"

Easy handling

- Easy to mount
- Well balanced design
- Flexible dust collar
- Integrated wheels

High efficient Dust extraction

- Absorbing most of the dust for a healthier and cleaner working environment

Construction ► Structure Engineering ► Rebar & Anchoring

GWS 9-115/125

900W paddle switch SAG delivers and incredible great on safety and power



Tool does not come with disc

- Enhanced user protection thanks to paddle switch that instantly cut off power to the machine when the switch is realised
- Superior cutting and grinding experience

GWS 9-115/125 Professional

SKU: 0601396505

Unit

Specifications

Rated input power	W	900
No-load speed	rpm	11000
Grinding spindle thread	M	10/14
Rubber backing pad, diameter	mm	115/125
Weight	kg	1,9

Accessories



Diamond cutting disc Professional for Universal 115 x 22,23 x 1,6 x 10 mm

2608615057

Reliable Cuts in Concrete



GWS 14-125

The handy Powerhouse



Tool does not come with disc

- Optimised motor cooling - for high overload capacity
- Anti-rotation protective guard-stand firms even if the disc breaks
- Constant electronic - keep the speed constant, even under overload

GWS 1000 Professional

SKU: 06017D0100

Unit

Specifications

Rated power input	W	1400
No-load speed	rpm	2,800 – 11,500
Voltage, electrical	V	230
Grinding spindle thread	M	14
Disc diameter	mm	125
Main handle	mm	Barrel
Bore size, diameter	mm	22.23
Weight	kg	2.2
Switch	Lockable Switch	

Accessories



Expert for Metal cutting disc with depressed centre A 30 S BF, 125 mm, 2,5 mm

2608600221

Cutting discs for inox for high requirements • Appropriate for hand-held angle grinders • Maximum circumferential speed: 80 m/s (depending on rpm and disc diameter) • Fe/S/Cl < 0.1%

Construction ► Structure Engineering ► Rebar & Anchoring

GWS 750-115


High productivity and the best user protection in its class



Tool does not come with disc

- High removal rate
- Great controlling and easy handling
- Improved motor cooling to handle long-time work
- High overload capability

GWS 750-115 Professional		Unit	Specifications
SKU: 06013940K2			
Rated power input	W	750	
No-load speed	rpm	11,000	
Disc diameter	mm	115	
Grinding spindle thread	m	14	
Weight	kg	1.8	

Accessories		Diamond cutting disc Professional for Concrete
		2608615059
	The low-cost diamond cutting disc that is a problem solver in concrete Sintered diamond cutting segments	



GBH 185-Li

The handy powerhouse



Tool does not come with disc

- More holes per charge and continuous power output thanks to motor with constant speed
- Better drilling experience due to Vibration Control, designed to absorb pulsation
- Enhanced safety against accidental jams thanks to KickBack Control
- Dust-free work condition with Auto Power GDE 12 extractor attachment

GBH 185-Li Professional		Unit	Specifications
SKU: 060119240L1			
Battery voltage	V	18.0	
Tool holder			SDS plus
Impact rate at rated speed	rpm	0 – 4,675	
Rated speed	bpm	0 – 1,050	
Weight excl. battery	kg	2.3	
BITURBO		No	


Construction ► Structure Engineering ► Rebar & Anchoring

GBH 2-24 DRE

The new standard in concrete drilling



- Best drilling speed in class due to optimized gear housing set
- Enhanced durability and hard work due to powerful 790 W motor
- Spare parts interchangeability and easy maintenance because of smart design

GBH 2-24 DRE Professional		Unit	Specifications
SKU: 06112721K0			
Impact energy		J	8.8
Impact rate at rated speed		bpm	0-4200
No-load speed		rpm	0-1300
Rated power input		W	790
Drilling capacity		mm	24
Weight		kg	2.8
Accessories			Hammer drill bit SDS-plus-5X
			2608833794
			2608833827
Suitable for masonry, concrete and reinforced concrete Appropriate for all Rotary hammers with SDS-plus holder			




GBH 2-28 DFR

Top performance with 20% less vibration



Tool does not come with drill bit

- Delivers 3.2 J of impact energy for high-power drilling performance
- KickBack Control for increased user protection
- Vibration Control for effortless and continuous work in time-intensive applications

GBH 2-28 DFR Professional		Unit	Specifications
SKU: 0611267561			
Impact rate at rated speed		bpm	0 – 4,000
Rated speed		rpm	0 – 900
Accessories			Hammer drill bit SDS-plus-5X
			2608833794
			2608833827
	Suitable for masonry, concrete and reinforced concrete Appropriate for all Rotary hammers with SDS-plus holder		

Construction ► Structure Engineering ► Rebar & Anchoring



GBH 5-40 DCE

The fast all-rounder with Vibration Control



- Fastest drilling rate in its class due to 1150 W motor and powerful hammer mechanism
- SDS-maxcomfort for easy and fast tool changes with one hand
- Vibration Control (10 m/s² for drilling, 8 m/s² for chiseling) ensures convenient working, even in time-intensive applications

GBH 5-40 DCE Professional		Unit	Specifications
SKU: 0611264000			
Impact energy	J		2-11
Impact rate at rated speed	bpm		1500-3050
Rated speed	rpm		170-340
Rated power input	W		1150
Toolholder			SDS-max
Weight	kg		6.8

Accessories	Hammer drill bit SDS Max 8X	
		2608578613
		2608578612

Available in diameter sizes from 14 mm to 26mm diameter bits with working length of 200 and 400mm with a full carbide four-cutter head
50% More Durability in Toughest Applications





GBH 8-45D

Powerful 1,500Watt and highest sturdiness!



- Peak performance in drilling and chiseling due to the 1,500W motor and 12.5 joule impact energy
- High sturdiness due to robust components
- Automatic lock-on switch for highest user comfort during continuous chiseling applications

GBH 8-45 DV Professional		Unit	Specifications
SKU: 0611265100			
Impact energy	J		12.5
Rated power input	W		1500
Impact rate at rated speed	bpm		1380-2760
Rated speed	rpm		0-305
Weight	kg		8.2

Accessories	Hammer drill bit SDS Max 8X	
		2608578613
		2608578612

Available in diameter sizes from 14 mm to 26mm diameter bits with working length of 200 and 400mm with a full carbide four-cutter head
50% More Durability in Toughest Applications

Construction ► Structure Engineering ► Rebar & Anchoring

GSH 500

Fast and Reliable - the NEW chipping specialist



- Great efficiency: High impact energy coupled with superior impact rate resulting in high chipping output
- Extended durability: Grease sealing ring to prevent leakage coupled with dust cap solution for better dust proof resulting long life time
- Ergonomic design: One hand Vario Lock design for 12 position chisel bit change, lock-on button for daily continuous work

GSH 5 Professional

SKU: 06113387L0

Unit

Specifications

Rated power input	W	1100
Impact energy	J	7.8
Impact rate at rated speed	bpm	2,900
Weight	kg	5.7

Accessories



Rtech Self-sharpening point chisel

2608690124

2608690167

Less jamming and more progress due to the self-sharpening feature
To work efficiently without downtimes and time-consuming resharpening



Construction ► Structure Engineering ► Waterproofing

GBH 2-28 F




Top performance with intelligent KickBack Control



- Best performance in its class with improved power
- Increased user protection with KickBack Control (KBC) in order to minimise the risk of injury
- Active vibration damping with counter oscillator for minimal vibration levels

GBH 2-28 F	Unit	Specifications
SKU: 0611267600		
Rated input power	W	880
Impact energy	J	3.2
Impact rate at rated speed	bpm	0 - 4000
Rated speed	rpm	0 - 900
Weight	kg	3.1
Tool holder		SDS-plus
Drilling dia. concrete, hammer drill bits	mm	4 - 28
Opt. appl. range concrete, hammer drill bits	mm	8 - 16
Drilling diameter in concrete with core cutters	mm	68
Max. drilling diameter masonry, core cutters	mm	68
Max. drilling diameter in metal	mm	13
Max. drilling diameter in wood	mm	30






Accessories		Hammer drill bit SDS-plus-5X
		2608833794
		2608833827
Suitable for masonry, concrete and reinforced concrete Appropriate for all Rotary hammers with SDS-plus holder		

GBH 187

Cordless Rotary Hammer with SDS plus



- One Chuck - A single chuck that can fit both SDS-plus and cylindrical/hex drill bits for your wide range of applications.
- Efficiency champion for drilling holes fast with just one battery charge
- Optimized brushless motor and mechanism for faster work with KickBack and Vibration Control protection systems

GBH 187 Professional	Unit	Specifications
SKU: 06119231L0		
Max. impact energy	J	2,4
Rated speed	rpm	0-4.350
Battery voltage	V	18
Drilling dia. concrete, hammer drill bits	mm	4-24mm
Accessories		Hammer drill bit SDS-plus-5X
		2608833794
		2608833827
Suitable for masonry, concrete and reinforced concrete Appropriate for all Rotary hammers with SDS-plus holder		

Construction ► Structure Engineering ► Waterproofing


GBH 4-32 DFR

The fastest multi-hammer in the 4kg class



- Wide range of applications in chiselling and drilling work and when working with a core cutter
- Drills up to 30% faster (25 mm diameter) than comparable competitor tools
- Low vibration values of only 12 m/s² for fatigue-free working due to Bosch Vibration Control

GBH 4-32 DFR Professional	Unit	Specifications
SKU: 0611332100		
Impact energy	J	4.2
Impact rate at rated speed	bpm	0-3600
Rated speed	rpm	0 - 800
Drilling dia. concrete, hammer drill bits	mm	6-32
Max. drilling dia. masonry, core cutters	mm	90
Max. drilling dia. steel	mm	13

Accessories		Hammer drill bit SDS-plus-5X
		2608833794
		2608833827
		Suitable for masonry, concrete and reinforced concrete Appropriate for all Rotary hammers with SDS-plus holder





GBH 5-40 D

The simple and efficient solution for basic SDS-max applications



- Vario-Lock: 12-fold adjustment of the chisel position, enabling you to adapt it to each work situation (e.g. when using tile chisels)
- Setting wheel for variable adjustment of the speed and impact rate for optimum performance
- Slim, compact impact mechanism for better weight distribution

GBH 5-40 D Professional	Unit	Specifications
SKU: 0611269000		
Impact energy	J	8.5
Impact rate at rated speed	bpm	1500 - 2900
Rated speed	rpm	170 - 340
Rated power input	W	1100
Bit holder		SDS-max
Weight	kg	6.8

Accessories			Hammer drill bit SDS Max 8X
			2608578613
			2608578612
			Available in diameter sizes from 14 mm to 26mm diameter bits with working length of 200 and 400mm with a full carbide four-cutter head 50% More Durability in Toughest Applications

Construction ► Structure Engineering ► Waterproofing




GBH 12-52 DV

The most powerful rotary hammer from Bosch



- Top performance when drilling and chiselling thanks to 1700 watt motor and 19 joules of single impact energy
- Automatic switch lock for the best convenience in continuous chiselling applications
- Long lifetime due to robust metal components

GBH 12-52 DV Professional		Unit	Specifications
SKU: 0611266000			
Impact energy	J	19	
Rated power input	W	1700	
Impact rate at rated speed	bpm	1750-2150	
Rated speed	rpm	0-220	
Toolholder		SDS-max	
Weight	kg	11.9	

Accessories		Hammer drill bit SDS Max 8X
		2608578613
		2608578612
	Available in diameter sizes from 14 mm to 26mm diameter bits with working length of 200 and 400mm with a full carbide four-cutter head 50% More Durability in Toughest Applications	





Construction ► Plumbing & Electrical Engineering & HVAC ► Core Cutting

GDB 180 WE

The compact powerhouse for drilling holes of up to 180 mm in concrete



- Powerful 2000 watt motor for breakthroughs in reinforced concrete up to 180 mm
- Long lifetime due to robust design and gearbox with oil-bath lubrication
- Wet and dry application; both hand-held and stand-mounted

GDB 180 WE Professional

SKU: 0601189800

	Unit	Specifications
Suitability		Wet drilling in concrete
Drilling range	mm	180
Rated power input	W	2000
Weight	kg	5.2

Accessories



Diamond wet core B95:C97 1 1/4" UNC Best for Concrete 52 mm, 450 mm, 5 segments, 11.5 mm

2608601359

Universal segment for concrete. Very high cutting performance and long life. Note: can only be used in machines designed for wet drilling. Use Bosch extractor GAS 35 M AFC or GAS 55 M AFC Professional for extraction.

GCR 180

Suitable for GDB 180 WE diamond drill



- Diamond drill is quickly mounted
- Robust construction for precise drilling
- Easy adjustment of the work angle

GCR 180 Professional

SKU: 0601190100

	Unit	Specifications
Total length	mm	767
Working length	mm	514
Core length max.	mm	530
Core diameter max.	mm	180
Angle adjustment	°	45
Collar size	mm	60
Weight	kg	9.5



Construction ► Plumbing & Electrical Engineering & HVAC ► Core Cutting


GDB 350 WE


Power through concrete-drill holes of up to 350 mm in diameter





- 3200 watt motor and 3-speed gearbox for core drilling up to 350 mm in reinforced concrete
- Long lifetime due to robust design and gearbox with oil-bath lubrication
- Stand-mounted drilling in a system with GCR 350 drill stand


GDB 350 WE Professional	Unit	Specifications
SKU: 0601189900		
Suitability		Wet drilling in concrete
Drilling range	mm	300/350*
Rated power input	W	3200
Weight	kg	11.9


Accessories		6 piece fixing sets 20 mm
		2607000745
Fixing Set (Brick) 20 mm		


Accessories		25-piece wall plug set 20 mm
		2607000747
25-piece wall plug set 20 mm		


Accessories		Adapter plate for 350 mm core cutters (extender) for 350 mm core cutters
		2608550628
Adapter plate for 350 mm core cutters (extender) for 350 mm core cutters		


Accessories		Rubber sealing ring GRC 350 extended length 810 mm
		2608550626
Rubber sealing ring GRC 350 extended length 810 mm		


Accessories		Vacuum set for GCR 180/350
		2608550623
Vacuum set for GCR 180/350		

Accessories		Diamond cutting disc Professional for Universal 115 x 22,23 x 1,6 x 10 mm
		2608550620
Reliable Cuts in Concrete		


Accessories		Seal cover 235 mm, for 2 609 390 389
		2609390391
Seal cover 235 mm, for 2 609 390 389		

Accessories		Water pressure container
		2609390308
Water pressure container		

Accessories		Wall plugs 50 pcs Set (Concrete) 16 mm
		2608002001
Wall plugs 50 pcs Set (Concrete) 16 mm		

Accessories		6 piece fixing sets (Concrete) 16 mm
		2608002000
Fixing Set (Concrete) 16 mm		

*300-350mm: additional distance plate required (2608550628)

Accessories		Diamond wet core cutters 1 1/4" UNC Best for Concrete 250 mm, 450 mm, 16 segments, 11.5 mm
		2608601381
Universal segment for concrete. Very high cutting performance and long life. Note: can only be used in machines designed for wet drilling. Use Bosch extractor GAS 35 M AFC or GAS 55 M AFC Professional for extraction.		

Construction ► Plumbing & Electrical Engineering & HVAC ► Anchor Drilling

GCR 350

Suitable for GDB 350 WE diamond drill



- Diamond drill is quickly mounted
- Robust construction for precise drilling
- Easy adjustment of the work angle using the angle scale

GCR 350 Professional	Unit	Specifications
SKU: 0601190200		
Total length	mm	955
Working length	mm	580
Core length max.	mm	530
Core diameter max.	mm	300/350*
Angle adjustment	°	45
Weight	kg	12.6

*300-350mm: additional distance plate required (2608550628)



GBH 187


Cordless Rotary Hammer with SDS plus



- One Chuck - A single chuck that can fit both SDS-plus and cylindrical/hex drill bits for your wide range of applications.
- Efficiency champion for drilling holes fast with just one battery charge
- Optimized brushless motor and mechanism for faster work with KickBack and Vibration Control protection systems

GBH 187 Professional	Unit	Specifications
SKU: 06119231L0		
Max. impact energy	J	2,4
Rated speed	rpm	0-4.350
Battery voltage	V	18
Drilling dia. concrete, hammer drill bits	mm	4-24mm

Accessories



Hammer drill bit SDS-plus-5X

2608833794

2608833827

Suitable for masonry, concrete and reinforced concrete
Appropriate for all Rotary hammers with SDS-plus holder

Construction ►► Plumbing & Electrical Engineering & HVAC ►► Piping Installation

GWS 750-115


High productivity and the best user protection in its class



Tool does not come with disc

- High removal rate
- Great controlling and easy handling
- Improved motor cooling to handle long-time work
- High overload capability

GWS 750-115 Professional	Unit	Specifications
SKU: 06013940K2		
Rated power input	W	750
No-load speed	rpm	11,000
Disc diameter	mm	115
Grinding spindle thread	m	14
Weight	kg	1.8

Accessories		Diamond cutting disc Professional for Concrete
		2608615059
The low-cost diamond cutting disc that is a problem solver in concrete Sintered diamond cutting segments		



GWS 9-115/125


900W paddle switch SAG delivers and incredible great on safety and power



Tool does not come with disc

- Enhanced user protection thanks to paddle switch that instantly cut off power to the machine when the switch is realised
- Superior cutting and grinding experience

GWS 9-115/125 Professional	Unit	Specifications
SKU: 0601396505		
Rated input power	W	900
No-load speed	rpm	11000
Grinding spindle thread	M	10/14
Rubber backing pad, diameter	mm	115/125
Weight	kg	1,9

Accessories		Diamond cutting disc Professional for Universal 115 x 22,23 x 1,6 x 10 mm
		2608615057
Reliable Cuts in Concrete		

Construction ►► Plumbing & Electrical Engineering & HVAC ►► Piping Installation

GWS 2200-180

Great power, less weight, more control



Tool does not come with disc

- Superior Grinding/Cutting Performance due to power 2200W motor
- Longlife time under tough working enviroment and hevly working load due to robust design and parts
- Additional safety due to Deadman Switch

GWS 2200-180 Professional		Unit	Specifications
SKU: 06018C00P0			
Rated power input		W	2.200
No-load speed		rpm	8500
Grinding spindle thread		M	14
Disc diameter		mm	180
Weight		kg	5,0

Accessories		Expert for Metal cutting disc with depressed centre A 30 S BF, 180 mm, 3,0 mm
		2608600316
	• The low-cost diamond cutting disc that is a problem solver in concrete • Sintered diamond cutting segments	

GWS 2200-230

Great power, less weight, more control



Tool does not come with disc

- Superior Grinding/Cutting Performance due to power 2200W motor
- Longlife time under tough working enviroment and hevly working load due to robust design and parts
- Additional safety due to Deadman Switch

GWS 2200-230 Professional		
SKU: 06018C10P0		
	Unit	Specifications
Rated power input	W	2.400
No-load speed	rpm	8500
Grinding spindle thread	M	14
Disc diameter	mm	180

Accessories		Expert for Metal cutting disc with depressed centre A 30 S BF, 230 mm, 3,0 mm
		2608600226
		<ul style="list-style-type: none">• The low-cost diamond cutting disc that is a problem solver in concrete • Sintered diamond cutting segments

GWS 17-125

Great power, less weight, more control



Tool does not come with disc

- With high power, overload capability, and improved dust protection by air inlets at the backside of the tool. Powerful 1,700 W motor and significantly small grip size KickBack Control, Restart Protection, Vibration Control side handle for high user protection

GWS 17-125 Professional		
SKU: 06017D0200		
	Unit	Specifications
Rated power input	W	1700
No-load speed	rpm	11,500
Voltage, electrical	V	230
Grinding spindle thread	M	14
Disc diameter	mm	125
Main handle	mm	Barrel
Bore size, diameter	mm	22.23
Weight	kg	2.2
Switch		Lockable Switch

Construction ► Plumbing & Electrical Engineering & HVAC ► Piping Installation

GWS 24-230 JH

Great power, less weight, more control





Tool does not come with disc

- New patented motor has high overload capability and delivers up to 2X increased material removal rate
- Precision engineered mechanical system together with the vibration control auxiliary handle reduces the vibration by 13% for the operator
- Soft grip on rear handle improves tool grip and control while working

GWS 24-30 JH Professional		Unit	Specifications
SKU: 06018C30K0			
Rated power input	W		2400
No-load speed	rpm		6,500
Voltage, electrical	V		230
Grinding spindle thread	M		14
Disc diameter	mm		230
Main handle	mm		Barrel
Rubber backing pad, diameter	mm		180 mm
Weight	kg		5.8
Switch			Lockable Switch
Grinding head, diameter	mm		140



Accessories		Expert for Metal cutting disc with depressed centre A 30 S BF, 230 mm, 3,0 mm
		2608600226
	Cutting discs for metal for high requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s	

Accessories		Expert for Metal grinding disc with depressed centre A 30 S BF, 230 mm, 6,0 mm
		2608600228
	Top-class grinding discs for metal for the highest requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s	

GWS 30-230


The powerful tool with the best brake system in its class



Tool does not come with disc

- Powerful 2,800 W brushless motor delivers industry-leading material removal rate
- Low maintenance and reduced tool downtime
- Vibration Control prevents long-term damage to hands
- Safety & Convenience: KickBack Control, Soft Start, Restart Protection, and braking

GWS 30-230 Professional		Unit	Specifications
SKU: 06018G1000			
Rated power input	W		2800
No-load speed	rpm		6,500
Voltage, electrical	V		230
Grinding spindle thread	M		14
Disc diameter	mm		230
Main handle	mm		Rattail
wire cup brush, diameter	mm		230
Weight	kg		5.9
Switch			Lockable Switch
Rubber backing pad, diameter	mm		100

Accessories		Expert for Metal grinding disc with depressed centre A 30 S BF, 230 mm, 6,0 mm
		2608600228
	Top-class grinding discs for metal for the highest requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s	

Construction ► Plumbing & Electrical Engineering & HVAC ► Piping Installation

GSB 18V-60C

The reliable all-rounder – with maximum power



- Best power-to-size ratio in Bosch's 18 V category - with brushless motor and impact drilling function
- Ideal combination of power and size due to 60 Nm of hard torque and a 174-mm head length
- Kick Back Control for increased user protection, safer work, and perfect tool control; precision clutch for convenience
- Bluetooth Connectivity option to connect directly to a smart phone for additional tool control

GSB 18V-60C SKU: 06019G2100	Unit	Specifications
Torque, (soft/hard/max)	Nm	31/60/-
Battery voltage	v	18
Max. drilling diameter in masonry	mm	13
Max. screw diameter	mm	10

Accessories



Probox HSS-G, 1-13 mm

2608587017

25-piece HSS-G ProBox metal drill bit set, DIN 338, 135°



Construction ► Interior Decoration ► Windows & Doors

GWS 750-115


Power and handling – redefined



Tool does not come with disc

- High material removal rate
- Perfect to control and easy to handle
- Optimised cooling of the motor to handle long work times

GWS 750 - 115 Professional SKU: 06013940K2	Unit	Specifications
Rated power input	W	750
No-load speed	rpm	11000
Power output	W	380
Grinding spindle thread	M	M 14
Disc diameter	mm	115
Length	mm	270
Width	mm	73
Height	mm	100
Weight	kg	1,8 kg
Switch		2-way

Accessories		Expert for Inox - Rapido straight cutting disc AS
		2608600545
Cutting discs for inox for high requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s (depending on rpm and disc diameter) Fe/S/Cl < 0.1%		



GSB 16 RE


Power and handling – redefined



comes with a pair of complementary carbon brush

- Robust pot gear housing and clamp shell motor housing for tough jobsite conditions
- Powerful 750 W motor to suit versatile professional needs
- Compact ergonomic design for fatigue-free usage

GSB 16 RE Professional SKU: 06012281K1	Unit	Specifications
Rated power input	W	750
No-load speed, 1st gear	rpm	0 – 3,250
Weight	kg	1.8
Impact rate at no-load speed	bpm	0 – 48,500
Rated torque	Nm	2.1
Chuck capacity, min./max.	mm	1.5 – 13

Accessories		Carbide Multi Wheel cutting disc 125mm
		2608623013
Cutting Wood and Plastic and hard nails with Angle Grinder		

Construction ► Interior Decoration ► Windows & Doors

GBM 13-2 RE

The powerful tool with 2 gears for demanding work



- Powerful motor for drilling up to 13 mm diameter in steel
- 2-speed gearbox: for demanding work
- Fully ball and roller bearing-mounted for long lifetime and precise work

GBM 13-2 RE Professional SKU: 06011B2000	Unit	Specifications
No-load speed	rpm	0 - 1000 / 3000
Chuck capacity	mm	
Drilling dia. in steel	mm	13/8
Drilling dia. in aluminium	mm	20/12
Drilling dia. in wood	mm	32/20
Drill spindle connecting thread	UNF	1/2" - 20



Accessories		Probox HSS-G, 1-13 mm
		2608587017
	25-piece HSS-G ProBox metal drill bit set, DIN 338, 135°	
		Metal drill bits HSS-G, DIN 338 12 x 101 x 151 mm
		2608595077
Twist drill bit made of high speed steel manufactured to DIN 338 Right-hand cutting twist drill bit, Type N, 118° drill bit tip Rolled spiral flute with ground point, vapour-plated Shank equal to drill bit diameter, drill bit colour: black Two-cutter, cylindrical, two flutes Note: Use the universal cutting oil 2 607 001 409 when working with HSS-R metal drill bits		

GBM 1600 RE



Power and Convenience for mixing & drilling applications



- 850W powerful and reliable motor for longer durability
- High torque & high drilling capacity for heavy duty job
- Auxiliary handle and 360° rotates D handle for easy handling
- Durable gear and ball bearing construction for superior robustness

GBM 1600 RE Professional SKU: 06011B00K0	Unit	Specifications
Rated power input	W	850
No-load speed	rpm	0-630
Chuck capacity	mm	1/1
Min./max. torque	Nm	1-16
Nominal torque	Nm	11.0
Weight	Kg	3.0
Drilling in wood (max.)	mm	40
Drilling in steel (max.)	mm	16



Accessories		Metal drill bits HSS-G, DIN 338 16 x 120 x 178 mm
		2608585595
Accessories		Wood auger bit, hexagon 30 x 360 x 450 mm, d 11,1 mm
		2608597651
Suitable for all soft and hard woods, even wet wood Ideal for use in ancillary building trade, for joiners and roofers Can be used in all drills with 13 mm chuck For through-holes, pre-drilling for rafter nails and for deep dowel holes Precision-ground for accurate dimensional stability when drilling Fast drilling rate due to optimised flute geometry High break resistance, fine surface finish		

Construction ► Interior Decoration ► Windows & Doors

GBM 50-2

Good holding power for safe working



- The ideal solution for precise, efficient, and safe metal drilling
- Load indicator makes for long tool life and service display notifies about necessary carbon brush exchanges
- Laser technology for fast set-up; powerful motor makes for precise and efficient drilling; power supply cut-off adds safety


GBM 50-2

SKU: 06011B4020

Unit

Specifications

Rated input power	w	200
Weight	kg	26
Drilling diameter in steel	mm	1,5 / 50

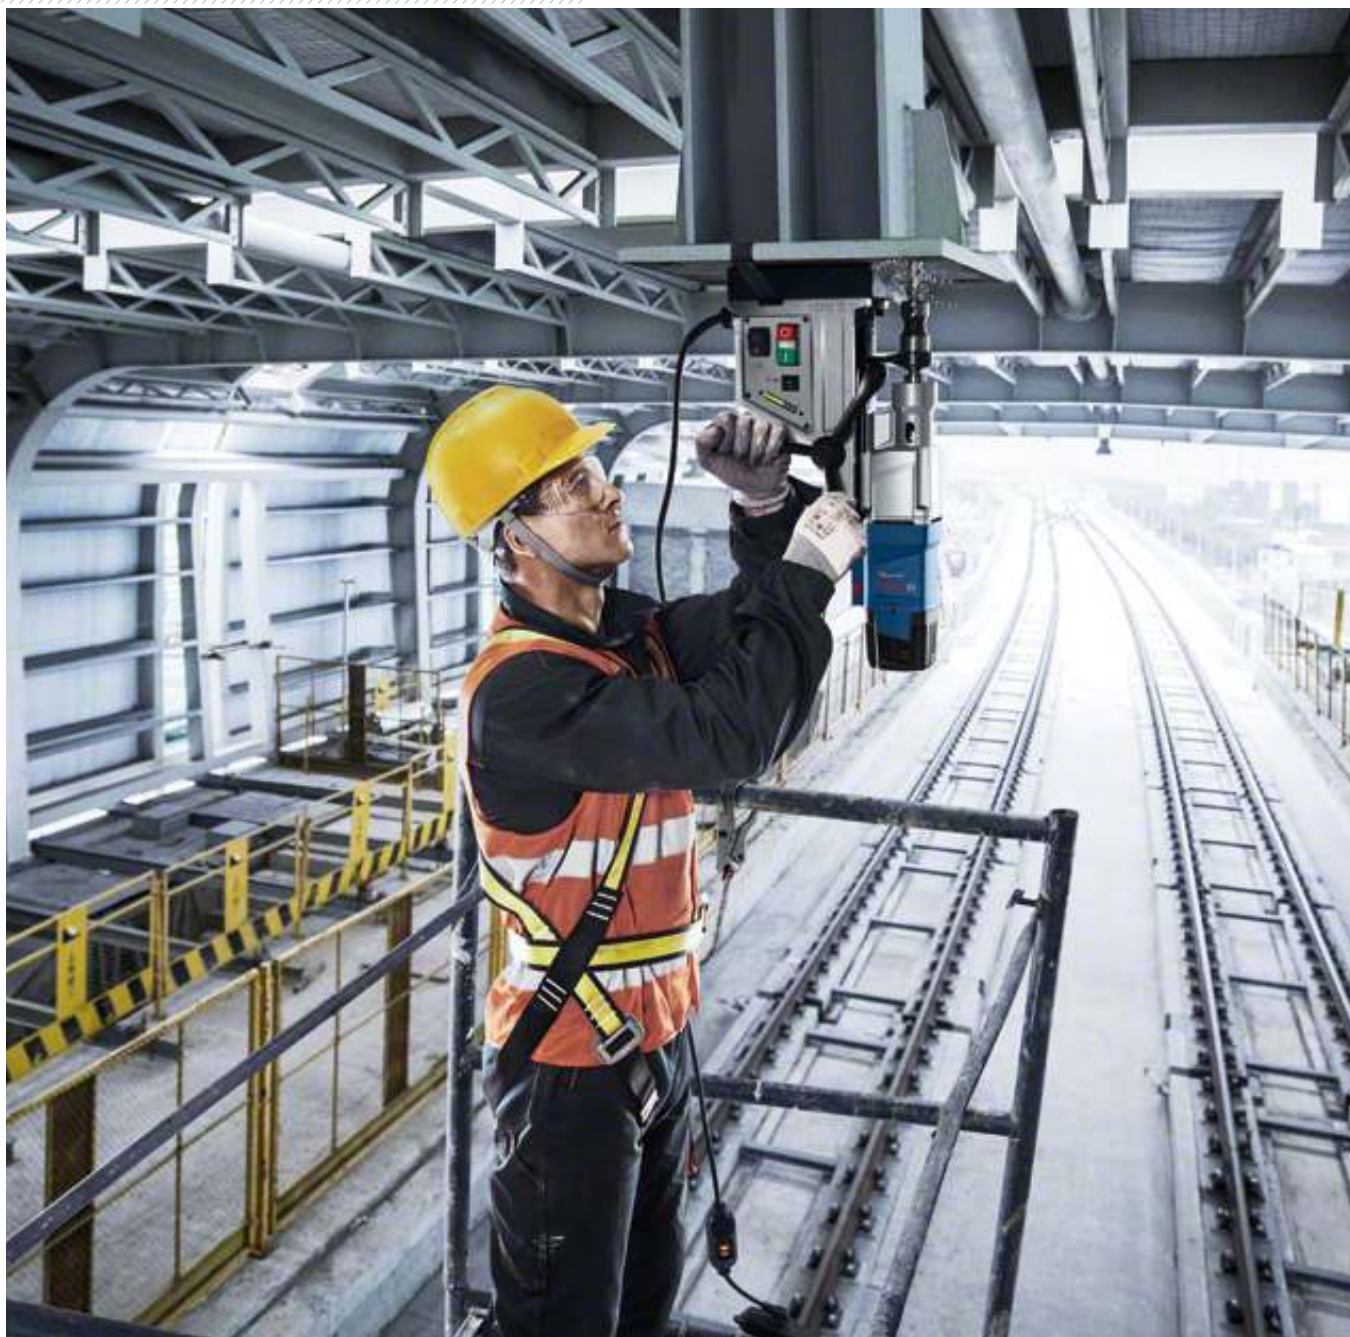



Construction ► Interior Decoration ► Woodworking


GSS 280 AVE

The sander for extremely high surface quality



- The orbital sander for high-end surface quality results in the 280-mm category
- Highest-quality surface results due to its housing with a decoupled sanding unit for consistent contact pressure
- Continuous work enabled by unique vibration damping technology that produces very low vibration
- Hook-and-loop pad and tension system for easy and perfect sanding sheet fitting

GSS 280 AVE SKU: 0601292902	Unit	Specifications
Rated power input	W	350
Oscillating circuit diameter	mm	2,4
Weight	kg	2,7
Sanding plate, width	mm	114
Sanding plate, length	mm	226

Accessories		Sanding Sheet Best for Wood & Paint,115x280mm,G40
		2608605239
	Suitable for sanding wood, paint, varnish, roughcast, Pack of 10 Available in grit sizes 40,60,80 &120	




GHO 26-82D

Comfortable to use due to chip clearance on both sides and cutting depth adjustment up to 2.6 mm



- Small, handy machine with powerful 710-watt motor for all on-site fitting work
- The fastest and least expensive blade changes on the market due to durable Woodrazor blades and the easiest possible adjustment
- Comfortable working due to chip clearance to left or right, as desired

GHO 26-82 Professional SKU: 06015A4301	Unit	Specifications
Rated power input	W	710
Planing width	mm	82
Planing depth	mm	2.6
Weight	kg	2.8
Adjustable rebating depth	mm	9
No-load speed	rpm	18,000

Accessories		HSS Planer Knife Set of Knives 82x3x29mm
		2607000193
	Appropriate for Planers from Bosch, AEG, Black & Decker, Fein, Haffner, Hitachi, Holz-Her, Mafell, Makita, Metabo, Skil	

Note: Other part numbers: 2607001292, 1607000182, 2608635350, 2608635376

Construction ► Interior Decoration ► Woodworking


GST 90 BE

The sturdy tool for heavy-duty applications



Tool comes with complimentary drill bit

- The reliable tool for the toughest jobs
- Long lifetime under extreme conditions thanks to robust SDS saw blade changing system
- Professional stacked construction and aluminium housing for long lifetime

GST 90 BE Professional SKU: 060158F002		Unit	Specifications
Rated power input	W		650
No-load stroke rate	spm		500 - 3100
Weight	kg		2,6
Cutting depth in wood	mm		120
Cutting depth in aluminium	mm		90
Cutting depth in non-alloyed steel	mm		10
Accessories			Jigsaw blade T 244 D Speed for Wood
			2608630058
	Fast Curved Cuts in Softwood and Non-Abrasive Woodworking Materials		


GST 150 BCE

The most powerful tool in its class



Tool comes with complimentary drill bit

- High power reserves, even in hard and thick beams, due to powerful and overload capable 780-watt motor
- Extremely robust and bend-resistant sole plate for the toughest jobs
- High cutting precision due to new saw blade clamping

GST 150 BCE Professional SKU: 0601513000		Unit	Specifications
No-load stroke rate	spm		500 - 3100
Cable length:	m		4.0
Stroke height:	mm		26
Cutting depth in wood	mm		150
Cutting depth in aluminium	mm		20
Cutting depth in non-alloyed steel	mm		10
Weight	kg		2.7
Accessories			Jigsaw blade T 244 D Speed for Wood
			2608630058
	HCS, side set, ground Softwood (5-50 mm), chipboards, wood core plywood, fibre boards, especially for curve cuts		


GST 18 V-LI B

The compact and powerful cordless jigsaw



Tool does not come with battery and charger

- Compact, lightweight design with small grip circumference enables optimum control when sawing
- Powerful battery system for cutting even in thicker or harder materials
- SDS saw blade changes with only one hand

GST 18 V-LI B SKU: 06015A6100		Unit	Specifications
Stroke rate at no load	spm		0 - 2 700
Stroke height	mm		23
Mitre cuts			0-45
Works with battery capacity	Ah°		4,0
Battery voltage	V		18
Cutting depth in wood	mm		120
Cutting depth in aluminium	mm		20
Accessories			Jigsaw blade T 144 D Speed for Wood
			2608630040
	Fast Cuts in Softwood and Non-Abrasive Woodworking Materials		

Construction ► Interior Decoration ► Woodworking

GKS 185-LI

The most powerful Circular Saw in its class!



Comes with complimentary circular saw blade

- Impressive performance thanks to powerful 18V brushless motor
- Dust extraction port connects to Bosch vacuum cleaners for dust-free working
- Cordless optimized blade cuts cleanly and precisely
- Flexible battery platform and maximized battery runtime for long service life

GKS 185-LI Professional		Unit	Specifications
SKU: 06016C1223			
Saw blade diameter	mm	165	
Guide rail compatible		No	
Weight	kg	2.8	
No-load speed	rpm	5,000	
Saw blade bore diameter	Nm	20	
BITURBO		No	
Accessories		Circular Saw Blade Optiline for Wood (H) 235x2.5x35/30/25, 60Teeth (2 reduction rings)	
		2608640895	
	The perfect blade for powerful cuts with clean cut edges in all different kinds of materials.		


GKS 190

The most powerful tool in the entry level class



Comes with complimentary circular saw blade

- With 1400 watts, it has the highest motor power in its class for fast sawing progress in soft and hard wood
- Highest cutting depth (70 mm) and bevel capability (56°) in its class for flexibility in any work situation
- Compact tool design for best handling

GKS 190 Professional		Unit	Specifications
SKU: 0601623090			
Rated power input	W	1.400	
No-load speed	rpm	5 500	
Weight	kg	4.1	
Saw blade bore diameter	mm	20	
Saw blade diameter	mm	184	
Cutting depth (90°)	mm	67	
Cutting depth (45°)	mm	48	
Accessories		Circular Saw Blade Optiline for Wood (H) 184x2.5x20/16, 40Teeth (1 reduction ring)	
		2608640853	
	The perfect blade for powerful cuts with clean cut edges in all different kinds of materials • Using the universal cutting oil 2 607 001 409 increases the lifetime several times over when cutting in metal, e.g. aluminium		


GKS 253

The most powerful Circular Saw in its class!



Comes with complimentary circular saw blade

- Powerful motor with 2.050 W power input for a fast work rate
- Robust design for long-lasting operation in various kinds of applications
- Double the overload lifetime of the current GKS 235

GKS 253 Professional		Unit	Specifications
SKU: 06015A20K0			
Rated power input	W	2050	
Saw blade diameter	mm	235	
Weight	kg	7.6	
No-load speed	rpm	5,300	
Saw blade bore diameter	Nm	25	
Baseplate	mm	383 x 170 mm	
Accessories		Circular Saw Blade Optiline for Wood (H) 235x2.5x35/30/25, 60Teeth (2 reduction rings)	
		2608640895	
	The perfect blade for powerful cuts with clean cut edges in all different kinds of materials.		

Construction ► Interior Decoration ► Woodworking


GKT 55 GCE

Precision and power for a clean cut



- Clean, precise cuts due to high-quality machine components, precision saw blade and matching guide rail system
- Comfortable work, especially indoors, due to highly efficient dust extraction and noise-reduced saw blade
- Adjustable speed, powerful 1400 watt motor and Constant Electronic for cutting different materials such as wood, panel materials, aluminium and acrylic glass

GKT 55 GCE Professional		Unit	Specifications
SKU: 0601675002			
Rated power input	W		1.400
No-load speed	rpm		3 600 - 6 250
Weight	kg		4,7
Saw blade bore diameter	mm		20,0
Saw blade diameter	mm		165
Length	mm		310
Height	mm		240
Cutting depth (90°)	mm		57
Cutting depth (45°)	mm		42

Accessories		Circular Saw Blade Optiline for Wood (H) 160x2.6x20/16, 48Teeth (1 reduction ring)
		2608640732
	For effortlessly clean cuts in panel materials (laminated on one or two sides), abrasive panels, and fine-coated or veneered panels. Also suitable for cutting raw chipboard, acoustic panels and lightweight building panels. Microtec teeth for a long lifetime.	

FSN 1600

Rail technology for exact guidance



- Precise guidance – rails are exactly straight, even when the rail is extended, due to self-aligning connecting piece
- Stable extension – due to the VEL connector for stable and quick connection of guide rails
- Safe operation – anti-splinter guard for clean cut edges and adhesive tapes for non-slip handling

FSN 1600		Unit	Specifications
SKU: 1600Z0000F			
Length	mm		1600

GTS 254

Extremely compact and powerful



- Ideal choice when powerful and accurate cuts are needed
- 545 mm rip cut capacity; cutting depths of 80 mm straight & 55 mm angle
- 1,800 W motor with high torque and ideal overload capacity
- Precision made easy: robust steel table ensures stability while working

GTS 254 Professional		Unit	Specifications
SKU: 0601B450L0			
Rated input power	W		1,800
Saw blade diameter	mm		254
Incline setting	R		45 ° L / 0 °
Weight without cable	mm		555 x 555
Voltage	V		0
No-load speed	rpm		4,300
Saw blade bore diameter	mm		30
Weight	kg		24.4
Tool dimensions			
(width x length x height)	mm		690 x 620 x 1000
Cutting height 90°	mm		80
Cutting height 45°	mm		55
Max. cutting capacity on the right	mm		545

Construction ► Interior Decoration ► Woodworking

GTA 600

GTA 600 Work Bench for GTS 10 J Professional



Compatible with GTS 10 J

- Solid, portable, tool-free design
- Attach and detach saw in seconds
- Easy and lightweight for transport and storage

GTA 600 SKU: 0601B22001	Unit	Specifications
Length of work bench	mm	520
Height of work bench	w	602



GOF 130

No stop, no jams



- Powerful motor provides easy & fast cuts even with heavy applications
- Constant speed results in easy stop and also provides jam-free work with improved cutting efficiency
- Due to ergonomic design with angular handles and soft grips
- Easily reachable buttons for convenient use

GOF 1250 CE Professional SKU: 06016B70PI	Unit	Specifications
Bit holder	mm	6,1/4",8
No-load speed	rpm	11000 - 28000
Maximum router cage stroke	mm	60
Template guide diameter	mm	17,0
Rated power input	W	1300

Accessories



Mixed Router Bit Set 8mm shank
(15pcs)

2607017472

Flush trim bit Flush pattern bit Dovetail bit Chamfer bit Chamfer bit V-groove bit Slotting cutter Rebating bit Roman ogee bit Cove bit Rounding over bit Rounding over bit Straight bit 2 cutter Straight bit 2 cutter Straight bit 3 cutter

Construction ► Interior Decoration ► Woodworking

GCM 12 GDL


Unmatched cutting smoothness and durable precision



Comes with complimentary saw blade

- Extreme cutting smoothness because of innovative and maintenance free gliding system
- Integrated dual line laser supports accurate cuts
- High vertical and horizontal cutting capacity

GCM 12 GDL SKU: 0601B23600	Unit	Specifications
Rated power input	W	1800
No-load speed	rpm	2000
Cutting capacity, 0°	mm	103x341
Cutting capacity, 45° mitre	mm	104 x 341
Cutting capacity, 45° incline	mm	51x341
Saw blade bore	mm	30
Saw blade diameter	mm	305
Incline setting		47 ° L/47 ° R
Mitre setting		52 ° L/60 ° R

Accessories		Circular Saw Blade Expert for Steel (B) 305x2.6x25.4, 60Teeth
		2608643060
Effortless cut, long lifetime, clean cut Fast cut and excellent finish, low vibration and wobbling		

GTM 12 JL


Multi-talented tool with 100% precision



Comes with complimentary saw blade

- Table saw and mitre saw in one tool
- Precise work with integrated laser
- Powerful 1800 W motor for fast work progress (up to 95 mm cutting depth – mitre function and up to 51 mm cutting height table saw function)

GTM 12 JL Professional SKU: 0601B15001	Unit	Specifications
Cutting capacity, 0°	mm	95 x 150
No-load speed	rpm	3 800
Weight without cable	kg	21
Rated power input	W	1 800

Accessories		Expert for Multi Material circular saw blade 305 x 30 x 2,4 mm, 96
		2608642529
For excellent results in non-ferrous metals, aluminium, plastics, epoxy and wood.		

GTA 2600

Unlimited flexibility – The new mobility concept for benchtop tools



Compatible with both GTM 12 JL and GCM 12 GDL

- Fits all Bosch mitre saws
- Tool-free removal of the tool to ensure easy transportation
- Material supports can be pulled out on both sides to a maximum length of 2600 mm

GTA 2600 SKU: 0601B12300	Unit	Specifications
Length of work bench	mm	2600
Weight with/without accessories	kg	19.6
Length of work bench with extension	mm	2600
Height of work bench	mm	947
Dimensions of table when folded up	mm	820

Construction ▮▮▮ Ceiling Hanging ▮▮▮ Drywalling

GTR 55

The universal drywall screwdriver



- ▶ Ultra Flexible Head' for effortless sliding along ceilings and walls, and reduced surface damage
- ▶ Ceiling suction feature ensures high comfort and lighter perceived tool weight
- ▶ Ergonomic L-handle reduces stretch strain during sanding
- ▶ The innovative segment pole design with fast-change lock provides length flexibility and quick adaptation

GTR Professional

SKU: 06017D4020

Unit

Specifications

Rated power input	W	550
Sanding pad diameter	mm	215
No-load speed	rpm	340 - 910
Sanding sheet diameter	mm	225
Disc diameter	mm	230
Backing pad hardness	mm	Soft
Rubber backing pad, diameter	mm	180
Weight	kg	4.8
Sanding pad type		One pad + intermediate pad



GSR 18 V-EC TE

Best combination of power and weight



- ▶ Battery charge with 4.0 Ah
- ▶ Compact design and light weight for fatigue-free work – 1.6 kg (4.0 Ah) Bosch EC motor technology for a long lifetime
- ▶ Shortest head length (207 mm) for precise work

GSR 18 V-EC TE

SKU: 06019C8004

Unit

Specifications

Max torque (hard/soft)	Nm	25/5
No-load speed	rpm	0-4200
Max screw diameter	mm	4.2
Toolholder		1/4" internal hexagon
Weight	kg	1.3

Tool does not come with battery and charger

Construction ► Ceiling Hanging ► Electrical Installation

GBS 20-2 RE

A Breakthrough that sets new standards
Increased performance, Better efficiency



- Increased robustness with pot stacked metal gear housing design
- Powerful 800 W motor for enhanced performance and durability
- 2 gear functionality for dual speed coupled with dual mode impact shifter for increased versatility

GBH GBS 20-2 RE Professional	Unit	Specifications
SKU:06011A21L0		
Rated power input	W	800
No-load speed 1st gear	rpm	0 – 1,100
No-load speed, 2nd gear	rpm	3,000
Rated speed	rpm	740 / 2
Rated torque	Nm	5.2 / 2.0
Chuck capacity, min./max	mm	1.5 – 13
Weight	kg	2.5
Impact rate at no-load speed	bpm	0 – 48,000

Accessories		HSS-Co metal drill bit range
		2608585872-2608585905
		2608588088-2608588103
	High performance HSS-Co bit best for tough application	
	High seed steel with 5% cobalt alloyed for heat and wear resistance. Fully ground for high precision drilling	



GSB 162-2 RE

The powerhouse in any application - even
when dry diamond drilling



Tool does not come with drill bit

- Powerful in every application: Even masonry core drilling up to 162 mm
- Vast applications High versatility for applications in wood, masonry and metal due to impact mechanism and 2-speed gearbox with wide range of rpm
- High durability Metal gear housing and 7 C Motor with ideal heat management

GSB 162-2E Professional	Unit	Specifications
SKU: 060118B000		
Rated speed:	rpm	555 / 1300
Concrete, possible range:	mm	82
Masonry, possible range:	mm	162/82
Weight	kg	4.8

Accessories		Diamond dry core cutter 1 1/4" UNC Best for Universal 32 mm, 300 mm, Ring, 10 mm
		2608580583
	Very high cutting performance and long life. Universal segment for limestone, brick and sandstone	

Construction ▢ Façade ▢ Drilling




GBH 2-24 DRE

The new standard in concrete drilling



- ▶ Excellent drilling performance: due to optimized gear housing set
- ▶ Increased robustness for longer lifetime: due to powerful 790 W motor
- ▶ Easy and cost-effective maintenance: due to spare parts interchangeably

GBH 2-24 DRE Professional		Unit	Specifications
SKU: 06112721K0			
Impact energy	J		2.7
Impact rate at rated speed	bpm		0-4200
No-load speed	rpm		0-1300
Rated power input	W		790
Drilling capacity	mm		24
Weight	kg		2.8

Accessories		Hammer drill bit SDS-plus-5X
		2608833794
		2608833827
Suitable for masonry, concrete and reinforced concrete Appropriate for all Rotary hammers with SDS-plus holder		






GBH 18-18X

The powerhouse in any application - even when dry diamond drilling



Tool does not come with drill bit

GBH 18-18X Professional		Unit	Specifications
SKU: 06119271L0			
Battery voltage	V		18
Impact energy	J		1.5
Impact rate	bpm		0 – 5000
No load speed	rpm		0 – 900
Tool holder			one chuck
Max. drilling concrete	mmm		18
Max. drilling metal	mmm		10
Max. drilling wood	mmm		18
Bare tool weight	kg		1.7
Working LED			Yes

Accessories		Hammer drill bit SDS-plus-5X
		2608833794
		2608833827
Suitable for masonry, concrete and reinforced concrete Appropriate for all Rotary hammers with SDS-plus holder		

Construction ► Façade ► Drilling

GSB 18 V-85 C

The robust, powerful tool



- Extremely powerful and robust 18 V drill driver - with brushless motor and impact drilling function 110 Nm maximum torque and brushless motor make the tool extremely strong
- Full-metal chuck for high durability makes it capable of handling even the toughest applications on the jobsite
- Bluetooth Connectivity option to connect directly to a smartphone for additional tool control

GSB 18 V-85 C SKU: 06019G0300	Unit	Specifications
Torque, (soft/hard/max)	Nm	7/85/110
Battery voltage	mm	18
Max. drilling diameter in masonry		16
Max. screw diameter	mm	12


Accessories



New BiM progressor hole saw set

2608594192

Universal Set BiM Progressor for Wood and Metal 20, 22, 25, 32, 35, 40, 44, 51, 60, 64, 76 mm, cutting depth 44 mm

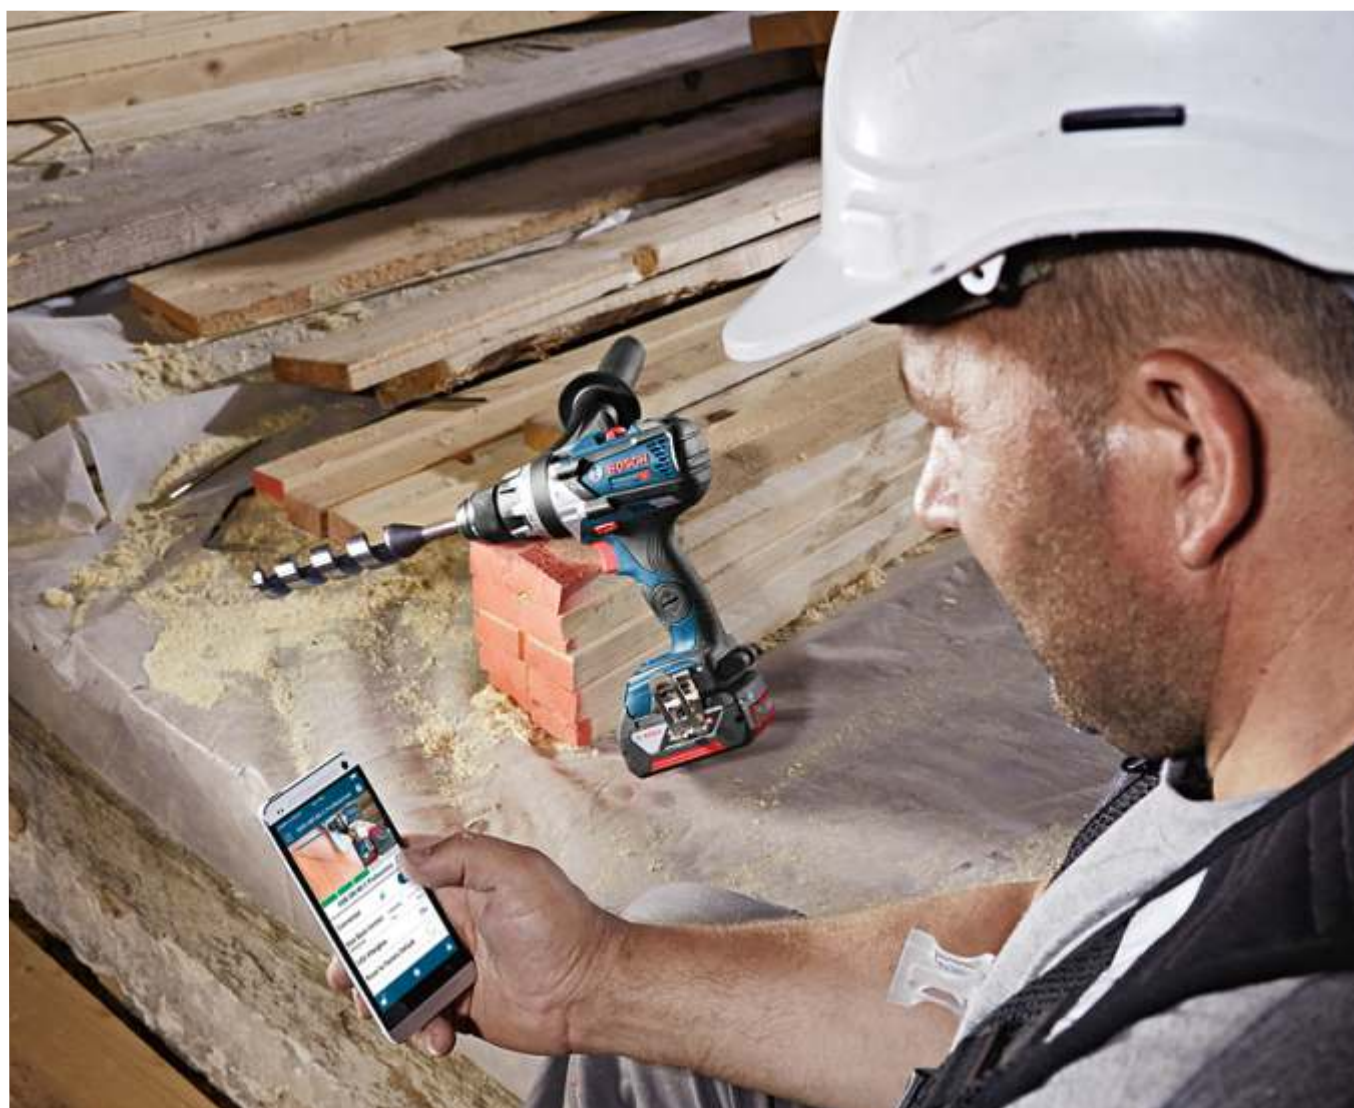

Construction ► Façade ► Cutting


GCM 254 D

Engineered for precise Aluminium Cutting



Tool comes with complimentary saw blade

- Consistently accurate cuts with the help of a highly visible laser line
- Better support for various material cutting provided by detachable box extension
- Easier multiple repeating cuts thanks to length gauge
- Larger cuts with superior precision with 310 mm sliding capacity

GCM 254 D Professional		Unit	Specifications
SKU: 0601B530L0			
Rated power input	W	1,800	
No-load speed	rpm	4800	
Cutting capacity, 45° mitre	mm	90 x 210	
Cutting capacity, 0°	mm	90 x 310	
Mitre setting	R	47 ° L / 52 °	
Saw blade diameter	mm	254	
Weight	kg	17.9	
Bevel setting	R	45 ° L / 45 °	
Cutting capacity, 45° bevel	mm	45 x 310	
Tool dimensions (width x length x height)	mm	574 x779 x645	
Saw blade bore diameter	mm	25.4	
Accessories			
	Multi Material circular saw blade 254 x 30 x 3,2 mm, 96 T		
	2608640451		
The perfect blade for powerful cuts with clean cut edges in all different kinds of materials.			

GCM 254

GTA 600 Work Bench for GTS 10 J Professional



- Accuracy for consistent cuts from the highly visible direct laser guide
- More stable cutting thanks to the detachable box extension
- Length gauge ensures easier repetitive cuts

GCM 254 Professional SKU: 0601B520L0		Unit	Specifications
Rated power input	W		1,750
No-load speed	rpm		4800
Cutting capacity, 45° mitre	mm		90 x 91
Cutting capacity, 0°	mm		90 x 310
Mitre setting	R		47 ° L / 52 °
Saw blade diameter	mm		254
Weight	kg		11.1
Bevel setting	R		45 ° L / 0 °
Cutting capacity, 45° bevel	mm		60 x 130
Tool dimensions (width x length x height)	mm		477 x 559 x 567
Saw blade bore diameter	mm		25.4



Construction ► Façade ► Cutting

GWS 180-LI


User Upgrade from Corded to Cordless with affordable solutions!




Tool does not come with battery and charger

Tool does not come with disc

- High-performance Brushless motor delivers 700W Corded equivalent power
- Balanced design and slim handle, specifically optimised for versatile cutting
- Increased productivity thanks to improved efficiency and runtime
- Next-level convenience thanks to slim handle design and keyless guard

GWS 180-LI		Unit	Specifications
SKU: 06019H9021			
Battery voltage		V	18
No-load speed		rpm	11000
Grinding spindle thread		mm	14
Accessories		Expert for Metal grinding	
		2608600223	
	Top-class grinding discs for metal for the highest requirements		
	Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s		

Accessories		Expert for Metal cutting
		2608600221
	Cutting discs for metal for high requirements Appropriate for hand-held angle grinders Maximum circumferential speed: 80 m/s	


**GWS 2200-230**

Compact powerful tool for the toughest jobs



- Powerful 2200 W Champion motor – for fast work progress
- Low weight for optimum handling

GWS 2200-230 SKU: 06018C10P0		Unit	Specifications
Rated power input		W	2.200
No-load speed		rpm	6500 -8500
Disc diameter		mm	180
Grinding head, diameter		mm	140
Weight		kg	5,2
Switch type		Lockable Switch	

Accessories		Diamond cutting disc Professional for Concrete 230 x 22,23 x 2,3 x 10 mm
		2608602200
	The low-cost diamond cutting disc that is a problem solver in concrete Sintered diamond cutting segments	

Construction ►► Flooring ► Tiling


GDC 140

More cutting power with the longest lifetime in its class



- Powerful 1300 W marble saw for fast and precise cutting in marble/granite/tile/stone
- Good dust insulation for maximum tool durability
- Handy, lightweight 2.8 kg

GDC 140 SKU:06013800L0	Unit	Specifications
Rated power input	W	1300
No-load speed	rpm	12000
Saw blade diameter	mm	110
Saw blade bore	mm	20
Weight	kg	2.8

Accessories		Diamond cutting disc Professional for Ceramic 110 x 22,23 x 1,6 x 7,5 mm
		2608602535
	•For clean cut edges in ceramic tiles The low-cost solution for all-round use in tiles. Sintered cutting rim	



Industrial and Manufacturing

Every part of industrial and manufacturing industry is critical, demanding careful, stringent and tough application. Safe, stable and robust power tools are required in the entire process of this industry.





Industrial and Manufacturing

GPO 14 CE


The handy tool for highly polished results



*****Comes with complimentary wood bonnet*****

- Good handling due to ergonomic handle with softgrip
- Compact tool with only 2.5 kg – for comfortable working
- Powerful 1400 watt motor with soft start for low-fatigue polishing of large surfaces

GPO 14 CE Professional SKU: 0601389003	Unit	Specifications
Rated power input	W	1,400
No-load speed	rpm	750 - 3000
Grinding spindle thread	M	14
Rubber sanding plate, diameter	mm	180
Weight	kg	2.5

Accessories		Lambswool bonnets
		2608612026
	For Polishing Old Varnish and Surfaces After Sanding	



Industrial and Manufacturing

GDX 18V-200 C

The versatile tool for powerful screw driving



- ▶ Ready for all applications, thanks to 2 in 1 bit holder: ¼" internal hex and ½" square drive
- ▶ Powerful use even in hard to reach areas thanks to best head length to torque ratio
- ▶ Bluetooth Connectivity module for tool feedback, soft start and service information via mobile device

GDX 18V-200 C Professional Unit

SKU: 06019G4201

Specifications

No-load speed (1st level)	rpm	0-1,100
No-load speed (2nd level)	rpm	0-2,300
No-load speed (3rd level)	rpm	0-3,400
Torque settings		3
Weight excl. battery	kg	1.2
Impact rate	bpm	0-4,000
Impact rate (1st level)	bpm	0-2,300
Impact rate (2nd level)	bpm	0-3,400
Impact rate (3rd level)	bpm	0-4,000



Industrial and Manufacturing

GDS 18V-400

The powerful tool for large screwdriving applicationswrench



- Most powerful device in the mid torque class
- Ideal for various bolting applications
- Powerful enough to tighten M20 bolts (30mm nuts) thanks to 400 Nm torque
- Improved robustness thanks to higher lifetime of the critical components

GDX 18V-400 Professional

SKU: 06019K00L0

	Unit	Specifications
Battery voltage	v	18.0
Torque, max.	Nm	400
No-load speed	rpm	0-2,500
Tool holder		1/2" Square
Breakaway torque, max.	Nm	600
No-load speed (1st level)	rpm	0-2,500
No-load speed (2nd level)	rpm	0
No-load speed (3rd level)	rpm	0-0
Weight excl. battery	kg	1.25
Impact rate	bpm	3,700



GDS 18V-1050 H

The powerful tool for large screwdriving applicationswrench



- Impressive power with cordless freedom thanks to ProCORE 18V batteries and brushless motor
- High performance motor with a tightening torque of 1,050 Nm and a breakaway torque of up to 1,700 Nm
- Ideal versatility and controlled power due to 3-speed/torque settings

GDX 18V-1050 H Professional

SKU: 06019J8522

	Unit	Specifications
Battery capacity	Ah	5
Battery voltage	v	18.0
Torque, max.	Nm	1,050
No-load speed	rpm	0-800
Tool holder		3/4" Square
Torque, max. (hard screwdriving applications)	Nm	1,050
Breakaway torque, max.	Nm	1,700
Torque adjustment range, min./max., 1st level	Nm	0/350
Torque adjustment range, min./max., 2nd level	Nm	0/750
Torque adjustment range, min./max., 3rd level	Nm	0/1050
No-load speed (1st level)	rpm	0-800
No-load speed (2nd level)	rpm	0-1,200
No-load speed (3rd level)	rpm	0-1,750
Torque settings		3
Weight excl. battery	kg	2.9
Impact rate	bpm	0-2,600
Impact rate (1st level)	bpm	0-1,600
Impact rate (2nd level)	bpm	0-2,400
Impact rate (3rd level)	bpm	0-2,600



Industrial and Manufacturing


GDS 18 E

The versatile tool for powerful screw driving



- For wheel fitting on cars, scaffolding and shelf construction, in the workshop and in service centres
- Favourable centre of gravity thanks to centre grip enables fatigue-free one-handed operation
- High impact performance with low weight

GDS 18 E Professional		Unit	Specifications
SKU: 0601444000			
Rated power input	W	500	
No-load speed	rpm	800-1900	
Impact rate	bpm	1000-2600	
Toolholder		1/2" external square	
Torque, max. (hard screw driving applications)	Nm	250	

Accessories		9-piece socket set
		2608551101
	1/2" Shank inch Socket set with lenght 38 mm. Socket sizes in set 10, 11, 13, 17, 19, 21, 22, 24, 27 mm	



GDS 24

The versatile tool for powerful screw driving



- For wheel fitting on trucks, screw joints in steel construction and mechanical engineering, as well as in tank and pipeline construction
- Auxiliary handle with backing pad that can be fitted in two positions for better handling
- Hanging hook for attaching to a balancer

GDS 24 Professional		Unit	Specifications
SKU: 0601434108			
Rated input power	W	800	
Voltage, electrical	v	230	
Rated speed	rpm	950	
Weight	kg	5.7	
Torque, max. (hard screwdriving applications)	Nm	600	
Torque, max. (soft screwdriving applications)	Nm	300	
Bit holder	Square	3/4"	

Industrial and Manufacturing

GDS 18V-1600 C

The versatile tool for powerful screw driving



- Maximized power with cordless freedom thanks to BITURBO
- Brushless technology and ProCORE18V batteries
- Exceptionally powerful impact wrench with a 1,600 Nm tightening and 2,200 Nm breakaway torque
- Auto Bolt Release (ABR) mode ensures comfortable handling by avoiding the loss or drop-down of metal bolts or nuts

GDS 18V-1600 Professional SKU: 06019M1000		Unit	Specifications
Battery voltage	V		18.0
Torque max.	Nm		1600
No-load speed	rpm		0-800
Tool holder			3/4" Square
Breakaway torque, max.	Nm		2,200
Torque adjustment range, min./max., 1st level	Nm		0/600
Torque adjustment range, min./max., 2nd level	Nm		0/1100
Torque adjustment range, min./max., 3rd level	Nm		0/1600
No-load speed (1st level)	rpm		0-800
No-load speed (2nd level)	rpm		0-1,300
No-load speed (3rd level)	rpm		0-1,750
Torque settings			3
Weight excl. battery	kg		3.2
Impact rate (1st level)	bpm		0-1,550
Impact rate (2nd level)	bpm		0-2,200
Impact rate (3rd level)	bpm		0-2,350
BITURBO			Yes



Industrial and Manufacturing

GSB 18V-90 C

The versatile tool for powerful screw driving



- Powerful brushless motor delivers high power with 64 Nm and
- 2,100 rpm maximising your efficiency on the job site
- 13-mm metal chuck ensures increased robustness and great torque transfer for every job
- Switchable Kickback Control and switchable Precision Clutch ensure perfect control and high protection for user and tool

GDX 18V-400 Professional SKU: 06019K6106	Unit	Specifications
Battery voltage	V	18.0
Torque (soft/hard/max.)	Nm	36/64
No-load speed (1st gear / 2nd gear)	rpm	0 – 630 / 0 – 2,100
Max. impact rate	bpm	29,500
Chuck capacity, min./max..	mm	1.5 / 13
Weight excl. battery	kg	1.2
Torque settings		21



GBL 800 E

The powerful tool for large screwdriving applicationswrench



- Strongest air flow for better work efficiency
- Highest air flow volume
- Powerful motor

GBL 800 E Professional SKU: 0601980490	Unit	Specifications
Rated input power	W	820
Weight	kg	2.25
Volumetric flow rate	Nm	4.5 m ³ /min
No-load speed	rpm	16,000

Industrial and Manufacturing

IDS 18V - 650 T

Cordless Industrial Wrench




NEW

Available in October 2025

IDS 18V - 650 T Professional

	Unit	Specifications
Battery voltage	V	GBA 18
Torque (hard)	Nm	30 - 140
No-load speed	rpm	0 - 2,500
Direction of rotation		R/L
Comment	w/o	battery pack
Weight	kg	1.2

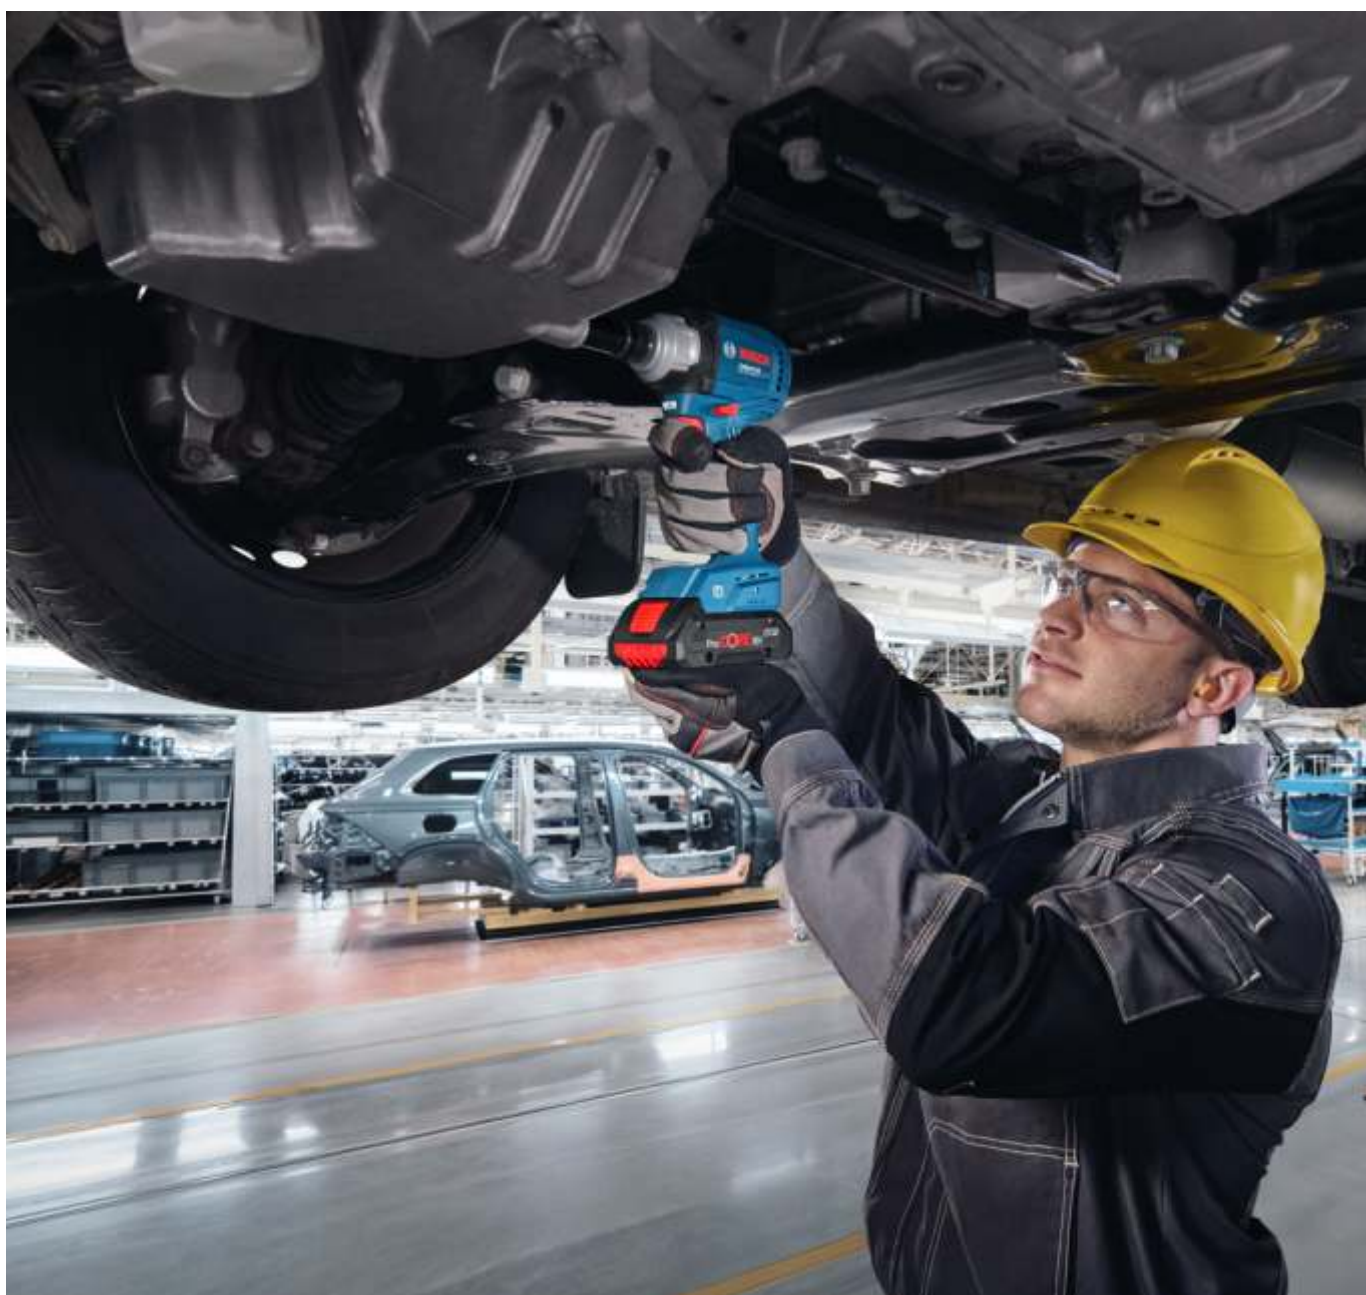

Industrial and Manufacturing

GDS 18V-650 T

The versatile tool for powerful screw driving



- Powerful brushless motor delivers high power with 64 Nm and
- 2,100 rpm maximising your efficiency on the job site
- 13-mm metal chuck ensures increased robustness and great torque transfer for every job
- Switchable Kickback Control and switchable Precision Clutch ensure perfect control and high protection for user and tool

GDS 18V-650 T Professional		Unit	Specifications
SKU: 06019K6106			
Torque (hard)	Nm		30 – 140
Speed	rpm		0 – 2,500
Bit holder			1/2" Square
Direction of rotation			R/L
Weight	kg		1.2
Comment			w/o battery pack
Battery			GBA 18V



ISR 18V-30

The powerful tool for large screwdriving applicationswrench



ISR 18V-30 Professional		Unit	Specifications
Torque, from (hard)*	Nm		9
Torque, to (hard)*	Nm		30
Torque (hard)*	Nm		9 – 30
Speed, from*	rpm		0
Speed, up to*	rpm		1,400
Speed*	rpm		0 – 1,400
Direction of rotation			R/L
Weight*	kg		0.7





Measuring tools from Bosch offer outstanding precision and the greatest ease of use. Due to their robustness, the digital measuring tools guarantee the most accurate results also in day-to-day construction site applications – whether it be levelling, measuring distances, angles and inclines, or detecting all different kinds of materials.

Measuring Technology.

MEASURING

Laser measures – comparisson



● Available

— Not available

GLM 25



Laser Color	Red
Recommended area of use	
Visibilty under bright conditions	■ ■ □ □ □
Measuring range	0.15 – 25 m
Accuracy**	±2.0 mm
Measurement Unit	m/ft/inch
IP class	IP54
Drop resistance	1.0 m
Bluetooth®	—
Camera Viewfinder	—
Vibration Feedback	—
Power Supply	Alkaline (2x AAA)
Flip Screen	
Inclinometer 	—
Indirect Measurements 	● * * *
Big Numbers Mode 	—
Stake Out 	—
Wall Area 	—

*Evaluation and comparison between the listed professional laser measures

GLM 40**GLM 50-22****GLM 50-27 C****GLM 100-25 C****GLM 150-27 C**

Red

Green

Red

Red

Red

Measurements in normal conditions up to 50 m

Long-distance measurements in normal and bright indoor and outdoor conditions



0.15 – 40 m

0.05 – 50 m

0.05 – 50 m

0.08 – 100 m

0.08 – 150 m

±1.5 mm

±1.5 mm

±1.5 mm

±1.5 mm

±1.5 mm

m/cm/mm/ft/inch/
ft-inchm/cm/mm/ft/inch/
ft-inchm/cm/mm/ft/inch/
ft-inchm/cm/mm/ft/inch/
ft-inchm/cm/mm/ft/inch/
ft-inch

Ip54

IP65

IP65

IP54

IP54

1.0 m

1.5 m

1.5 m

1.0 m

1.0 m

Alkaline
(2x AAA)Alkaline (2x AA)
opt. replaceable Li-ionAlkaline (2x AA)
opt. replaceable Li-ionAlkaline
(3x AA)Integrated
Li-ion

**Plus use-dependent deviation

***Indirect Height

MEASURING

As a professional tradesperson, you often have to spread yourself thin: multitasking to stay on track and meet deadlines. Time is precious and you can't afford to waste it. Isn't it good to know that you can rely on our high-performance tools to help you measure up quickly, easily and accurately?

Choose from an array of high-tech devices with special features for quick results, calculations, documentation and more time on your side.



Outdoor laser measure



Indoor laser measure



IMPRESSIVE ACCURACY

Our measuring tools are not only extremely robust but also precise due to our high-performance sensors and the thorough function checks which are carried out on all measuring tools at the end of the manufacturing process. With our robust and precise measuring tools, you are therefore perfectly equipped to work as precisely as possible.



Final tool test



Function tests
under extreme
conditions



Advanced calibration
procedure



Highest certified
manufacturing
standards

WATER AND DUST PROTECTION

Our measuring tools are protected against water and dust, and can be used indoors or outdoors in all weather conditions.

You can therefore also use our tools when wearing wet and dirty gloves, and clean them without any problems. This saves time



Waterproof adhesive
bonds



Seamless rubber seal
between the housing
shells






Sealed USB port



Silicone seals on
mechanical switches

FUNCTIONS

	Measurement accuracy	± 1,5 mm	± 1,5 mm	± 1,5 mm	± 1,5 mm	± 1,5 mm	± 1,5 mm
	Memory	10	10	10	30	50+1	50+1
	Measurement of distances, areas and volumes		✓	✓	✓	✓	✓
	Protection index	IP 54	IP 54	IP65	IP65	IP 54	IP 54
	Continuous Measurement	✓		✓	✓	✓	✓
	Addition/subtraction		✓	✓	✓	✓	✓
	Retractable tip					✓	✓
	Measuring wall surfaces	✓			✓	✓	✓
	Self-timer function					✓	✓
	Minimum/maximum function			✓	✓	✓	✓
	Tilt measurement				✓	✓	✓
	Indirect distance measurement				✓	✓	✓
	Simple indirect measurement of heights		✓	✓	✓	✓	✓
	Double indirect measurement of heights				✓	✓	✓
	Gap tracking function				✓	✓	✓
	Trapezoid function					✓	✓
	Built-in viewfinder/target image					✓	✓
	Bluetooth® Connection				✓	✓	✓
	USB Connection						✓
	Green beam						

CHOOSE YOUR
LASER
RANGEFINDER
CAREFULLY

Scope



GLM 25-23
SKU : 0601072W00



GLM 40
SKU : 0601072S00



GLM 50-22
SKU : 0601072S00



GLM 50-27 C
SKU : 0601072T00



GLM 100-25 C
SKU : 0601072Y00



GLM 150-27 C
SKU : 0601072Z00



GLM 40 PROFESSIONAL WITH 2 BATTERIES (AAA)

0601072900

- Includes all major measurement modes, including distance, area, volume and indirect height measurement
- Easy to read thanks to the backlit screen displaying the last three results measuring
- Memory function automatically records the last 10 measurements for quick reference



GLM 50-22 PROFESSIONAL WITH 2 BATTERIES (AA)

0601072S00

- Ideal rangefinder for harsh construction site conditions thanks to Ip65 certification and shock-absorbing housing allowing it to withstand a 1.5m drop onto concrete
- Customizable button to configure measurement functions of favorite settings
- Intuitive user interface offering a choice of 30 languages, with new help function and large digit mode for better visibility



GLM 50-27 C PROFESSIONAL WITH 2 BATTERIES (AA)

0601072T00

- Very good visibility during long-distance measurements in very bright interiors
- Ideal for demanding construction work thanks to IP 65 protection, shock-absorbing rubberized housing and the ability to withstand drops from a height of 1.5m
- Fast documentation and rapid data transfer with Bluetooth® connectivity and the Bosch MeasureOn



GLM 100-25 C PROFESSIONAL WITH 3 BATTERIES (AA)

0601072Y00

- Precise laser measurement up to 100 m away thanks to the digital viewfinder zoom function
- Easy reading on the large, high-contrast IPS color display with automatic display rotation
- Easy data archiving Bluetooth® connectivity



GLM 150-27 C PROFESSIONAL












0601072Z00

- Precise long-distance laser measurement thanks to the digital viewfinder with zoom function
- Easy reading on the large, high-contrast, auto-rotating IPS color display
- Easy data transfer with Bluetooth® connectivity and USB documentation purposes





FUNCTIONS

	Magnetic metals	120 mm	200 mm
	Non-magnetic metals	80 mm	200 mm
	Live electrical cables	50 mm	80 mm
	Wooden structures	30 mm	38 mm
	Plastic pipes		80 mm
	Protection index	IP 54	IP 5X
	Dual Power		✓
	Drilling depth display		✓
	Displaying the depth of detected objects		✓
	Self-calibration	✓	✓
	USB connection		✓

CHOOSE YOUR
MATERIAL
DETECTOR
CAREFULLY



GMS 120-27
NEW

SKU : 0601081700











D-TECT 200 C

SKU : 0601081600

NEW

FUNCTIONS

	Cable length	150 cm
	Cable diameter	8,3 mm
	Top of image indication	✓
	Technology quick connector	✓
	Dual Power	✓
	Saving photos and videos	✓ Photos
	USB-C + SD card connection	✓ USB
	Bluetooth connection	













CHOOSE YOUR
INSPECTION
CAMERA
CAREFULLY



GIC
12V-4-23 C
NEW

SKU : 0601241500

FUNCTIONS

	Camera	✓
	Memory	500
	Bluetooth connection	✓
	Protection index	IP 53
	Dual Power	✓
	Colour screen	✓
	screen Precision	3 °C
	Sensitivity	50 mk NETD
	Pixels	19 200
	Resolution	160 x 120
	Voice annotation	
	Simultaneous image	✓

CHOOSE YOUR
THERMAL
DETECTOR/
CAMERA
CAREFULLY

Measuring range



GTC 400 C

SKU : 0601083101

400 °C

-10 °C

NEW

GMS 120-27 WALL DETECTOR

0601081700

Our bestseller, even more efficient

Display focused on the essentials
for an intuitive interpretation of result



Reliable detection results
Thanks to an intuitive display,
center indication and material
information



Available in October 2025

Ideal for tough construction sites
thanks to the IP 54 protection rating
against dust and water

Reliable detection of objects
Up to the 12 cm

Simplified mode and improved icons
For greater ease of use

Ergonomic handling
For finger protection that protects
the wall from fingerprints



Technical characteristics	
Detection depth max	
Magnetic metals	120 mm
Non-magnetic metals	80 mm
Live wire	50 mm
Wooden structure	30 mm
Length x width x height	186 x 86 x 33 mm
Weight	0,27 kg

Composition	
Battery	2x1,5V AA
Strap	✓
Cover	✓
Packaging	Cardboard box
Reference	0 601 081 700
Code EAN	4 053 423 25533 1



D-TECT 200 C CONNECTED WALL SCANNER

0601081600

Exceptional detection results and easy documentation

User interface
Modern and intuitive allowing
an illustration of detected objects



Connected detector
For constant updating

Multiple views
Providing better results
in varied situations



Screenshot
For quick and simplified
documentation

Flexible
With possible use on battery
(thanks to the Dual Power AA1 adapter)
or on 12V battery



Available in October 2025

USB-C cable and SD card
Included for fast data exchange



Detection depth of 200 mm
To detect even deeper objects



Radar technology
For greater precision



Technical characteristics	
Detection depth max	Detection depth max
Magnetic metals	200 mm
Non-magnetic metals	200 mm
Live wire	80 mm
Tuyau rempli d'eau	80 mm
Wooden structure	38 mm
Auto deactivation	0-30 min
Length x width x height	104 x 51 x 204 mm
Weight (batteries)	0,64 kg

Composition	
Batteries or battery	4x1,5V AA
Charger	
Dual Power AA1 Adapter	✓ 1608 M00 C1B
Cover	✓
Packaging	Coffret standard
Reference	0 601 081 600
Code EAN	3 165 140 98814 8



GIC 120 C Inspection Camera

Efficient inspection and documentation of hard-to-reach areas



- For optimum special orientation, the ‘Up is Up’™ function rotates and simultaneously aligns the image on a large screen
- Directly transfers images and videos via USB cable for quickly storing high-quality documentation of critical areas
- Dual Power Source technology allows for use with a 12 V Li-ion battery or standard alkaline batteries

GIC 120 C SKU: 0601068005	Unit	Specifications
Battery voltage	V	12
Display size	“	3.5
Display resolution	px	320 x 240
Diameter of camera head	mm	8.5
Length of camera cable	cm	120
Number of LED lighting stages		3
Weight	kg	0.64



GWM 32

The lightweight, handy measuring wheel



- Ergonomic pistol grip and lightweight aluminium construction for ease of use
- Telescopic shaft with continuously variable height adjustment for more flexibility and comfort
- Die-cast aluminium wheel with robust rubber tread for use on any surface

GWM 32 SKU: 0601074000	Unit	Specifications
Wheel diameter (circumference)		318.5 mm (1 m)
Max. measured value	mm	9999.99
Handle		Telescopic handle
Material		Aluminium
Measurement accuracy		1 dm/100 m
Weight	kg	1.4



UPGRADE

FUNCTIONS

	Horizontal leveling	✓	✓	✓	✓
	Vertical leveling	✓	✓	✓	✓
	Dual Power		✓		50 m
	Parallel leveling				✓
	Squaring	✓	✓	✓	✓
	Protection index	IP 55	IP 55	15 m	15 m
	Bluetooth® connection	12 m	12 m		
	Green beam		✓		
	Receiving cell				LR 6

CHOOSE YOUR
LINE LASER
CAREFULLY

GLL 12-22 SKU : 0601065220	GLL 12-22G SKU : 0601065320	GLL 3X SKU : 0601063CJ0	GLL 50-15 XG SKU : 0601063N00

Line range



Line range

With receiving cell



FUNCTIONS

	Horizontal leveling	✓	✓	✓	✓
	Vertical leveling	✓	✓	✓	100 m
	Dual Power		✓	80 m	80 m
	Parallel leveling	✓	✓	✓	✓
	Squaring	✓	20 m	✓	✓
	Protection index	IP 64	IP 65	IP 65	IP 65
	Bluetooth® connection		10 m	30 m	30 m
	Green beam	✓	✓	✓	✓
	Receiving cell	LR 7	LR 7	LR 7	LR 7

CHOOSE YOUR
LINE LASER
CAREFULLY

GLL 2-20G SKU : 0601065000	GLL 80-33 G SKU : 0601065500	GLL 80-33 G SKU : 0601065501	GLL 12V-100-33 CG SKU : 0601065401

GLL 12-22 PROFESSIONAL

0601065220

- Housing with rubber reinforcements providing good protection against dust and water splashes (IP 55) and withstanding the harsh environment of construction sites
- Integrated rotating stand allows for quick and stable assembly and provides good protection for transport and storage
- Great flexibility of use thanks to the Dual Power supply offering the choice between 2 alkaline batteries and a BA 3.7V 1.0Ah A Professional battery available separately



GLL 12-22 G PROFESSIONAL

0601065320

- Housing with rubber reinforcements providing good protection against dust and water splashes (IP 55) and withstanding the harsh environment of construction sites
- Integrated rotating stand allows for quick and stable assembly and provides good protection for transport and storage
- Great flexibility of use thanks to the Dual Power supply offering the choice between 2 alkaline batteries and a BA 3.7V 1.0Ah A Professional battery available separately



GLL 3 X PROFESSIONAL

0601063CJ0

- Compact, modern and robust construction allowing great mobility and offering great durability
- Easy to use in a wide range of applications
- Extremely clear line of sight for maximum work efficiency



GLL 50-15 XG

0601063N00

- Green Laser Technology ensures excellent visibility even in brighter conditions
- Intuitive user-friendly HMI control made for user simplicity
- Detachable rotating platform enables precise laser lines position



GLL 2-20 G PROFESSIONAL

0601065000

- Highly visible 360° horizontal laser line
- Robust rubberized housing with recessed glass window and protected against dust and water splashes (IP 64)
- On/Off switch and single button for mode selection (horizontal line mode, vertical line mode, cross mode)



GLL 80-33 G PROFESSIONAL

0601065501


- Rubber-reinforced housing and IP65 rating for good protection against water and dust
- New keypad for easy selection of laser lines and power saving mode for long battery life
- Dual Power supply allows switching between lithium-ion BA 3.7V 3.0Ah XL battery and AA alkaline batteries for virtually uninterrupted work



GLL 12V-100-33 CG PROFESSIONAL

0601065470

- Durability: Durable design with rubber-reinforced housing and IP65 ensures reliability in harsh working conditions
- Connectivity: Hands-free control via the Leveling Remote app for greater precision and efficiency
- Dual Power Source: Flexibility to switch from 12V Li-Ion battery to AA alkaline batteries to eliminate downtime



GLL 18V-120-33 CG

0601065170

- Durability: Durable design with rubber-reinforced housing and IP65 ensures reliability in harsh working conditions
- Connectivity: Hands-free control via the Leveling Remote app for greater precision and efficiency
- Triple Power Source: Flexibility to switch between 18V & 12V Li-Ion battery to AA alkaline batteries to eliminate downtime



Available in August 2025





Diameter range



Diameter range

With receiving cell



FUNCTIONS

	Horizontal leveling	✓		✓	600 m
	Vertical leveling	✓		✓	
	Squaring	✓		✓	
	Anti-shock function	✓		✓	
	Auto alignment function			✓	
	Protection against vol		300 m		
	Green beam				
	Protection index	IP 54		IP 68	
	Receiving cell	LR 1		LR 60	
	Leveling accuracy (mm/m)	± 0,1		± 0,05	
	Double slope		60 m	✓	20 m

**CHOOSE YOUR
ROTATION
LASER
CAREFULLY**



GRL 300 HV

SKU : 0.601.061.505



GRL 600 CHV

SKU : 0601065F00

PROFESSIONAL
18V
SYSTEM

LASER ROTATIVE **GRL 300 HV**

0601061505

Easy to use with its automatic horizontal and vertical leveling

Alignment
Horizontal, vertical and square

Range up to 300 meters
With receiving cell

Quick setup
In horizontal and vertical mode thanks to the automatic leveling of 8% (± 5°)



Great simplicity of use
One button is enough to turn on and selections are clearly confirmed on the keypad LEDs

Anti-shock function
User-activated, prevents leveling errors in case of shaking or vibration

Technical characteristics		
Scope		60 m (Ø)
Range with receiving cell		300 m (Ø)
Alignment	vertical	✓
	horizontal	✓
	squareness	✓
Precision		± 0,1 mm/m
Diode laser		635 nm, < 5 mW
Rotation speed		150, 300, 600 tr/min
Max autonomy		50 h
Length x width x height		190 x 180 x 170 mm
Weight		1,8 kg

Scope of delivery	Part no.
GRL 300 HV	3.601.K61.505
LR 1 Laser receiver with ec support	0.601.015.400
VARTA charger	
2 x 1.2V HR20 (D) VARTA rechargeable batteries	1.600.A03.2EA
1 x 9V 7HR9V VARTA rechargeable battery	
L-Boxx 238	1.600.A01.2G2

±5°

SELF LEVELLING

SHOCK WARNING

40 mm

TWO SIDED DISPLAY


IP 54





CONNECTED ROTATING LASER **GRL 600 CHV** 0601061F00

Performance for all upgrades up to dual slope

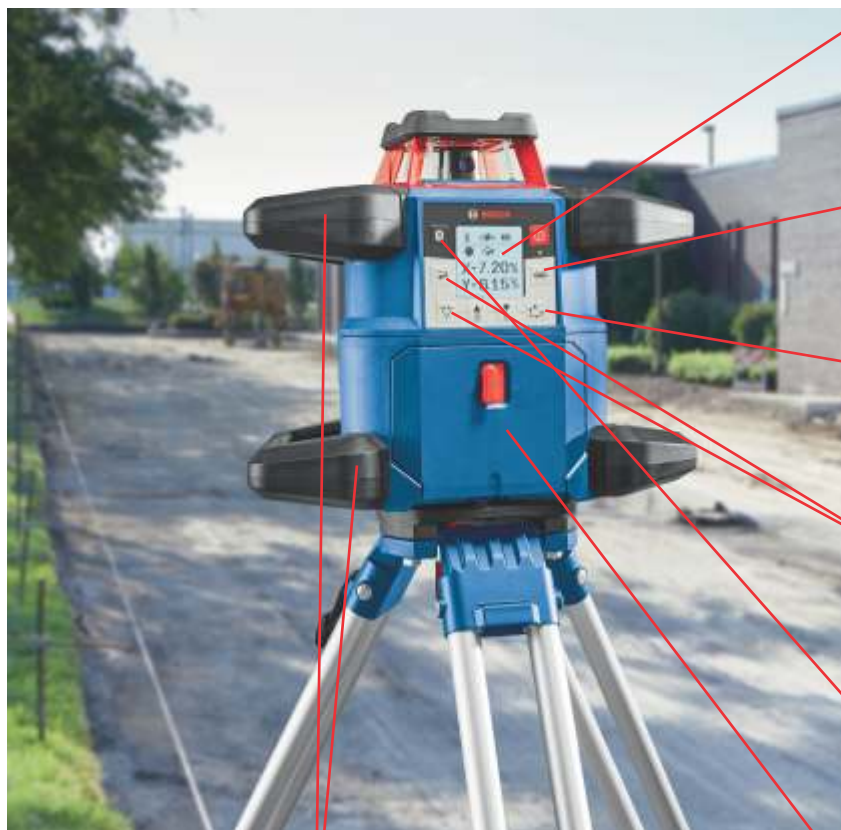

Display

To visualize and simplify function setting and status over view

Leveling on one/two axes

Disables self-leveling for manual slope applications greater than 8.5%

Dual-axis adjustable slope

For easy adjustment of the slope (X and/or Y) for applications up to 8.5%

Variable speed and sweep angle selection

Allows maximum visibility in different lighting conditions

Bluetooth connection

To communicate with the remote upgrade application

Closed battery compartment

Complete IP68 standard including battery compartment

Innovative handle design
Provides protection against tripod tipping up to 2 meters



Technical information

Horizontal leveling accuracy	± 1.5mm à 30m
One/two axis slope operation	%± 8.5
Self-leveling range	± 5°
Working range (diameter) up to	600m
Laser class	2
Resistance to tripod tipping	2m
Protection index	68



**Service
Calibration
Available**



Receiving cell and combined remote control LR 60

- Large reception field (125 mm) to quickly find the laser beam



Tripod BT 170 I + what GR240

- Tripod from 107 to 165 cm with release
- 2.40 m sight with 2 selections
- High resistance to extreme climate conditions

Discover the app Bosch Levelling Remote



Measuring Technologies ►► Leveling ►► Optical Level

GOL 20 D Professional

Extremely robust – ideal for outdoor use



comes with a complementary tripod and measuring rod

- Ideal for outdoor use due to a robust housing with dust and splash protection (IP54)
- Fast aperture for a sharp image of the target
- Compensator lock for safe transport

GOL 20 D Professional SKU: 0 601 068 ...	Unit	Specifications
Unit of measure	degrees	360
Magnification		20 x
Accuracy		± 3.0 mm at 30 m
Working range		up to 60 m



GOL 26 D

Extremely robust – ideal for outdoor use



comes with a complementary tripod and measuring rod

- Designed for outdoor use due to sturdy metal housing with dust and splash protection (IP54)
- Robust design with built-in target collimator and integrated circular vial
- Compensator lock for safe transport

GOL 26 D SKU: 0601068002	Unit	Specifications
Unit of measure	degrees	360
Magnification		26 x
Accuracy		1.6 mm at 30 m
Working range		up to 100 m
Dust and splash protection		IP 54
Tripod thread		5/8"
Operating temperature	°C	-10 – 50
Storage temperature	°C	-20 – 70
Weight, approx.	kg	1.5



OPTICAL LEVEL GOL 32 D

0601068501

Robust and reliable, perfectly suited to out work

Great robustness
With robust metal casting and protection against dust and water splashes

Clear image of the target
Thanks to the wide aperture lens

Continuous angular adjustment
In gon or degrees



Compensator locking device
For secure transport



Calibration Service Available



Technical characteristics

Unit of measurement	400 gons
Magnification	32 x
Scope	Up to 120 m
Precision	1,6 mm/30 m
Length x width x height	215x 135 x 145 mm
Weight	1,5 kg

Composition

Tripod BT 160 + mire GR 500	0 601 091 200 + 0 601 094 300	✓
Adjustment chuck + Allen Key	✓	✓
Lid + plumb line	✓	✓
Packaging	Coffret standard	Coffret standard
Reference	0 601 068 501	0 601 068 503
Code EAN	3 165 140 71139 5	3 165 140 73581 0



BT 160 tripod + mire GR 500

• 97 to 160 cm tripod with quick release, 5 meter 5-section sight

• Great stability and easy transport with shoulder strap

TRIPODS

BT 150 TRIPOD

Compatibility	Interior upgrade / measurement GLL 2-15 G, GPL 3 G, GPL 5 G, GCL 2-15/G, GCL 2-50 G/C/CG, GLM 50-22/25, GLM 50-27 C/CG, GLM 100-25 C, GLM 150-27 C
Thread	1/4"
Height	55-157 cm
Weight	1,0 kg
Reference	0 601 096 B00
Code EAN	3 165 140 80783 8



BT 170 HD TRIPOD

Compatibility	GLL 80/12V/18V G/CG, GRL 300HV/HVG, GRL 400 H, GRL 600 CHV, GRL 650 CHVG, GOL 26 and 32 G/D
Thread	5/8"
Height	107-165 cm
Weight	5,5 kg
Reference	0 601 091 B00
Code EAN	4 059 952 59541 2



BT 300 HD TRIPOD

Compatibility	GLL 80/12V/18V G/CG, GRL 300HV/HVG, GRL 400 H, GRL 600 CHV, GRL 650 CHVG, GOL 26 and 32 G/D
Thread	5/8"
Height	122-295 cm
Weight	7,2 kg
Reference	0 601 091 A00
Code EAN	4 059 952 59542 9



TELESCOPIC ROD / SIGHTS

GR 240 SIGHT

Compatibility	GLL2-50 G/C/CG, GLL 80/12V/18V G/CG, GRL 400 H, GRL 300 HV/HVG, GRL 600 CHV, GRL 650 CHVG, GOL 26 and 32 G/D
Length	Up to 2,4 m
Sections	2
Weight	1,3 kg
Reference	0 601 094 100
Code EAN	3 165 140 55848 8



GR 500 SIGHT

Compatibility	GLL2-50 G/C/CG, GLL 80/12V/18V G/CG, GRL 400 H, GRL 300 HV/HVG, GRL 600 CHV, GRL 650 CHVG, GOL 26 and 32 G/D
Length	Up to 5 m
Sections	5
Weight	1,98 kg
Reference	0 601 094 300
Code EAN	3 165 140 55849 5



(SUITE) RECEIVING CELLS/CLAMPS

RECEPTION CELL

LR 7

Compatibility	GCL 2-50 C/G/CG, GLL 3-80 C/CG
Scope	5-50 m
Precision (fine/coarse)	± 1 mm/± 3 mm
Weight	2x1,5V AA
Protection index	IP 54
Food	0,15 kg
Reference	0 601 069 J00
Code EAN	3 165 140 83557 2



SUPPORTS



UNIVERSAL BRACKET BM 1 PLUS

Compatibility	GCL 2-50 C/CG, GLL 3-80 C/CG
Thread	1/4", magnetic or clip-on
Adaptability	Height adjustable by 7 cm
Reference	0 601 015 A01
Code EAN	3 165 140 78189 3



ACCESSORIES FOR ROTATING LASERS

VISION GLASSES

To improve beam vision and facilitate work in adverse light conditions

For red beam	
Compatibility	GRL 300 HV/HVG, GRL 400 H
Reference	1 608 M00 05B
Code EAN	3 165 140 61749 9



BOSCH PROFESSIONAL QUALITY AS YOU KNOW IT

Electrical testers you can rely on.

Electrical work requires the most reliable tools. That is why we have developed our electrical testers. They are water and dirt resistant as well as shock proof and therefore ensure precision and safety under any condition.

Bosch Professional



**COMING
SOON
Q4 2025**

GVD 1000-17 Professional (EA) 2 x AA, Folding Box

Designed for durability, precision and ergonomic efficiency

Features

Voltage indication

- Visual: the tip glows red, when voltage is detected. Detecting low voltage, the tip glows orange and green when there is no voltage.
- Sound: beeping sound, when voltage is detected
- Vibration: tool vibrates, when voltage is detected

Dual voltage range

- From 24 V to 1000 V AC or 90 V to 1000 V AC for versatile applications
- Higher sensitivity within low voltage mode

Durability

- IP 67 dust and water protection
- High quality material for long-lasting product use
- 2m drop test

Safety

- CAT IV 1000 V safety standard
- Continuous self-test before each use and whilst operation to guarantee a reliable performance

Stable belt clip

- Convenient belt clip keeps it within reach at all times

Rubber grip

- For stable grip and secure handling

Inverted LCD Display

- Display with a high black-and-white contrast + big font for enhanced readability

Flashlight

- Integrated flashlight for low-light conditions



Durability

- Durable design with rubber enforced housing and Ip54 rating ensures reliability in tough working conditions

Inverted LCD Display

- Display with a high black-and-white contrast for enhanced readability

Dual Power Source

- Dual Power Source Capability with BA 3.7V 1.0Ah A Li-Ion Battery for enhanced flexibility

Technical data:

Voltage (AC)	90-1000 V AC / 24-1000 V AC
Frequency range	50 / 60 Hz
Measurement category	CAT IV 1000 V CAT III 1000 V
Power source	2x1.5 V LR03 (AAA)
Protecting rating	IP 67
SKU:	0601077000
EAN code	4053423330045
Tool dimension (LxWxB)	203X63X52 mm
Weight (net) - baretool only	0.056 kg

Scope of Supply	Part no.
Baretool 2x1.5 V LR03 (AAA)	3601K77000
Target Groups	Applications
Electrician	Detecting live voltage (AC) without direct contact. Troubleshooting electrical installations, checking power outlets, ensuring circuits are grounded
HVAC	Quick voltage checks on Heating, ventilation and air conditioning systems.
Facility Managers	Quick voltage checks (outlets/lamps), maintenance purpose.



GDM 600-15 Professional

2 x AA, Folding Box

Designed for durability, precision and ergonomic efficiency

Durability
IP 65 dust and water protection
2m drop test

Inverted LCD Display
Display with a high black-and-white contrast + big font for enhanced readability

Safety
CAT IV 600 V/ CAT III 1000 V safety standard

Power cut off protection:
Prevents operation and isolates battery contacts when battery compartment open, reducing risk of electric shocks

True RMS Fork Meter providing precise

Measuring Strips (MS 90)
High quality measuring strips (scope of supply) made of flexible and long-lasting silicone



Durability
Durable design with rubber enforced housing and Ip54 rating ensures reliability in tough working conditions

Inverted LCD Display
Display with a high black-and-white contrast for enhanced readability

Dual Power Source
Dual Power Source Capability with BA 3.7V 1.0Ah A Li-Ion Battery for enhanced flexibility

Technical data:
Voltage (AC/DC) 600 V
Current (AC) 10 A
Measurement category CAT III 600 V
Power source 2x1.5 V LR06 (AA)
BA 3.7V 1.0Ah A 65

Protecting rating

SKU: 0601077300
EAN code 405342333106
Tool dimension (LxWxB) 210X118X99 mm
Weight (net) - baretool only 0,38 kg



Features

Compactness
Compact tool with a carefully developed ergonomic design including hands-free operational features

Built-in kickstand at the backside of the tool

Magnet hanging solution (AC)

Rubber grip
For stable grip and secure handling

Dual Power Source
Dual Power Source with 2x 1.5V (LR06) AA batteries or BA 3.7V 1.0 AH A Professional for Flexibility and Sustainability



Scope of Supply	Part no.
Baretool	3601K77300
2x1.5 V Lr06 (AA)	
Pouch	
Measuring strip MS 90	1600AO38D2

Target Groups	Applications
Electrician	Measures multiple electrical quantities, such as voltage, current, and resistance. Used for detailed electrical testing and troubleshooting.
Facility	Measures multiple electrical quantities, such as voltage, current, and resistance.



GDM 600-15 Professional

2 x AA, Folding Box

Designed for durability, precision and ergonomic efficiency

Functions

On / Off

Voltage AC / Frequency

Voltage DC

mV (MillivoltAC) / MillivoltDC

Ω(Resistance) / Continuity

Capacitance

Ampere AC / Frequency

Ampere DC



SEL(Selection Mode)

- This gives access to the enhanced Features (gold)

Range

- Change between Manual and Autorange
- Autorange(Default): selects the range with best resolution
- Manual: Selected by the user

Min / Max

- Shows the Min & Max values detected while measuring

Hold

- Freezes current value Long press: Mute sound

COM input terminal


- earth connection (return conductor) for measuring voltage, continuity, and resistance

Input terminal (+)

- Used to measure Voltage, Resistance, Capacitance, Frequency and Continuity

A input terminal

- Used to measure Ampere
- A separate connect or is used due to a 10A fuse is keeping the tool and user safe (easily exchangeable when removing the battery compartment)

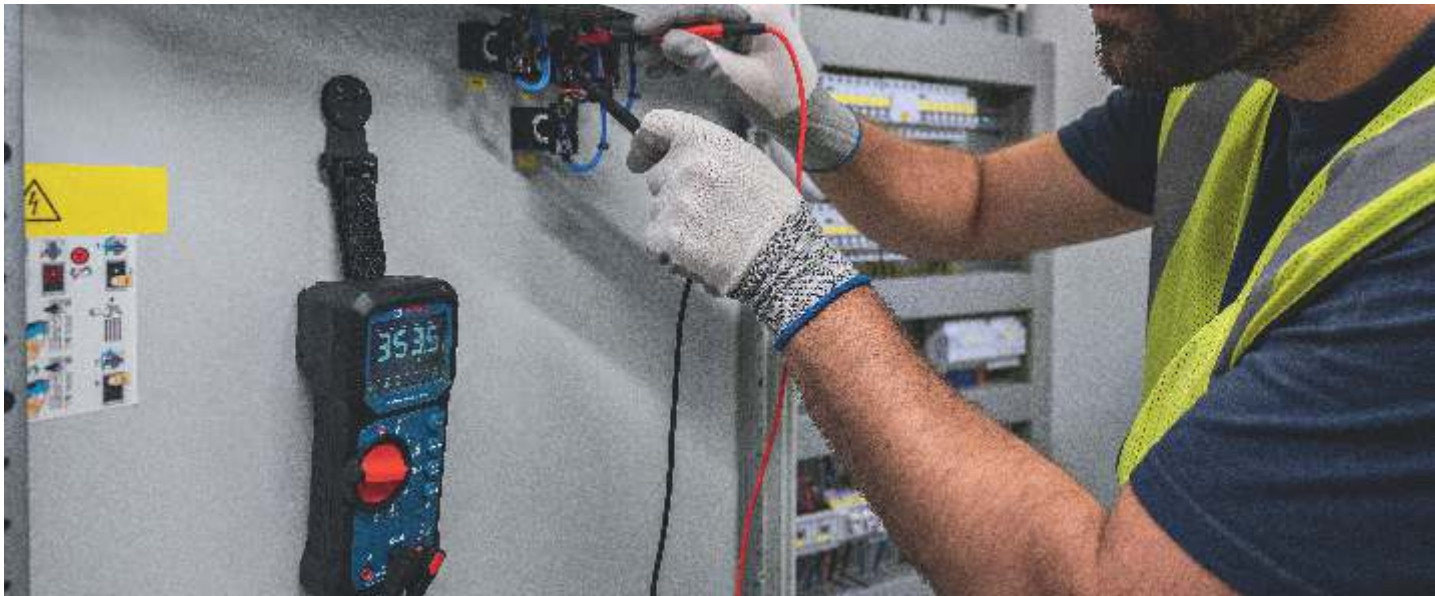

GMF 1000-15 Professional 2 x AA, Folding Box

Designed for durability, precision and ergonomic efficiency

Durability
IP 54 dust and water protection
2m drop test

Rubber grip
For stable grip and secure handling

Safety
CAT IV 600 V/ CAT III 1000 V safety standard

Power cut off protection:
Prevents operation and isolates battery contacts when battery compartment open, reducing risk of electric shocks

True RMS Fork Meter providing precise

Measuring Strips (MS 90)
High quality measuring strips (scope of supply) made of flexible and long-lasting silicone

Features



Fork & NCV function
Non-invasive measurement: no need to open circuits. Safe and fast measurements
Compact jaw opening (16mm) to be able to measure in tight areas.
NCV: Build in non-contact voltage detector

Flashlight
Integrated flashlight for low-light conditions

Inverted LCD Display
Display with a high black-and-white contrast + big font for enhanced readability

Dual Power Source
Dual Power Source with 2x 1.5V (LR06) AA batteries or BA 3.7V 1.0 AH A Professional for Flexibility and Sustainability



Durability
Durable design with rubber enforced housing and Ip54 rating ensures reliability in tough working conditions

Inverted LCD Display
Display with a high black-and-white contrast for enhanced readability

Dual Power Source
Dual Power Source Capability with BA 3.7V 1.0Ah A Li-Ion Battery for enhanced flexibility

Technical data:
Voltage (AC/DC) 18.0 V
Current (AC) 200 A
Measurement category CAT IV 600 V
CAT III 1000 V
Power source 2x1.5 V Lr06 (AA)
BA 3.7V 1.0Ah A 54
Protecting rating
SKU: 06010774000
EAN code 4053423330625
Tool dimension (LxWxB) 226X49X69 mm
Weight (net) - baretool only 297 kg

Scope of Supply
Baretool 3601K77400
2x1.5 V Lr06 (AA)
Pouch
Measuring strip MS 90 1600AO38D2

Target Groups
Electrician
HVAC
Facility

Applications
Quick diagnose and troubleshoot electrical issues. No-invasive current measurement, ideal for light areas.
Mainly checking voltage, amperage and resistance. Quickly diagnose and troubleshoot electrical issues

Electricity | 97

GMC 600-15 Professional

2 x AA, Folding Box

Designed for durability, precision and ergonomic efficiency

Features

Durability

IP 54 dust and water protection
2m drop test

Rubber grip

For stable grip and secure handling

Safety

CAT IV 300 V/ CAT III 600 V
safety standard

Power cut off protection:

Prevents operation and isolates battery contacts when battery compartment open, reducing risk of electric shocks

Clamp

Non-invasive measurement: no need to open circuits. Safe and fast measurements

Inverted LCD Display

Display with a high black-and-white contrast + big font for enhanced readability

Dual Power Source

Dual Power Source with 2x 1.5V (LR06) AA batteries or BA 3.7V 1.0 AH A Professional for Flexibility and Sustainability



Durability

Durable design with rubber enforced housing and Ip54 rating ensures reliability in tough working conditions

Inverted LCD Display

Display with a high black-and-white contrast for enhanced readability

Dual Power Source

Dual Power Source Capability with BA 3.7V 1.0Ah A Li-Ion Battery for enhanced flexibility

Technical data:

Voltage (AC/DC)	600 V
Current (AC)	600 A
Measurement category	CAT IV 300 V CAT III 600 V
Power source	2x1.5 V LR06 (AA) BA 3.7V 1.0Ah A
Protecting rating	54
SKU:	0601077600
EAN code	4053423330656
Tool dimension (LxWxB)	231x49x82 mm
Packaging dimension (LxWxB)	2641x121x84 mm
Weight (net) - baretool only	345 kg

Scope of Supply

Baretool
2x1.5 V LR06 (AA)
Pouch
Measuring strip MS 90

Part no.

3601K77600
1600AO38D2

Target Groups

Electrician

HVAC

Facility

Applications

Measures high current without breaking the circuit. Measures multiple electrical quantities, such as voltage and resistance. Used for detailed electrical testing and troubleshooting.

Mainly checking voltage, amperage and resistance. Measures multiple electrical quantities, such as voltage and resistance.



GVT 1000-15 Professional

2 x AA, Folding Box

Designed for durability, precision and ergonomic efficiency

Features

Durability

IP 65 dust and water protection
1m drop test

Rubber grip

For stable grip and secure handling

Safety

CAT IV 600 V/ CAT III 1000 V
safety standard

Self test to increase safety by
checking integrity of tool

Robust tip protection and storage case

Integrated in test lead

Continuity Testing

For checking complete circuits
and ensuring reliable
connections

RCD buttons/load activation

Triggering of residual current
Protective Devices
(RCDs/FI switch)

Flashlight

Built-in flashlight for low-light
conditions

Long Cable Length

125 cm for optimized work,
e.g. in larger cabinets



Durability

Durable design with rubber enforced
housing and Ip54 rating ensures
reliability in tough working conditions

LED indication

LED display levels to indicate the
voltage range between 12 and 1000 V

Self-test feature

Increased safety with self-test feature to
check integrity of tool

Technical data:

Voltage (AC/DC)	1000 V
Measurement category	CAT IV 600 V CAT III 1000 V
Power source	2x1.5 V LR03
Protecting rating	65
SKU:	0601077800
EAN code	4053423330083
Tool dimension (LxWxB)	261X39X85 mm
Packaging dimension (LxWxB)	340X130X58 mm
Weight (net) - baretool only	408 kg

Scope of Supply

Baretool
2x1.5 V LR06 (AA)
Pouch

Part no.
3601K77800

Target Groups

Electrician

Facility
Managers

Applications

Requires physical contact
with wires or to detect
voltage. Measure voltage for
electrical testing and quick
troubleshooting.

Measure voltage e.g. in
a circuit or outlet.



GVT 1000-15 Professional

2 x AA, Folding Box


Designed for durability, precision and ergonomic efficiency

Functions

Voltage level indicator (LED)

- To indicate voltage range from 12 V up to 1000 V

Buttons for testing an RCD

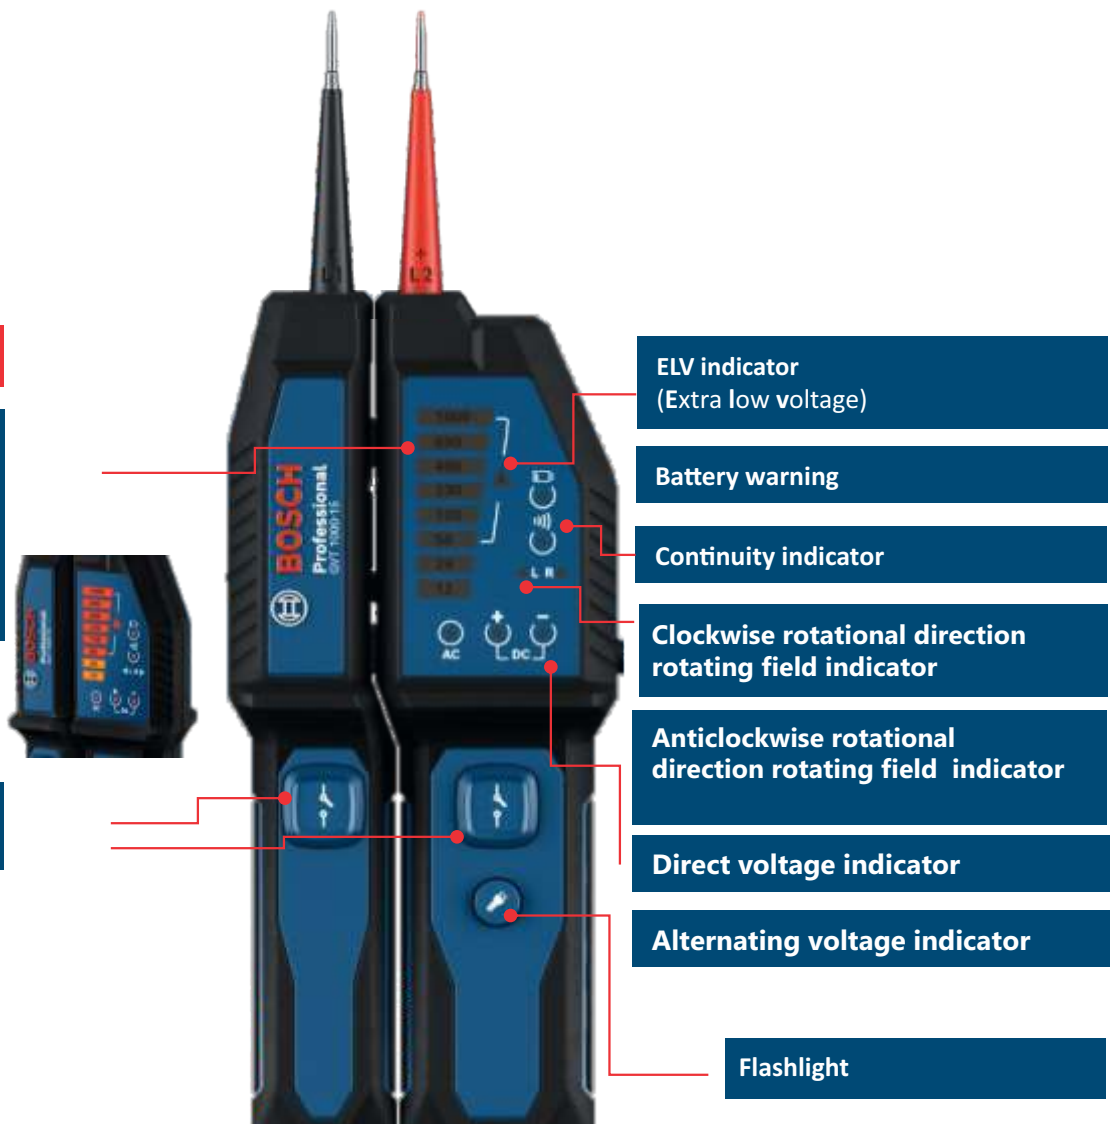

Bosch Warranty

We believe our Heavy Duty power tools are the toughest and most reliable around.

To prove they are made to the absolute highest standards, we are offering you a free one-year warranty for all Heavy Duty professional power tools from Bosch.

The terms of the warranty begin on the date of purchase.

More information can be found in the relevant warranty conditions or terms and conditions of participation.

HEAVY
DUTY1 year
warranty





Robert Bosch Nig. Ltd.
2, Soji Adepegba Close,
Off Allen Avenue
Ikeja, Lagos
Tel: +234 (908) 744 0259
www.bosch-professional.com/ng/en